

DOCUMENTATION OF CONTRACT QUANTITIES

SPECIFIC TASK TRAINING PROGRAM S-14

Conducted by the

ILLINOIS CENTER FOR TRANSPORTATION (ICT) AND IDOT BUREAU OF CONSTRUCTION

FY 20**24**

<u>LINKS</u>

Illinois Center for Transportation (ICT) Doc Class Training Information

Illinois Department of Transportation

Standard Specifications, Supplemental Specifications and Recurring Special Provisions, Construction Manual, Highway Standards, Construction Inspector's Checklists, Project Procedures Guide, IDOT Forms, Work Zone Safety Materials, etc.

Pay Item/ Material Conversion Report

IDOT Materials- Qualified Product Lists

IDOT Manual Sales

DOCUMENTATION CLASS INSTRUCTOR

Greg Renshaw (ICT Doc Class Coordinator).....IL. Center for Transportation.....grenshaw@illinois.edu....(217-300-6375)

IDOT DOCUMENTATION ENGINEER

Mark Neale......Mark.Neale@illinois.gov.... (217-785-4610)



GENERAL REQUIREMENTS

Index of Section A

USE OF THE ICORS FOR DOCUMENTATION A-1
PROJECT DIARY A-3
THE QUANTITY BOOK A-5
FIELD INSPECTION REPORTS/SOURCE DOCUMENTATION A-7
FIELD BOOKS
INITIALS AND DATES
PLAN QUANTITY ACCEPTANCE
PROGRESS DOCUMENTATION A-10
ITEMS THAT MUST BE FINAL MEASURED A-12
USE OF COMPUTERS FOR FINAL DOCUMENTATION A-12
EXTRA WORK A-14
MATERIAL ALLOWANCE A-14
MAXIMUM PAYMENT A-15
YIELD CHECKS A-15
THICKNESS DETERMINATION SCHEDULE A-16
CROSS-SLOPE DETERMINATION REQUIREMENT FOR SIDEWALKS A-20
DOCUMENTATION PROCEDURES FOR CONSTRUCTION ENGINEERING PERFORMED BY CONSULTANTS
REGULATED SUBSTANCES MONITORING A-20
DOCUMENTATION OF PAY QUANTITIES BASED ON WEIGHT TICKETS A-21
FINAL DOCUMENTATION A-27

The policies contained in this section represent the minimum documentation required statewide. Each District may require additional documentation due to conditions specific to the District.

USE OF THE ICORS FOR DOCUMENTATION

Project records are now maintained on a computer-based system known as the Illinois Construction Records Systems (ICORS). ICORS gives the Resident a computerized Diary and Quantity Book, as well as allowing the generation of a number of documents and reports that replace manually generated reports.

The Documentation procedures for ICORS are the same as for non-ICORS projects, i.e., field books, IDR's, etc. as indicated on under Final Documentation.

ICORS Project Diary (Example page F-3)

Documentation Policy requires the resident's name and signature, and the names and initials of personnel assigned to the project, to be written on the first page of the project diary. In ICORS, this can be accomplished by printing the ICORS diary cover page, and writing the information by hand on that cover sheet. This page is then to be kept in the project files.

If anyone other than the resident makes entries in the diary, they must type in their full name at the end of the day's entry.

The project diary is kept in the ICORS data base, but you must also print the new entries at least weekly. The printed diary pages are to be kept with the signed cover sheet in the project records. An acceptable alternative to this method is to save a snapshot file and store this data on a different CD other than where the contract data is backed up.

Weekly Reports (Example page F-4)

Weekly Reports must be generated every week for Completion Date projects and every week for Working Day contracts not in suspension.

Daily Quantities (Example page F-9)

Quantity documentation is kept on separate source documents (i.e. IDR's, field books, tickets, etc.), and the Daily Quantity (DQ) entry is used only as a means of making entries into the ICORS Quantity Book. The DQ is not a source document. DQ entries must be printed at least weekly and kept in the project records. An acceptable alternative to this method is to save a snapshot file and store this data on a different CD other than where the contract data is backed up.

Quantity Book (Example page F-10)

The Quantity Book is generated only by entries on DQ's. The Quantity Book, the Cover Sheet and the Scale Report must be printed at the end of the project.

Pay Estimates

ICORS Pay Estimates are submitted by e-mail unless the estimate includes a new material allowance. Be sure to check the test estimate prior to submitting the real pay estimate. Do not send the same estimate twice, and do not send consecutive pay estimates within less than five days.

Material Allowances

Material Allowances are generated in ICORS. For new material allowances or additions to existing material allowances, pay estimates must be sent by mail (not email). For these two cases, the hard copy of the estimate, BC-131, BC-49, and invoices must all be submitted together by mail. Subsequent estimates (material allowance decreases or stays the same) should be emailed with the BC-131 file included in the e-mail submittal.

Authorizations

Change authorizations are to be created in ICORS. A complete explanation of the reason for change is necessary for authorization approval. Use a separate attached sheet for this explanation if necessary.

Final Copies

When the project is complete, the following documents should be stored with the job records.

- 1. A compete hard copy of the Diary. The signed and initialed diary cover sheet must be stored with the complete Diary output.
- 2. A complete hard copy of the Quantity Book.
- 3. 2 CD copies of the contract data file.

ICORS Backups

In accordance with Departmental Order 8-2, 4.C.5, users of agency microcomputer systems (including laptops) are responsible for backing up data files stored on local microcomputer disk drive (e.g. C/ drive). The required frequency for backups to be done is any time data files have been appended, altered, modified or created. For personnel using ICORS, a backup must be made once a day any day data is entered into ICORS and a record of this backup must be kept on or with Form BC 2331, ICORS PC Backup Schedule. Detailed instructions are included with Form BC 2331.

PROJECT DIARY

The Project Diary is one of the most essential records kept on the job. The Resident or a designated representative is required to keep a daily diary on each contract.

The diary must be a bound hardback book, unless using ICORS or CMMS. There must be a separate diary for each contract. Journal type entries must start at the beginning of the diary book. All entries must be in order by date. (No wrap around entries will be allowed.) Preprinted dates may be modified. All entries throughout the dairy must be in ink.

The first entry in the diary must include the year, the name and signature of the Resident (and designated representative, if applicable), the complete official designation of the section, and the name of the Contractor. (Example page F-1) This may seem nonessential, but diaries have been thrown out of court because they were not properly identified.

The District's (or Local Agency's) return address must be noted on the title page so that it may be returned if it is ever lost.

A list of all personnel assigned to the job or who work on the job shall be entered in front of diary (print full name). Each person shall put his/her initials after his/her name.

An entry must be made in the project diary for each day of the project, including weekends and holidays, except when the project is officially suspended. Entries must begin by the official start date or when the Contractor begins work, whichever is first. (Example page F-2)

The diary need not repeat the detailed entries reported on the Inspectors' daily field inspection reports but should contain only general information about these operations. The diary should contain a day to day record of all significant items relating to the project. Since it may become important evidence in future claims or litigation it is essential that the diary be complete.

The diary shall not be used as a Quantity Book or field book; only a reference to the work in progress is sufficient.

A complete legible diary will be accepted in court if the need arises. Diary entries made by the Resident do not need to be signed or initialed. Only entries in a project diary made by someone other than the Resident or designated representative need to be signed by the person making that entry.

Information entered in the diary must never be erased, whited-out, or eradicated in any manner. To correct information already entered, cross out information to be changed. The information changed should be initialed and dated by the person making the change.

A partial list of items to be noted in a project diary is:

- 1. Weather project location specific (how the weather affects the controlling item of work).
- 2. Progress Schedule Controlling Item of Work and actual work done by Contractor's forces during the day.
- 3. Number of persons working. (The entries should contain enough information to supplement your required monitoring of DBE activities as per 49CFR 26.37(b) of the Code of Federal Regulations).
- 4. Working days charged (working day contracts), workable days charged (completion date contracts) and reason for partial or non-working/workable days.
- 5. Traffic control inspections and changes.
- 6. Important orders, discussions, or meetings with Contractor.
- 7. Official visitors and inspections.
- 8. Opening or closing detours, lane closures, changes in lane closures.
- 9. Work or materials rejected and reasons.
- 10. Time of shutting down or resuming of work and explanations.
- 11. Account of any time spent by Contractor's workers or equipment on disputable items of work.
- 12. The presence of railroad flaggers and whether the Contractor is to be reimbursed for their services.
- 13. Length and cause of any delay.
- 14. Arrival and departure of major equipment.
- 15. Record of important faxes and telephone calls.
- 16. Unusual conditions, if any, such as high water, bridge failures, slides, accidents/injuries, etc.
- 17. Approval for extra work, unless documented elsewhere, such as a prior approval authorization (BC 2256) or an RE memo attached to the authorization for the extra work pay item.
- 18. Field review with prime and affected subcontractor personnel to determine the timing and placement of erosion/sediment control measures per Construction Manual Section 280 for projects involving these measures.
- 19. Discussion regarding any specific safety related instruction given to field staff.

At the completion of the project, the diary shall be filed as part of the permanent job records.

THE QUANTITY BOOK

Instructions pertaining to contract quantities are found in Article 104.02 and Section 109 in the Standard Specifications and the Method of Measurement and Basis of Payment articles for each construction pay item.

For each contract you will be issued a Quantity Book in which contract items are to be posted. The Quantity Book is to be considered the keystone of the complete record keeping structure you will be building in the field. The daily quantities posted here will be referred to when each pay estimate is prepared. (Note: For projects using CMMS, the Quantity Book shall be electronic within CMMS.)

Title Page (Form BC 623) – Example page F-5. The title page in the Quantity Book shall either be filled in by a rubber stamp, typewriter or neatly printed in ink. For state-run projects, the "Address" at the bottom of the page refers to the District in which the project is located. For Local Agency projects (county, city etc.) the address should be that of the local agency.

Index of Sheets (Form BC 624) – Example page F-6. The computerized index is prepared in the same item-to-item order as the first pay estimate. If additional line items are later added to the contract, they can be added at the end of the index, under the appropriate fund type.

Quantity Record (Form BC 625) – Example page F-7. The job designation block and the upper lefthand side of Form BC 625 will be filled in by a computer run following project award. A separate filled in sheet will be provided for each pay estimate line item. These extra sheets will require the Resident to fill in by hand the complete job designation and quantity information. The lines provided for authorization additions and deductions are to be filled in as authorizations are submitted and approved. The final total quantity in the authorization box should be identical to the final measured and approved amount completed and accepted.

The column headed "Date" should be the dates the quantity was placed.

The "Station to Station, Location, or Description" shall describe the actual area where this item was placed.

Quantities placed are to be kept <u>daily</u> when this particular pay item is constructed. The column "To Date" shall show the accumulative total of this item as additional days of work are entered. This will facilitate the checking of material inspection reports and plan quantities for additions and deductions so that BC 22's may be kept current.

When the pay item is complete, the quantity shall be marked final after the last entry on the quantity book page.

"Evidence of Material Inspection" – An entry must be made in this column each time an entry is made in the quantity column. Evidence of material inspection, as described in the *Project Procedures Guide*, shall be such items as a State of Illinois stamp number, inspection report, plant report, or other information, written or verbal, to indicate that the material is satisfactory. When the information is verbal, it should be recorded in the Project Diary. The Resident should follow up any verbal approvals with written acceptance verification for his/her project files. The evidence of inspection required in the *Project Procedures Guide* should be strictly adhered to for both Progress and Final Documentation and must lead to a verifiable source of the information required. All delivery tickets shall be retained in the project files.

Also, the District's Certification of Materials, which is prepared when the project is finalized, can be expedited if the inspector would list under "Evidence of Material Inspection" such additional information as: the name of the plant, quarry or manufacturer of the material together with any identifying marks, imprints, or tags on the material. In any case, the name of the producer of the material must either be noted in this column, or cross-referenced in the project files. For example, if evidence of material inspection is noted only as "Approved Source & Tickets," then the producer's name must be noted on the delivery tickets. If the producer's name is not noted on the tickets, then it must be noted with the evidence of material inspection in the Quantity Book.

"Source of Progress Documentation" – Except for Lump Sum, Each, and Calendar Month items, each entry in the Quantity Book must be supported by either progress or final documentation. This column is to be used to cross reference to the source document. The Quantity Book is the start of the audit trial for all information required to support all progress and final payments for each item.

"Source of Documentation for Final Quantity" – Except for Each, Lump Sum, and Calendar Month items, this area must sufficiently identify the source documents which support the final quantity for this item. This area shall also be used to cross reference to other supporting documentation such as depth checks.

Inspection Reports (Form BC 625) – Example page F-8. On the opposite side of Form BC 625, within the block titled INSPECTION REPORTS, it is acceptable to record a statement such as "See MISTIC Form MIRC08, file" or directly log the quantity. Periodically, the quantities of materials shown on these MIRC08 printouts should be compared to the quantities actually used. The District Materials section should be contacted if insufficient quantity of inspected material is being assigned to your project.

For items in which a weight scale is used to determine the final quantity, the top of this page will be used to record the information on the scale decal placed by the *Department of Agriculture*. (See Documentation of Pay Quantities based on Weight Tickets)

FIELD INSPECTION REPORTS/SOURCE DOCUMENTATION

Each inspector is to provide a concise, accurate, daily account of the contractor's work so it may be recorded and furnished to the Resident at the end of each working day. This record is to be completed by the inspector actually doing the inspection for the Resident and filed in project records. This record may be documented using any of the appropriate documents listed under Final Documentation later in this section.

Source documentation is required for all quantities of work for which payment will be made. The source document shall contain all information necessary to identify the contractor or subcontractor performing the work, date work as completed, location of work, quantity of work completed and depth checks (if required). The document can also be used to record material inspection. The source document shall also contain initials and dates for all parties involved in inspecting and measuring the work and calculating and checking the quantity of work completed. This information may be documented using any of the appropriate documents listed under the Final Documentation later in this section.

When the BC 628 Inspector's Daily Report/IDR (Example page F-23) is used to document the work, the completed BC 628's shall be kept in chronological order and filed in a binder.

When a field book is used to document a pay item, all quantities for that particular pay item should be kept in consecutive pages in the field book, and the field book index kept up to date.

When a calculation file is used to document a pay item, all quantities for a particular pay item shall be kept in consecutive pages and filed, with pay item number and cross references clearly marked. In addition, if an individual document includes more than one (loose-leaf) page, then each page should indicate that it belongs to the same document. This could be indicated, for example, by noting such information as the date, IDR number or "page _ of _."

When weight tickets are used to document a pay item, all tickets pertaining to that pay item shall be kept separately from other project tickets (i.e. separate envelopes).

FIELD BOOKS

All field books that are to become part of the permanent job records will conform to the following:

- 1. The field books will be hard cover bound books.
- 2. The inside cover must show the complete project designation (job stamp) and the return address for the District (or local agency).
- 3. If more than one field book will be included in the projects records, the cover must also show identification (for example, F.B. #1) for cross-referencing purposes. The outside cover also should show the project designation.
- An index of pages must be completed for the final records. The index must contain enough detail to show the reviewer the contents and general location of the contents in the field book. (Example page F-11)

Use of a field book is required for:

- 1. Permanent survey records, layout records and cross-sections
- 2. Concrete Superstructure pour summary (Example page F-12)

Field Book required when not using forms:

- 3. PC Concrete paving summary (Example page F-13), or Form BC 2531 (Example page F-15, 16)
- 4. Hot-Mix Asphalt (HMA) paving summary (Example page F-14), or Form BC 2529 (Example page F-17,18)

QC/QA projects do not eliminate the documentation requirements above for PCC and HMA Paving. The use of field books for other types of records is optional.

INITIALS AND DATES

All documents will include the initials of the person (or persons) who performed each of the tasks involved in inspecting and documenting the work, as well as the date (or dates) each task was performed. "Inspected by" initials and dates are optional. "Measured by", "Calculated by" and "Checked by" are required. Initials and dates must be hand-written on all hard copy source documentation. Each person will initial his/her own work, except that when more than one person performs the same task, one of those persons may also record the initials of each of the other persons involved in that task.

Electronic initials and dates are allowed on electronic source documents in the Construction Materials Management System (CMMS).

When a document refers to another document, the referencing document does not need to repeat the initials and dates shown on the referenced document.

PLAN QUANTITY ACCEPTANCE, Example pages F-20-22

As stated in Article 109.02, payment to the Contractor will be made only for the actual quantities of work performed and accepted or materials furnished in accordance with the contract. Most final pay quantities will be based directly on measurements and calculations performed by the Resident in the field. However, for a number of pay items, the Method of Measurement specified in the contract documents allows the Department and the Contractor to agree in writing that the plan quantity is accurate and will be used for the final quantity; see Article 202.07(a).

This agreement is based on three points: (1) the plans accurately reflect the existing jobsite conditions, insofar as existing conditions will affect the final quantity of the agreed to items; (2) the plan quantity was accurately calculated; and (3) the work will be built to the lines, grades and dimensions shown on the plans, insofar as they pertain to the pay quantity of the agreed to items.

Form BC 981, Agreement on Accuracy of Plan Quantities is to be used for this agreement. This form lists most of the items in the Standard Specifications for which agreement to contract quantities is permitted. Extra spaces are available on the form for other items allowed by the contract documents. Form BC 981M may be used for metric contracts. In accordance with the Specifications, this agreement must be in writing for any given item before any work is started which would affect the measurements for that item.

The main purpose of the BC 981 is to save the Resident time in documenting the accuracy of the final quantity paid to the contractor. The BC 981 is an acknowledgement that for certain items, at least, it is possible to determine during the design phase accurate final pay quantities. The Regional Engineer's signature on the BC 981 indicates that the Regional Engineer is satisfied that with the quality controls in place in the district the quantities agreed to are accurate.

Even with these controls, however, errors are still possible, and the Specifications make two provisions for this. First, if the plans have been altered or some other development arises which calls into question the applicability of the plan quantity, either party has the right to request in writing and thereby cause the quantities involved to be measured.

Second, if an error has been discovered after the work has started, then that portion of the quantity which is affected by the error will be measured and the final quantity will be adjusted accordingly. In order for this provision to apply, however, the plans must distinguish where the individual quantities apply. This situation could arise, for example, if the plans indicate the quantity of trench backfill required for each run of storm sewer. If the layout for one of the runs is altered then the trench backfill would have to be measured for that run only, and the final quantity for trench backfill would be adjusted by the measured difference for that run.

For items agreed to, the source of documentation for final quantity noted in the Quantity Book will be "BC 981." If errors are found or changes are made to the plan quantity after the work has begun on an agreed item, adjustments to the plan quantity must be documented with appropriate measurements. The final pay quantity will then be the agreed plan quantity plus or minus the documented adjustment to the plan quantity. In this case, the source of documentation for final quantity noted in the Quantity Book is the BC 981, as well as the measurements and calculations used to document the adjustment to plan quantity.

Even though the BC 981 is signed in the office, the Resident is responsible for administering the agreement correctly. When the Resident cites the BC 981 as the source of documentation for the final quantity, the Resident is stating that the three points mentioned above have been satisfied. The BC 981 is merely an alternate means of documenting the accuracy of final pay quantities; it does not mean that the Resident can ignore the actual quantities of work performed.

As the work progresses on the agreed to items, the Resident should be aware of how the estimated progress quantities compare to the plan quantities. If the estimated payments are disproportionate to the Contractor's actual progress on the items, then the Resident should investigate the reason for the discrepancy.

For some of the items for which the Standard Specifications allow agreement to contract quantities, such agreement may not be appropriate in all situations. In general the following restrictions apply:

• Granular backfill, such as PGE, for undercuts must be measured by before and after cross sections. If the plan quantity for excavation includes undercut for PGE, then the excavation quantity may be agreed to only if the plans distinguish the undercut quantity from the rest of the excavation. In this case, the estimated undercut quantity should be noted on the BC 981, and it will be adjusted for the actual measured quantity.

- If the plans contain both earth and rock excavation, and they are contiguous, plan quantities cannot be accepted for the rock excavation unless the unit prices for earth and rock excavation are the same. Otherwise, it will be necessary for the actual quantity of rock excavation to be determined by before and after cross sections. Then, the previously agreed plan quantity of earth excavation will be adjusted by the measured difference in rock excavation. As with the undercut example above, the plan estimate for rock excavation should be noted on the BC 981.
- Plan quantity shall not be agreed to for any item for which the unit of measure is TON (M TON).

PROGRESS DOCUMENTATION

In order to properly document the quantities shown on partial payment estimates, progress entries in the Quantity Book are required. These daily quantities can be based upon either estimates or final measurements. In either case, progress documentation must be kept on file (preferably on the Inspector's Daily Report or in a field book) to indicate how the quantity was established. Make cross-reference notes in the Progress Documentation Source column of the Quantity Book.

The following guidelines can be used in establishing <u>estimated</u> quantities. Quantities that are estimated should be labeled as such. If a method other than one of those shown below is used to estimate a quantity, the method must be documented, clear and reasonable.

Excavation Pay Items – cubic yard (cubic meter) Example pages D-1, F-23, 24

- (1) Estimate percentages of plan balance quantities
- (2) Upgrade quantities as balance volumes are completed, or
- (3) Use load counts, when available. Use 80% of struck capacity.
- (4) Other.

Concrete Items – cubic yard (cubic meter) Example page F-26

(1) Extract the daily volumes from your Computation Check file

Or

- (2) Use a reasonable percentage (typically 90%) of actual delivered concrete.
- (3) Upgrade each completed structural item with the plan Bill-of-Materials quantity
- (4) Other.

Reinforcement Bars – pounds (kilograms) Example page F-26.

- (1) Establish a lbs/yd³ (kg./m³) factor from plan quantities; use it as concrete volumes are placed or as the bars are tied in place.
- (2) Upgrade each completed structural item with the plan Bill-of-Materials quantity
- (3) Other.

Pipe Pay Items – feet (meter) Example page F-27

- (1) Count and record pipe sections as installed.
- (2) Upgrade completed runs with plan quantities

Length and Area Pay Items – feet, sq. ft., and sq. yd. (meter and sq. meter)

- (1) Base computations on paced dimensions
- (2) Station to Station staked dimensions
- (3) Plan quantity schedules

Sodding - sq. yd. (sq. meter)

- (1) Pay 25% upon placement of sod
- (2) Pay 75% upon acceptance of sod
- (3) Refer to Article 252.12 and 252.13

Each and Lump Sum Items

If payment is to be made when the item is partially completed, record station or location, date and estimated percentage of completion in the Quantity Book.

For **Traffic Control** items, the following procedure is to be used to estimate progress payments (Example page F-28):

• Except for temporary bridge or traffic signals, when the traffic control devices required by the standard or special provision are installed, pay 25% of the lump sum (or each) bid price. On subsequent pay estimates, prorate 65% of the price, based on the actual vs. expected time of usage according to the progress schedule. When the devices have been removed the remaining 10% will be paid.

When it appears, (due to less than anticipated quantities of work performed), a negative adjustment to a traffic control pay item will be required per Article 701.20 (a) of the SSRBC, the Engineer shall make appropriate adjustments to the estimated progress payments noted above, in order to minimize the amount of overpayment to the contractor, until such time as final payment and required adjustments for the traffic control pay item are determined.

• For temporary traffic signals and temporary bridge signals, pay 60% after initial installation is complete and the signals are operating. The remaining 40% will be paid after the temporary signal installation has been completely removed.

Blasting Residue Containment Disposal

(Lump Sum) includes numerous contractor submittals, preliminary testing, specialized equipment, regulated disposal and extensive documentation, so the contractor is to be paid in accordance with the following schedule. However, the full amount should not be paid until all of the required disposal documentation has been submitted to the Engineer.

- Pay 30% on the first day of paint removal operations
- Prorate 50% as removal is completed
- Pay final 20% when all disposal documentation has been completed and the final testing is completed.

Topsoil Excavation and Placement (Example page F-29)

Since this pay item pertains to that material obtained from within the limits of the right of way and is measured in cubic yards (cubic meters) in its original position, for progress documentation purposes it may be necessary to pay 50% of the volume computed by method of average end areas in its original position upon completion of the excavation. The remaining 50% of the volume shall be paid after the placing and finishing of the topsoil to the lines, grades, and the minimum thickness shown on the plans.

ITEMS THAT MUST BE FINAL MEASURED

While payments for most items can be estimated under some circumstances (see Construction Manual Section 109), some types of work require that the final measurements be taken each day. Information needed to determine final quantities for such pay items must be obtained at the time the work is done as it will be difficult or impractical to compute quantities with the acceptable accuracy at a later date. Examples: removal items, piling, most weight ticket items, trench backfill, and similar items which, when covered, are impossible to measure later.

USE OF COMPUTERS FOR FINAL DOCUMENTATION (Example page F-30, 31)

The use of computers to determine final quantities is encouraged especially for excavation quantities, reinforcement bars and area items. If computer printouts are used to support pay item quantities paid, the following information is required for proper documentation:

- A. Compiled calculation programs verified and approved for use by the District.
 - 1. Pay item number and description, with contract number (or job stamp).
 - 2. Printout of the input data, initialed and dated by the person who checked the input;

- 3. Hard-copy of the results.
- B. Electronic spreadsheets
 - 1. Printout of the spreadsheet. The printout must show:
 - a. Pay item number and description, with contract number (or job stamp).
 - b. Input data
 - c. Description of how the results are calculated (e.g. sample formulas)
 - d. Calculation results, with page subtotals (if applicable)
 - e. Cross-references to any other referenced documents
 - 2. The hard-copy of the spreadsheet must be manually initialed and dated by:
 - a. The person who prepared the spreadsheet, and
 - b. The person who checked the spreadsheet printout or the person who checked the formulas embedded in the spreadsheet. (i.e. "Prepared by:" and either "Checked By" or "Formulas Checked By" initials and dates.)

In addition, if field measurements are entered directly in the spreadsheet, the printout must include "Measured By" initials and dates.

- C. Other programs, not verified and approved for use by the Department. Because the Department has no way of knowing the accuracy of other programs, the following general rules apply:
 - 1. A record of the original field measurements (if applicable) must be included in the project files.
 - 2. The measurements, or a computer-interpolated version of the measurements, must be in the same format as would normally be required if the measurement had been recorded manually (e.g. station, offset and elevation for cross-section data, or length and width for rectangular field measurements). In other words, the raw data must be in, or be put in, a format that could be understood by the reviewer;
 - 3. The program must be identified, including version numbers;
 - 4. Input data, if entered manually, must be checked;
 - 5. The preparer may be required to demonstrate that the results are correct. This may be accomplished by manually calculating a sample of the results, under the supervision of the Department.
 - 6. All other documentation requirements shall apply.

The documentation for each item shall be kept on file and marked with the item number for easy cross reference.

EXTRA WORK (ARTICLE 109.04)

Extra work will be paid for at either the contract price, a lump sum price or agreed unit prices, or on a force account basis. (See Construction <u>Memorandum No.9</u>, "Force Accounting Article 109.04" and Construction <u>Memorandum No. 4</u>, "Authorization of Contract Changes Articles 104.02 and 109.04")

Agreed Unit Price Items:

To establish a new unit price item will require a copy of the correspondence from the Contractor and an answering authorization from the Engineer. A memorandum from the District Estimator agreeing with the Contractor's proposed unit prices is also necessary. In order to expedite the review and processing of an AUP request by the District Estimator, if higher than typical bid prices for a given type of work effort are requested by the contractor, justification for the higher costs (confined work area, lower production rates, small quantities, limited availability of material, etc.) should be clearly documented in the contractor's request.

Force Account:

The Engineer must have copies of:

- (a) Proper authorization.
- (b) Daily copies of Form BC 635, Extra Work Daily Report, prepared by the Resident or Inspector, jointly signed with the contractor, recording labor, equipment, and material used. In limited cases, more than one day's work will be allowed on a BC 635, but only when the workers, equipment and time do not change from day to day.
- (c) Contractor's bill. The format should be in accordance with the sample bill shown in Construction Memorandum No. 9, Force Account Billing.
- (d) Balancing authorization.

MATERIAL ALLOWANCE

Example page F-32 & F-33. Payment may be made for materials such as fabricated structural steel on the basis of a material allowance if the Contractor requests payment for materials in storage. (See Article 109.07 of the Standard Specifications, and Construction Manual Section 109).

The pay estimate should be accompanied by Form BC 49, Materials Allowance Affidavit; Form BC 131, Statement of Material Allowances; and material supplier invoices and freight bills.

Within 60 days of payment to the Contractor we need copies of proof that the Contractor has paid for the material. Rubber stamp "Paid" will not do. In the event the Contractor does not provide the Resident with proof of payment (copy of cancelled check or copy of paid invoice signed and dated) for the material within 60 days of receipt of the payment, the dollar figure entered on the next pay estimate should be reduced by the value of the subject material. As a rule of thumb, the Resident may use a time limit of 70 days from the date the pay estimate was mailed, to account for processing time and time spent in the mail. See the Forms Section for specific instructions for preparing Forms BC 49 and BC 131.

MAXIMUM PAYMENT

Example page F-34, 35. Throughout the Specifications there are numerous references to pay items on which final payment cannot be made for more than __% of the amount specified by the Engineer. The following is a listing of Pay Items and the applicable percentages that limits maximum payment. (Generally, maximum payment percentages apply only to those Pay Items paid for on the basis of volume or weight.)

Items With "Maximum Pay" Percentages

NITROGEN FERT NUTR	POUND (KILOGRAM)	103%
PHOSPHORUS FERT NUTR	POUND (KILOGRAM)	103%
POTASSIUM FERT NUTR	POUND (KILOGRAM)	103%
AGG SHLDS (A or B)	TON (M TON)	108%
AGG SURF CSE (A or B)	TON (M TON)	108%
AGG BASE CSE (A or B)	TON (M TON)	108%
AGG BASE CSE REPAIR	TON (M TON)	108%
INCIDENTAL HMA SURFACING	TON (M TON)	103%
HMA BIND CSE	TON (M TON)	103%
HMA SURF CSE	TON (M TON)	103%
MIX FOR CR, JTS & FLGWYS	TON (M TON)	103%
LEVEL BIND (MACH & HAND)	TON (M TON)	103%
BIT MATLS (PRIME CT)	GAL or TON (LITER)	105%
BIT MATLS (TACK COAT)	POUND	105%
BIT MATLS (COVER & SEAL CTS)	GAL or TON (LITER)	105%
COVER COAT AGG	TON (M TON)	110%
SEAL COAT AGG	TON (M TON)	110%
GRANULAR EMBANKMENT SPECIAL	TON (M TON)	108%
POROUS GRANULAR EMBANKMENT	TON (M TON)	108%
AGRICULTURAL GROUND LIMESTONE	TON (M TON)	108%
SUBBASE GRANULAR MATL, TY (A, B, or C)	TON (M TON)	108%

Daily yield checks should be run on these items so that the Contractor can be notified when he/she is exceeding the maximum specified amounts of quantity. The limit of the final amount paid shall be plan quantity plus (or minus) theoretical quantities approved by authorization, multiplied by the above percentage.

YIELD CHECKS (Example page, F-14)

A yield check is a calculation to determine if the correct amount of material was used in the work:

Yield (%) = $\frac{\text{Quantity of material delivered}}{\text{Theoretical quantity required}} \times 100$

Frequent yield checks are a good engineering practice, and they may help uncover problems in the work early in the project. Yield checks documented by inspectors provide a timely and valuable source of information to the Resident.

While performing yield checks are highly recommended for all materials used in the work, they are required to be documented for the following items:

ltem	Frequency
HMA Paving	Frequently, each day of paving
PC Concrete Paving	At end of each day of paving

Also, many items include materials for which the contract specifies the application rate of the material. Ensuring the correct application of such a material is an important part of inspecting and approving the pay item work. The Resident's signature on the pay estimate assures the Department that the materials and procedures used were in accordance with the specifications for each pay item paid for on that estimate. Application rates are recommended, but not required, to be documented explicitly. However, there must be enough information in the project records that the application rate can be verified if the need arises.

THICKNESS DETERMINATION SCHEDULE (Example page, F-36)

In order to clarify the requirements for thickness determinations, we have compiled data from the *Project Procedures Guide*, the Standard Specifications and the Supplemental Specifications into an attached Thickness Determination Schedule. The Schedule refers to the specification article, the minimum frequency for making checks, the source documents for recording the thickness and the method of measurement. It should be pointed out that minimum checking may not be sufficient to verify plan thickness and should be increased as conditions dictate. There are many time-honored engineering methods for determining thickness; i.e., before and after rod and level shots, before and after stringline measurements, direct probe, and measurements of density holes. All are acceptable. **Blanket statements such as "all sidewalk was 4 inches (100mm) or deeper" and "all patches were 9 inches (225 mm)" are NOT acceptable. Actual measurements must be recorded. In addition, some items such as full-depth HMA and PCC pavement require that cores will be taken and measured by other than project personnel. This coring will be the responsibility of the Contractor, at locations determined by the Resident. (See Construction Manual Art. 407.10-4(b)).**

Thickness deficiencies identified by the Resident during construction should immediately be brought to the attention of the Contractor and corrective actions taken. Thickness deficiencies identified during coring will require adjusted prices or removal and replacement per the Standard Specifications. Large contract deductions or removals are the Department's last resort and are a source of embarrassment to both the Contractor and the Department. Special care must be exercised in urban, curbed areas where corrective actions are limited.

The schedule also includes miscellaneous items marked "All Others." This category covers many square foot and square yard (square meter) and foot (meter) items. Control and documentation of the depth of these items are also very important and should be handled in the same manner as all other items listed.

The location of where the thickness determinations were taken, along with the results, should be clearly noted on the source document. The location of the source document, whether it be field books or IDRs, must be clearly indexed and referenced through the Quantity Book. Many of the problems encountered in verifying thickness checks are in the locating and identifying them in the project records. Please have the source document properly cross-referenced.

Thickness determinations are a department policy requirement. The use of proper procedures for thickness determinations will significantly reduce the chances for unacceptable work.

TYPE OF CONSTRUCTION	SPEC. REFERENCE	MINIMUM FREQUENCY	DOCUMENT RECORD	METHOD OF MEAS.
BASE COURSES				
Agg Base Course PCC Base Course	351.06 420.15 &	1000 If (1 per 300 m)	F.B., IDR	<u>1</u> /
PCC Base Course	C.M. 43	250 lf (1 per 75 m)	F.B., IDR *	<u>1/, 2/</u>
Widening (under 6') HMA Base Course HMA Bse Cse Wid. Soil – Cement	354.09 355.09 356.07 352.17	1000 lf (1 per 300 m) 250 lf (1 per 75 m) 250 lf (1 per 75 m) 1000 lf (1 per 300 m)	F.B., IDR * F.B., IDR * F.B., IDR * F.B., IDR	<u>1/, 2/</u> <u>1/, 3/</u> <u>1/, 3/</u> <u>1</u> /
<u>SUBBASES</u>				
Subbase Gran Matl HMA Agg Mixture Cement Agg Mixture Pozzolanic Agg Mixture Cement Agg. Mixt. II	311.07 312.14 312.14 312.14 312.14 312.14	1000 If (1 per 300 m) 250 If (1 per 75 m)	F.B., IDR F.B., IDR F.B., IDR F.B., IDR F.B., IDR	<u>1</u> / <u>1/, 10/</u> <u>1/, 9/</u> <u>1/, 9/</u> <u>1/, 9/</u>
PAVEMENT & SURFACE COURSES				
Agg Surface Course PCC Pavement	402.06 420.15 &	1000 If (1 per 300 m)	F.B., IDR	<u>1</u> /
HMA Full Depth Pavement Removal	C.M. 43 407.10 440.07 & Suppl. Specs	250 If (1 per 75 m) 250 If (1 per 75 m) 1 per location or when thickness changes	F.B., IDR * F.B., IDR * F.B., IDR *	<u>1/, 4/</u> <u>1/, 5/</u> <u>1</u> /
SHOULDERS		-		
Agg Shoulders PCC Shoulders HMA Shoulders	481.06 483.07 482.06	1000 If (1 per 300 m) 250 If (1 per 75 m) 1000 If (1 per 300 m)	F.B., IDR F.B., IDR * F.B., IDR	<u>1/</u> <u>1/, 7/</u> <u>1/, 8/</u>

TYPE OF CONSTRUCTION	SPEC. REFERENCE	MINIMUM FREQUENCY	DOCUMENT RECORD	METHOD OF MEAS.
PATCHING				
HMA Patching PCC Patching	442.11 442.11	1 per patch 1 per patch	F.B., IDR F.B., IDR	<u>6</u> / <u>6</u> /
ALL OTHERS				
PCC Sidewalk	424.13	1000 sf (1 per 100 m²)	F.B., IDR	<u>1</u> /
PCC Slopewall	511.06	1000 sf (1 per 100 m²)	F.B., IDR	<u>1</u> /
PCC Median	606.15	1000 sf (1 per 100 m²)	F.B., IDR	<u>1</u> /
PCC Curb, Gutter, Combination Curb &				
Gutter	606.15	250 lf (1 per 75 m)	F.B., IDR	<u>1/, 11/</u>
PCC Paved Ditch	606.15	250 If (1 per 75 m)	F.B., IDR	<u>1</u> /
Top Soil	211.08	2500 SY(1 per 2090m ²)) F.B., IDR	<u>12/</u>
Lime Modified Soil	310.15	1500 ft. (1 per 450m)	F.B., IDR	<u>12/</u>
Thermoplastic Pvt. Mk	g.780.13	Once per size, per colo	r F.B., IDR	<u>1</u> /
Pay Items where a spe	ecific thickness is	required and the	F.B., IDR	

Method of measurement is not by volume or weight

Note: Thickness check shall include the entire typical cross section at the locations designated.

- * Cores required: In addition to making field thickness measurements, the District may cut cores and make independent measurements. The core results will be the basis for adjustment in unit prices for deficient pavement.
- 1/ Thickness determinations shall be documented by before and after cross sections or before and after measurements from an established reference elevation such as a stringline, form line or edge of pavement.
- 2/ Thickness determinations will be made during (in the plastic state) and after placement of the material and recorded at the frequency shown in this table. Thin base course, as determined by core measurements, will require an adjustment in the contract unit price as per Art. 420.15.
- <u>3/</u> Thickness determinations will be made during and after placement of the material and recorded at the frequency shown in this table. Thin base course, as determined by core measurements, will require an adjustment in the contract unit price as per Art. 420.15.

- <u>4/</u> Thickness determinations shall be made during (in the plastic state) and after placement of the material and recorded at the frequency shown in this table. Thin pavement, as determined by core measurements, will require an adjustment in the contract unit price as per Art. 420.15.
- 5/ Subgrade shall be checked after trimming from an established reference elevation such as stringline. All thickness checks shall be recorded at the frequency shown in this table. Thin pavement, as determined by core measurements, will require an adjustment in the contract unit price as per Art. 407.10.
- 6/ Thickness shall be determined by measurements from the existing edge of pavement or form line.
- 7/ Thickness determinations shall be made during (in the plastic state) and after placement of the material and recorded at the frequency shown in this table. Shoulder areas less than 90% of the plan nominal thickness shall be removed and replaced in accordance with Art. 483.07.
- 8/ Thickness determinations shall be made during and after placement of the material and recorded at the frequency shown in this table. Shoulder areas less than 90% of the plan nominal thickness shall be brought to the proper thickness by placing additional shoulder material or by complete removal and replacement of the deficient shoulder area. However, the final shoulder elevation shall not exceed the plan elevation or elevation established by the Engineer by more than 1/8 in. (3 mm).
- <u>9/</u> Thickness determinations shall be made during and after placement of the material and recorded at the frequency shown in this table. Subbase areas less than 90% of the plan nominal thickness shall be brought to the nominal thickness by increasing the thickness of the PCC pavement or by removal and replacement with new mixture. When continuously reinforced concrete pavement is to be constructed, correction shall be removal and replacement only. However, the surface elevation of the completed subbase shall not exceed the surface elevation of the completed subbase shall not exceed the surface elevation of the Engineer by more than 3/16 in (5 mm).
- <u>10/</u> Thickness determinations shall be made during and after placement of the material and recorded at the frequency shown in this table. Subbase areas less than 90% of the plan nominal thickness shall be brought to the nominal thickness by increasing the thickness of the PCC pavement, by placing additional bituminous aggregate mixture or by removal and replacement with new mixture. When continuously reinforced concrete pavement is to be constructed, correction shall be removal and replacement only. However, the surface elevation of the completed subbase shall not exceed the surface elevation shown on the plans or established by the Engineer by more than 3/16 in (5 mm).
- <u>11/</u> Thickness may be determined at the edge of pavement, back of curb, slipform template, or any other location at which the thickness of the item can be verified.
- <u>12/</u> Thickness determinations shall be documented by before and after cross sections or before and after measurements from an established reference elevation such as a stringline, form line or edge of pavement or by measuring the depth in a hole dug in the completed work, or when IBV's are conducted indicating the depth of acceptable subgrade improvement.

CROSS-SLOPE DETERMINATION REQUIREMENT FOR SIDEWALKS

(Example page F-36) In order to verify compliance with Americans with Disabilities Act (ADA) requirements, cross-slope checks on sidewalks are of utmost importance. Although it must be understood that it is essential to *verify* grade and slope measurements on all sidewalk and other pedestrian circulation paths, the following represents the <u>minimum</u> frequency required for *recording* cross-slope measurements. Similar to the *Thickness Determination Schedule*, **blanket statements such as "All sidewalk cross-slopes measured less than 2 percent" are not acceptable. Actual measurements must be recorded.** It should be pointed out that minimum checking as stated herein may not be sufficient to verify plan slopes. The frequency of checking and documenting cross-slopes should be increased as conditions dictate, and each district may require more stringent documentation requirements than represented here. Slope deficiencies identified by the Resident during construction should immediately be brought to the attention of the Contractor and corrective actions taken. The location of where the cross-slope determinations were taken, along with the results, should be clearly noted on the source document, or cross-referenced to another document. <u>Sidewalks shall have cross-slope determinations documented every 1000 sf, the same as the current thickness determination requirement frequency for sidewalk.</u>

DOCUMENTATION PROCEDURES FOR CONSTRUCTION ENGINEERING PERFORMED BY CONSULTANTS

Refer to Construction Memorandum 61 for detailed procedures regarding Consultant Construction Engineering Services.

REGULATED SUBSTANCES MONITORING

The '*Removal and Disposal of Regulated Substances (BDE*)' special provision, under 669.11, Basis of Payment, states 'Regulated substances monitoring, including completion of form BDE 2732 for each day of work, will be paid for at the contract unit price per calendar day, or fraction thereof to the nearest 0.5 calendar day, for REGULATED SUBSTANCES MONITORING.'

For documentation purposes, the guideline is as follows: If monitoring activities occur for 4 or more hours on a given calendar day, pay 1.0 CALENDAR DAY. If monitoring activities occur for less than 4 hours, pay 0.5 CALENDAR DAY. In no case should there be more than 1.0 calendar day paid on a given calendar day. In all cases, payment is also based on the receipt of Form BDE 2732, 'Regulated Substances Monitoring Daily Record'.

DOCUMENTATION OF PAY QUANTITIES BASED ON WEIGHT TICKETS

Pay quantities established based on truck weight tickets are not directly measured by Department representatives. For this reason, the following steps are taken to ensure that the quantities shown on the weight ticket are accurate:

- 1. The total weight of a truck cannot be obtained by adding separate axle weightings (see Obtaining Tare and Gross Weights of Trucks below).
- 2. The scale must be checked by the Department of Agriculture (DOA). In accordance with the DOA's Bureau of Weights and Measures Inspection Program, permanent scales are to be checked during each period of 12 months, which means that the scale is inspected at some time within each calendar year. Temporary scales are to checked at each setup. A check by a DOA-approved commercial scale company will be acceptable if the DOA is unable to provide a current inspection. The date on the decal, identification number on the decal and location of the scale shall be recorded in the Quantity Book. No payment is to be made for items measured on an unapproved scale.
- 3. A State representative should be at the scale to witness the weighing and initial the tickets. This requirement may be waived under certain conditions (see Daily Tare Weights, Automatic Ticket Printers, Weekly Independent Weight Checks, and Small Quantities).
- 4. Every effort should be made to personally collect and initial all delivery tickets for tonnage pay items, however, the inspector is only to initial those tickets that he/she personally collects. A memorandum should be written to the contract file explaining why the inspector was not present in the witnessing the delivery of the material. A daily yield check should be conducted to justify the total amount placed.

For certain materials, a correction factor is to be applied to the pay quantity shown on the tickets (see Aggregate Moisture Correction and Agricultural Ground Limestone Correction).

Obtaining Tare and Gross Weights of Trucks

All materials, which are paid for on the basis of truck weights, shall be weighed in accordance with the following procedure. Reference for this procedure is the Illinois Weights and Measures Act, which refers to the National Bureau of Standards Handbook 44.

"A vehicle or a coupled vehicle combination shall be commercially weighted on a vehicle scale only as a single draft. That is, the total weight of such a vehicle or combination shall not be determined by adding together the results obtained by separately and not simultaneously weighing each end of such vehicle or individual elements of such coupled combination. However:

- (a) the weight of a coupled combination may be determined by uncoupling the various elements (tractor, semitrailer, trailer), weighing each unit separately as a single draft, and adding together the results, or
- (b) the weight of a vehicle or coupled-vehicle combination may be determined by adding together the weights obtained while all individual elements are resting simultaneously on more than one scale platform."

Daily Tare Weights

(Example page F-37) To determine the pay weight of material delivered by truck, both gross and tare weights must be measured. Ordinarily, both measurements are to be witnessed by a representative of

the Department. Frequently, however, the contractors or suppliers loading operations make two separate weightings for each truck burdensome. For this reason, the Departments permits the tare weights of each truck to be measured a minimum of once each day, and the measured tare weight of each is then to be used for the remainder of the day.

When daily tare weights are used, the inspector is to witness and record the tare weights for each truck used in that day's supply operations. The inspector's record must identify each truck, the tare weight of the truck, and whether the driver was in the truck during the measurement. Form BC 1465, Report of Truck Tare Weights, is available for this use. (See Small Quantities)

Weight Checks

A weight check is a comparison of the net weight of material shown on the delivery ticket to the net weight measured on another scale. The purpose of a weight check is to give some assurance that the amount of material paid for, as shown on the delivery tickets, is the amount of material delivered to the job site.

For HMA tonnage items, contractors determine the shipping weight either by direct weighing or by using the nominal batch weights. The Standard Specifications require that scales used to measure HMA be equipped with automatic printers (Art. 1102.01(a)(7)). For batch plants the specifications also allow the use of the batch weights, instead of direct scale measurement, when surge or storage bins are not used (Art. 406.13(b)). There are three types of weight checks described in the following sections, one for weekly Independent Weight Checks, and two types (which should be alternated) for ticket weights determined from batch weights. All three types require reweighing the net weight of the material on the selected truck. The difference between them is the source of the weight for comparison with the independent scales.

QC Checks by Contractor

On HMA QC/QA contracts, the contractor is also required to perform scale checks and independent weight checks as part of the QC process. Scale checks performed by the contractor are for the purpose of ensuring the accuracy of the scale equipment. The procedures used by the contractor are the same as used by state representatives for performing the three types of weight checks described in the section above, except the contractor may use the approved platform scales at the plant site or a commercial scale approved by the Engineer. The plant scale must not be the scale used for the original measurement, but may be owned or controlled by the contractor or material supplier. QC checks performed by the contractor do not satisfy the requirement for independent weight checks to be performed by Department personnel.

Automatic Ticket Printers

Article 1102.01 (a)(7) defines an automatic ticket printer as follows:

"The automatic printer shall be an integral part of the scale equipment or the scale and printer shall be directly connected in a manner that will prohibit the manual entry of weights except as provided in a, below.

a. If the platform scale equipment measures gross weight (mass), the printer will record the gross weight (mass) as a minimum. Tare and net weights (masses) shall be shown on weight tickets and may be printed automatically or entered manually.

- b. If scale equipment on a platform scale zeros out the truck tare automatically, the printer shall record the net weight (mass) as a minimum.
- c. If the scale equipment on a surge bin weigh hopper zeros automatically after discharging each batch, the printer shall record the net weight (mass) as a minimum.
- d. If the scale equipment on surge bins automatically shuts down the feed system and weighs the amount in the silo before and after discharge, the printer shall record the net weight (mass) as a minimum."

For any weights recorded by an automatic ticket printer, no inspector will be required to witness the weighing and initial the ticket at the scale location. If tare weights or net weights are not automatically measured, then an inspector must still witness and record the tare weights (see Daily Tare Weights).

Weekly Independent Truck Weight Check/Action Report (Example pages F-38-40)

A weekly random check must be performed by a State (or Local Agency and QC) representative to verify the actual weight of material delivered. Independent weight checks are to be performed as follows:

- The check weights will be measured on an independent, approved platform scale other than the scale on which the original measurement is performed and not owned or controlled by the contractor or material supplier. The independent scale must be approved, and the DOA decal information is to be recorded on the <u>BIC 2367.</u>
- 2) Trucks are to be selected after leaving the plant, preferably at the paving location. Inspections should be unannounced and randomly scheduled. Under no circumstances should the inspector report to the plant and request a truck be loaded for an independent weight check.
- Gross and tare weights must be measured and recorded, so that the actual net weight of material can be determined. Ensure the independent scale has been zeroed prior to determining both the gross and tare weights.
- 4) The independently measured net weight must agree with the weight shown on the tickets within a tolerance of 0.50 percent (HMA) 0.70 percent (aggregate):

Tolerance (%) = (delivery ticket net wt – weight check net wt) x 100 / (weight check net wt)

- 5) The RE and the contractor shall be provided a copy of the <u>BIC 2367</u>. The information shall also be reported to the District Office which will in turn inform any other RE being supplied from the same producer. The independent weight check results are to be recorded and placed in the job file available for inspection, with corrective action taken for deviations from tolerance noted.
- 6) If the independent weight check results are not within tolerance, at the contractor's request, the empty vehicle may be re-weighed on a second independent approved scale. The three empty weights will be analyzed to determine the validity of the independent weight check.
- 7) Independent weight checks must be performed at least once per week per scale (this includes any scale and batch weights) when any item is placed for which payment is based on weight tickets. If the same scale is used for several contracts during the week, a weight check performed for any one of the contracts will be sufficient for all of the contracts, as long as a copy of the check is included in the records for each of the projects. (See Small Quantities)

8) The contractor must respond to the Engineer, in writing, within 7 calendar days as to the cause and correction of the deficient scale.

Note:

- a) The DOA performs maintenance checks of scales that have current decals. If the scale is out of tolerance a red tag is used and the scale is not usable. The scale cannot be used during the time it has a red tag.
- b) The Bureau of Investigations and Compliance (BIC) is conducting random independent weight checks utilizing statewide independent scales. When an independent weight check is performed by BIC, the Resident can utilize the weight check to satisfy the weekly independent weight check requirement outlined above.

(See Article 109.01 for additional instructions)

Documentation for Payment of Hot-Mix Asphalt Based on Batch Weights

The Specifications provide for measurement of the mixtures by either weighing the mixtures on approved platform scales or on the basis of plant batch weights. When measured on the basis of plant batch weights, occasional checks shall be made by weighing full truckloads of the mixture on the approved platform scale at the plant site, or on a commercial scale approved by the Engineer. This check serves two purposes:

- (a) To check the accuracy of the scales, either batch, surge bin or the platform scales; or
- (b) The accuracy of batching the mixture

The frequency of check weighing should be a minimum of one per week; however, when the plant is in continuous daily operation, the frequency preferably should be one per day.

The accuracy of the scales should be checked by observing the actual scale weight of the batches produced and comparing the total with the net weight of a truck load from the platform scale. Variations between these weights of more than 0.5 percent would indicate the batch scales or the platform scales should be checked by the Illinois Department of Agriculture.

Scale Accuracy Check (0.5% Tolerance)

1. Tare a truck on an approved platform scale	15000lbs
2. As you observe the scale dial stopping on or near the preset scale face marker, record the <u>actual</u> accumulative aggregate weight. Add in the mineral filler and paving asphalt weights.	3,979.0 3,951.0 4,149.0 3,960.0 <u>4,101.0</u>
	24,289 lbs.

3. Gross the truck on the platform scale. 39,

39,401 lbs.

```
Tolerance, 0.5\% = \frac{\text{net wt.}(3-1) - \text{summation of weighed batches}}{\text{net wt.}(3-1)} x100
= \frac{24,401 - 24,289}{24,401} x100
= 0.46% O.K.
```

The accuracy of batching the mixture should be randomly checked with the batch weights compared to the platform scales. The results, with an allowance for accuracy in weighing, should be checked within 0.5 percent of the gross load on the platform scale. If batch weights vary more than 0.5 percent, the batch scales should be recalibrated.

Batching Accuracy Check (0.5% Tolerance)

1. On an approved platform scale weigh a random truck after it has been loaded.	37,840.0 lbs.
2. Empty it on the job.	
3. Tare the returning truck on the platform scale.	14,191.0 lbs.
Actual net weight =	23,649.0 lbs.
4. Record the load ticket	24,000.0 lbs.

Tolerance, $0.5\% = \frac{\text{load ticket (4)-actual net weight (1-3)}}{\text{actual net weight}} x100$

 $=\frac{24,000-23,649}{23,649}x100 = 1.48\%$ Re check and/or recalibrate

The Specifications also require the batch scales to be calibrated at the beginning of each construction season and at other times as deemed necessary by the Engineer. The accuracy certification will be by the Department of Agriculture.

The calibration and check weighing results are to be recorded and placed in the job file available for inspection with corrective action taken for deviations from tolerance noted.

Each of the above checks can be run on alternate occasions. Report these accuracy checks on Form MI 305, Bituminous Daily Plant Output, Independent Weight Check Form <u>BIC 2367</u>, or other methods using the above format. Results shall be placed in the job file.

Aggregate Moisture Correction (Example page, F-41)

To correct the scale weight of Type A aggregate items, where a moisture deduction is applicable (see Art. 311.08(b)), the following formulas shall be used.

(a) actual moisture = $\frac{(\text{wet weight of sample}) - (dry \text{ weight of sample})}{(dry \text{ weight of sample})}$

(b) pay weight = $\frac{(\text{scale weight})x(1+\text{allowable moisture})}{(1+\text{actual moisture})}$

Note: Actual moisture content test results shall be rounded to the nearest 0.1% in accordance with the Manual of Test Procedures for Materials.

Agricultural Ground Limestone Correction

(Example page F-42) In accordance with Article 250.09, the pay weight for this item is to be adjusted using a source correction factor for the source of the agricultural limestone. This correction factor is stored in the MISTIC system, and is available upon request from the district Materials Engineer.

The adjusted pay weight is to be calculated as follows:

Adj. pay weight = (ticket weight) / (4 year source correction factor)

Small Quantities

Witnessing the weighing and initialing of weight tickets at the scale site for materials paid on the basis of weight tickets should have a high priority. However, due to logistics between sources and jobsites, small quantities may be accepted providing the receiving inspector is satisfied that prior to accepting the material the weight appears satisfactory. Under these conditions, the Resident is permitted to waive the following inspection requirements for items whose pay quantity is determined by scale measurements.

- 1. No inspector will be required to be present at the scale to witness the weighing and initial the tickets.
- 2. No inspector will be required to witness and record tare weights for that day (if otherwise applicable).
- 3. No independent weight checks (if otherwise applicable) will be required as a result of that day's delivery of material.
- 4. No moisture determination will be required (if otherwise applicable) for that day.

Limits on accepting the Contractor's or Supplier's weight tickets in accordance with this section are as follows:

- Aggregate Not to exceed 500 tons (500 m ton) per day
- Hot-Mix Asphalt Mixtures for roadways should not exceed 250 tons (250 m ton) per day.
- Bituminous materials Not to exceed 4000 lbs (1800 kg) per day.
- Other materials consistent with this section.

Unlimited quantities for the following items:

- Fertilizer Nutrients
- Calcium Chloride
- Hydrated lime for lime stabilized soil
- Agriculture ground limestone

Individual Load Ticket Waiver For Recycled Aggregates Paid On Square Yard or Cubic Yard Basis

When recycled PCC or bituminous concrete is allowed for use in lieu of virgin aggregate for a square yard or cubic yard pay item (i.e. Agg. Subgrade 12) and the material is crushed/milled, graded and properly tested, the requirement for individual load tickets can be waived. Instead, the contractor can provide a daily tabulation of each truck used to provide this material. This tabulation will contain, at a minimum, the truck number, struck capacity (volume calculation), number of loads delivered for each vehicle and the total calculated volume for the day. Eighty percent of this calculated volume can then be used for yield check determinations.

Progress documentation quantities should also use 80% of the daily volume determined above for estimating cubic yard items. Station to station length times the average width calculations can be used for estimating square yard items. Depth check measurements and documentation are still required. Final documentation of the quantity will consist of field measurements and calculations or Agreement on Accuracy of Plan Quantities using Form BC 981. Verbal approval by the Bureau of Materials, properly documented in the Resident's diary and quantity book, is evidence of material inspection for progress payments. Final Evidence of Material Inspection should be noted in the quantity book as "Material and gradation approved by Bureau of Materials". Copies of the gradation testing data must be in the Resident's final job records.

FINAL DOCUMENTATION

The final quantity for all items appearing in the Quantity Book must be cross-referenced to one of the following which will serve as documentation and which will show measurements and calculations used in determining the final quantity.

Note: Calendar Month, Calendar Day, Each and Lump Sum items entered directly into the Quantity Book will not require a cross reference but these items will require a cross-reference if documented on a source document other than the Quantity Book.

- (a) Field measurement books. (hardback only)
- (b) Inspector's Daily Report, BC 628, if identified as a "final field measurement."
- (c) Cross-section paper for cross sections only.
- (d) Weight tickets bound and summarized by means of an adding machine tape or spreadsheet. Example page F-41.
- (e) Project diary for calendar month or calendar day items.
- (f) Calculation file for such items as concrete structures and reinforcement bars.
- (g) Agreement on Accuracy of Plan Quantity, BC 981.
- (h) Force account file with Extra Work Daily Report, BC 635, and contractor's invoice.
- (i) Weekly Trainee Report, SBE 1014, file with signed reports for Trainees.
- (j) Built According to Standard #____.
- (k) Computer printout/spreadsheet.
- (I) Traffic Control Surveillance Report, BC 2240.

The cross-referenced note for final measurements and calculations shall be placed at the bottom of the Quantity Book page, Form BC 625, and should be made only to the document(s) containing the information used in obtaining the final quantity. On items requiring depth checks, the final source of

documentation in the quantity book shall include a reference to the depth check documentation location, if that information is located in a different location (Example page, F-7).

All calculations made to determine final pay quantities must be checked by someone other than the preparer. (See Section D for Recommended Checking Procedures)

All documents in the project files must be identified with the project designation (contract number or job stamp), except that documents identified above (Quantity Book, project diary and field books) and any document circulated outside the field office must contain the complete project designation (job stamp).

In addition, if an individual document includes more than one (loose leaf) page, then each page should indicate that it belongs to the same document. This could be indicated, for example, by noting such information as the date, IDR number or "page ____ of ____."

Section B

FINAL DOCUMENTATION REQUIREMENTS BY PAY UNIT

The following is a general breakdown of most pay units showing the degree of accuracy for measuring each and information required for documenting each. It is acceptable to leave final quantities to the same accuracy as the daily quantities.

PAY UNIT	ACCURACY OF MEASUREMENT	REQUIRED DOCUMENTATION
Acre (Hectare) <i>Seeding</i>	1. Summation of final quantity to nearest 0.1 acre (0.1 hectare).	 Field measurements used to calculate the final quantity
page F-43		Area (acre) = $\frac{L(ft) \times W(ft)}{43,560}$
<i>Tree Removal (acres) refer to Art. 201.10(b)(2)</i>		Area (ha) = $\frac{L(m) \times W(m)}{10,000}$, or
		2. Form BC 981 (where applicable).
Calendar Day Traffic Control Surveillance page F-44	1. Daily or fraction thereof, to the nearest 0.01 CAL DAY.	 Monthly entries in the Quantity Book cross referenced to daily, summarized BC 2240's, Traffic Control Surveillance Reports, or
		2. Other source documents.
Calendar Month	1. Monthly or fraction thereof.	1. Project Diary entry, Quantity Book entry,
Engr. Field Office page F-2	 Summation of final quantity to nearest 0.5 month. 	or other source document on the date the office or lab is ready for use, and the date the Contractor was notified the office or lab would no longer be needed, and
		2. Monthly entries in the Quantity Book.
Cubic Yard (Cubic Meter) Structure Ex. page F-45	 Final quantity of concrete measured to nearest 0.1 cubic yard (0.1 cubic meter)*. All other items measured to the 	 Field measurements used to calculate the final quantity or the statement "built to plan dimensions" when they are used to calculate the final quantity, and
Trench Backfill	nearest 0.1 cubic yard (0.1 cubic	2. Calculations. Or
page F-46 P.G.E. Note on page F-25	meter) daily and the final quantity summarized to the nearest cubic yard (cubic meter)*.	 "Built according to Standard"; "Built according to plan detail sheet" statements. Or
Conc. Struct.		 Form BC 981 (where applicable) with calculations for daily estimates
Page F-47, 48 Conc. Outlet page F-49	 Note: Individual dimensions shall be measured at least to the nearest 0.1 ft (0.03m) 	5. Depth checks (where applicable).
Each / Lump Sum	1. Each	1. Recorded by Station or location and
Surf. Var's. F-50 Traf Cont Price Adj F-52, 53		date in the Quantity Book 2. Calculations required for any adjustments.

PAY UNIT	ACCURACY OF MEASUREMENT	REQUIRED DOCUMENTATION
Foot (Meter) Elec. Cables page F-54, 55 Pipe Culvert page F-56 Piling	 Each run measured to the nearest 0.1 ft. (0.1 m). (English) Summation of final quantity to the nearest foot. (Metric) Leave final quantity to nearest 0.1 meter. 	 Field Measurements. Depth checks (where applicable)
page F-57-60 Gallon (Liter) Prime Coat page F-61 (on adding machine tape)	1. Summation of final quantity to nearest gallon (liter).	 Calculations based upon initialed weight tickets and Specific Gravity per gallon (liter). The Specific Gravity is given on the shipping or storage ticket. Vol (gallon) = net wt. (lbs)/(8.328 x Sp. Gr.
		Vol (liter) = $\frac{\text{net wt. (kg)}}{\text{Sp. Gr.}}$ 2. Record of the D.O.A. decal date, I.D. number, and scale location.
Hour Trainees page F-62	1. Hourly	 Monthly entries in the Quantity Book cross referenced to summarized, weekly prepared SBE 1014's.
Pound (Kilogram) <i>Rebar</i> <i>page F-31, 47</i>	 Summation of final quantity to nearest pound (kilogram). 	 Calculations based on the Bill-of- Materials. Use the weight table shown in Art. 508.10, or
Str. Steel page F-63		 "Built according to Standard"; "Built according to plan detail sheet" statements, or
Fertilizer page F-64		 Weight tickets or bag counts, accompanied by conversion calculations (Fertilizer Nutrients), or
Prime (Tack) Coat		4. Form BC 981 (where applicable)
page F-71, 72		 For prime (tack) coat paid by the pound, the "Required Documentation" under the Ton Pay Unit shall apply where applicable.

PAY UNIT	AY UNIT ACCURACY OF MEASUREMENT RE		REQUIRED DOCUMENTATION	
Square Foot or Square Yard (Square Meter) PCC Sidewalk		Individual areas measured to the nearest 0.1 sq. ft. or 0.1 sq. yd. (0.1 sq. meter) *	1.	Field measurements and calculations used to calculate the final quantity or the statement, "built according to plan detail sheet ",, or
page F-36	2.	Summation of final quantity to nearest sq. ft. or sq. yd.(square	2	Form BC 981 (where applicable), and
Patching		meter).	3.	
page <mark>F-65</mark>			-	For sidewalk, cross-slope verification in
Base Cse Wid page <mark>F-66</mark>	*	Note: Individual dimensions shall be measured at least to the nearest 0.1 ft (0.03m)		order to comply with ADA requirements.
Slopewall page <mark>F-6</mark> 7				
Ton	1.	Nearest 0.1 tons daily.	1.	Weight tickets showing the material,
(Metric Ton) Aggr Gr Limestone page F-42 Aggr Base Cse page F-41 HMA SC Page F-34, 17, 18	2.		 2. 3. 4. 5. 6. 7. 	date and weight, and

PAY UNIT	ACCURACY OF MEASUREMENT	REQUIRED DOCUMENTATION
Unit 1000 gal. (1000 liters or 5000 liters) Suppl. Water page F-68	 Nearest 0.1 daily. Summation of final quantity to nearest unit. 	1. Meter tickets or 2. Weight tickets and calculations $Vol(gallon) = \frac{net wt. (lbs)}{8.328 \times Sp. Gr.}$ $Vol(liter) = \frac{net wt. (kg)}{Sp. Gr.}$ (Sp. Gr. for water = 1.0) or
		 Volume measurements of conveyance and calculations or Record manufacturer rated capacity of truck tank when full loads are used.
Unit 100 ft.(30 m)	 Nearest 0.1 daily. Summation of final quantity to nearest unit. 	 Field measurements. Measure each side separately for Excavating and Grading Existing Shoulders. Record by Station (left or right) or location. Calculations.
Unit 100 plants or 100 seedlings Seedlings page F-69	 Perennial plants to the nearest 0.05 daily; Seedlings to the nearest 0.1 daily. Summation of final quantity to nearest unit. 	 Record by Station (left or right) or location. Calculations.
Unit Diameter <i>Tree Removal</i> <i>page F-70</i>	1. Summation of final quantity to nearest unit diameter.	1. If a tree tape was used, make a note of this with your field measurements. If a tree tape was not used, the actual field measurements must be shown along with calculations for the appropriate Unit Diameter. Unit Dia. = <u>circumference (in.)</u> (English) Π Unit Dia. = <u>circumference (mm)</u> (metric) 25 Π (Note: Art. 201.10 defines Π = 3.1416) and 2. Calculations.

Section C

(Updated to 2020 Project Procedures Guide, Attachment 3)

FINAL DOCUMENTATION REQUIREMENTS BY PAY ITEM

For payment of work, two key pieces of information are needed: 1) Documentation of the quantity of work performed and 2) Evidence of material inspection. This section provides a synopsis of the type of records, measurements and calculations needed to document the work performed and required evidence of materials inspection needed to insure the materials provided meet contract requirements. Evidence of Materials Inspection categories and abbreviations are listed below.

• BBS 59 (BB59) – This Department form is a report of acceptance of fabrication of structural steel. The Bureau of Bridges and Structures usually performs this type of inspection and testing.

• BILL OF LADING (BOL) - A shipping ticket that accompanies a product to the job site and which identifies the product, source, and lot.

• CBM (CBM) - Bureau of Materials approval letter specific to a batch/lot/heat, etc. for a specific contract or producer/supplier.

• CERTIFICATION (CERT) - Manufacturer's written certification that indicates material complies with the specifications or contract. Supplier certifications are not acceptable.

• DAILY PLANT REPORTS (DPR) – For HMA, reports generated that provide mixture test results and other production data. For non-QMP projects, Daily Plant Reports are the responsibility of the Inspector. For QMP projects, refer to the appropriate special provisions to determine responsibility for Daily Plant Reports. For example, for QC/QA for PCC, the Daily Plant Report is often only the form BMPR MI504 completed by the Producer, Contractor, etc. for aggregate gradations.

• ILL OK STAMP (ILOK) – Material is stamped by an IDOT Inspector with an "ILL OK" stamp indicating prior inspection and acceptance. An inspection tag may be used as Evidence of Materials Inspection and approval. A Resident Engineer must make note of the stamp or collect the inspection tag to ensure proper documentation of material inspection.

• LA-15 (LA15) – This Department form is a supplier's certification indicating material is from approved stock. The form is sometimes used as a Bill of Lading to indicate prior approval. The form should include supplier, proper contract/job designation, material description, manufacturer, specific approved material (test ID number, lots, or batches), and quantity. Additional information on LA-15's is provided in Attachment 1.

• MARK (MARK) – A commercial label, tag, or other marking which indicates product specification compliance and/or an approved source/manufacturer. A Resident Engineer must make note of the label, tag, or other marking to ensure proper documentation of material inspection.

• NONE – No evidence of material inspection is required. Typical of where work item requires material to be removed from the project or material is naturally in place on the project prior to the contract.

• QUALIFIED PRODUCT/PRODUCER LIST (LIST) – The material appears on a current list of Department-approved products or approved sources found at the Department's web site, IDOT Website, under "Doing Business/Material Approvals." Contact the inspecting district's Materials Office for information on aggregates.

• TEST (TEST) - Approved test result available via the MISTIC system or from locally performed lab or field tests (e.g., soil density).

• TICKET (TICK) - A ticket from an approved source indicating Department material or aggregate gradation, job designation, purchaser, and weight (if applicable).

• VISUAL ACCEPTANCE (VIS) – A RE memo denoting visual inspection is required in the project file, and input into MISTIC is required. A Resident Engineer must make note of the visual acceptance to ensure proper documentation of material inspection.

• VISUAL EXAMINATION (VISE) – Same as VIS, but no RE memo or input into MISTIC is required. A Resident Engineer must make note of the visual examination to ensure proper documentation of material inspection. C-1

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
201	Tree Removal	Unit	1. Field measurements.		None
	Tree Removal Special		 Sta. to Sta. groupings listing individual measurements. 		
			3. Tree tape or computations.		
			If a tree tape is used, it must be indicated.		
201	Tree Removal	Acre	1. Form BC 981 or		None
		HA	2. Calculations based on the horizontal area within the limits specified on the plans or by the Engineer.		
201	Temporary Fence	Foot Meter			VISE
201	Fertilizer Nutrients	LB Kg	See requirements for these items listed under Section 252 and additional information on page C-5 of this section.		CERT (bulk) or MARK (bags)
201	Supplemental Watering	Unit	See requirements for this item listed under Section 252.		Potable source
202	Earth Excavation	CY Cu M	1. Form BC 981 or Before & after cross-sections & calcs.	39	None

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
202	Rock Excavation	CY Cu M	1. Before & after cross-sections & calcs or	39	None
			 When the unit prices of Rock Excavation & Earth Excavation are identical, authorized approval can be obtained for a Plan Quantity Agreement for both, Form BC 981. 		
202	Earth Excavation Widening	CY Cu M	1. Before & after in-place measurements & calcs	39	None
			Width & depth not to exceed plan dimensions.		
203	Channel Excavation	CY	1. Form BC 981 or	39	None
		Cu M	2. Before & after cross-sections & calcs.		
203	Rock Excavation in Channel	CY	1. Form BC 981 or		None
		Cu M	2. Before & after cross-sections & calcs.		
204	Borrow Excavation	CY Cu M	1. Before & after cross-sections & calcs.	39	Soil from outside ROW: Letter of approval from District Materials Engineer
204	Furnished Excavation	CY Cu M	 Furn. Exc. = [Emb - Suitable Exc. (1 - SF)], where SF = 0.25 shrinkage factor unless otherwise shown in the plans 	39	Soil from outside ROW: Letter of approval from District Materials Engineer
			2. See Section 200 of Const. Manual		

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
206	Granular Embankment Special	Ton	1. Wt. tickets with moisture correction.		Approved source & Shipment ticket
		M Ton	2. 108% maximum pay.		or
			 Department of Agriculture scale decal information. 		LIST + TICK
206	Granular Embankment Special	CY	1. Form BC 981 or		Approved source & Shipment ticket
		Cu M	 Before & after in-place measurements & calcs. 		or
			Width and depth not to exceed plan dimensions.		LIST + TICK
207	Porous Granular Embankment	Ton	1. Wt. tickets with moisture correction.	39	Approved source & Shipment ticket
		M Ton	2. 108% maximum pay.		or
			3. Department of Agriculture scale decal information.		LIST + TICK
207	Porous Granular Embankment	CY	1. Before & after cross-sections & calcs.	39	Approved source & Shipment ticket
		Cu M			or
					LIST + TICK
208	Trench Backfill	CY	1. Form BC 981 or		Approved source & Shipment ticket
		Cu M	2. Trench measurements & calcs.		or
			Dimensions used in calcs shall not exceed maximum allowable. See Art. 550.04 of the Std. Specs for maximum trench width, or		LIST + TICK
			 Trench measurements & calcs using the Standard Tables. (for concrete pipe, only) 		

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
209	Porous Granular Backfill	CY	1. Trench measurements & calcs.		Approved source & Shipment ticket
		Cu M	Dimensions used in calcs shall not exceed maximum allowable. See Art. 550.04 of the		or
			Std. Specs for maximum trench width, or2. Trench measurements & calcs using the Standard Tables. (for concrete pipe, only)		LIST + TICK
210	Geotechnical Fabric for Ground Stabilization	SY Sq M	 In-place measurement for calcs. (Do not pay for overlapping fabric) 		CERT or LA15
211	Topsoil Furnish & Place	SY	1. Form BC 981 or		TEST
	&	Sq M	 Surface measurements of all authorized areas, and calculations. 		
211	Compost Furnish & Place		3. Depth checks.		CERT
213	Exploration Trench	Foot	1. In-place measurements of the open trench.		None
		Meter	2. Depth checks.		
250	Seeding	Acre	1. Form BC 981 or		CERT
	& Interseeding	HA	Slope measurements of the surface area seeded and calculations.		or ILOK
					or LA15

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
201	Nitrogen Fertilizer Nutrient	LB	1. Wt. tickets or bag counts with computations.		CERT (bulk) or MARK (bags)
250	&	Kg	LB = Total lbs X % of nutrient		
252	Phosphorus Fertilizer Nutrient &		The scale & job site inspectors' initials must be on tickets.		
	Potassium Fertilizer Nutrient		2. 103% maximum pay.		
			3. DOA scale info (if weight tickets used)		
250	Agricultural Ground Limestone	Ton	1. Weight tickets		Approved source & Shipment ticket
252		M Ton	 Calculations showing that the pay quantity has been corrected using the 4-year source correction factor. 		or
			3. 108% maximum pay.		LIST + TICK
			4. Dept. of Agriculture scale decal information.		
311	Subbase Granular Material	Ton M Ton	 Wt. tickets with moisture correction, if required. 		Approved source & Shipment ticket
			2. 108% maximum pay.		or
			3. Dept. of Agriculture scale decal information.		LIST + TICK
311	Subbase Granular Material	CY	1. Form BC 981 or		Approved source & Shipment ticket
		Cu M	2. In-place surface measurements and calcs.		or
			Width and depth not to exceed plan dimensions.		LIST + TICK

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
311	Subbase Granular Material	SY	1. Form BC 981 or		Approved source & Shipment ticket
		Sq M	2. In-place surface measurements and calcs.		or
			Width not to exceed plan dimensions.		
			3. Depth checks.		LIST + TICK
312	Stabilized Subbase	SY	1. Form BC 981 or		HMA: DPR + TICK + TEST
		Sq M	2. In-place surface measurements and calcs.		CAM II: DPR + TICK + TEST
			Width not to exceed plan dimensions.		CAM & PSM: TEST
			3. Depth checks.		
351	Aggregate Base Course	Ton M Ton	 Weight tickets with moisture correction, if required. 		Approved source & Shipment ticket
			2. 108% maximum pay		or
			3. Dept. of Agriculture scale decal information.		LIST + TICK
351	Aggregate Base Course	CY	1. Form BC 981 or		Approved source & Shipment ticket
		Cu M	2. In-place measurements and calculations.		or
			Width & depth not to exceed plan dimensions.		LIST + TICK
351	Aggregate Base Course	SY	1. Form BC 981 or		Approved source & Shipment ticket
		Sq M	2. In-place surface measurements and calcs.		or
			Width not to exceed plan dimensions.		LIST + TICK
			3. Depth checks.		

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
352	Processing Soil Cement Base	SY	1. Form BC 981 or		TEST
	Course	Sq M	2. In-place surface measurements and calcs.		
			Width not to exceed plan dimensions.		
			3. Depth checks.		
352	Cement	LB	1. Wt. tickets of bag counts and calculations.		(LIST or TEST) + BOL
		Kg	2. 105% maximum pay.		
			 Dept. of Agriculture scale decal information. (if wt. ticket used) 		
353	PCC Base Course	SY	1. Form BC 981 or		DPR + TICK + TEST
	&	Sq M	2. In-place surface measurements and calcs.		
354	PCC Base Course Widening		Width not to even a plan dimensions		
355	& HMA Course Widening		Width not to exceed plan dimensions.		
	&		3. Depth checks.		
356	HMA Base Course Widening				
358	Preparation of Base	SY	1. Form BC 981 or		None
		Sq M	2. Measurements of affected areas and calcs.		
358	Aggregate Base Repair	Ton	1. Wt. tickets with moisture correction.		Approved source & Shipment ticke
		M Ton	2. 108% maxium pay.		or
			3. Dept. of Agriculture scale decal information.		LIST + TICK

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
402	Aggregate Surface Course	Ton M Ton	 Wt. tickets with moisture correction, if required. 		Approved source & Shipment ticket
			May be stockpiled ONLY when used for Temporary Access (Art. 402.10)		or
			2. 108% maxium pay.		LIST + TICK
			3. Dept. of Agriculture scale decal information.		
402	Aggregate Surface Course	CY	1. Form BC 981 or		Approved source & Shipment ticket
		Cu M	2. In-place measurements and calculations.		or
			Width and depth not to exceed plan dimension.		LIST + TICK
402	Aggregate Surface Course	SY	1. Form BC 981 or		Approved source & Shipment ticket
		Sq M	2. In-place measurements and calculations.		or
			Width not to exceed plan dimensions.		LIST + TICK
			3. Depth checks.		
403	Bit Materials (Prime Coat)	Gal	1. Weight tickets and calcs or		(LIST or TEST) + BOL
	& Bit Materials (Cover & Seal Coats) &	Liter	 DOA-approved meter tickets corrected for temp. Not truck distributor meter, unless meter has DOA decal. 		
	Polymerized (Cover & Seal Coats)		3. 105% maximum pay.		
			4. Dept. of Agriculture scale decal information.		
403	Bit Materials (Prime Coat)	Ton	1. Weight tickets.		(LIST or TEST) + BOL
	&	M Ton	2. 105% maximum pay.		
	Bit Materials (Cover & Seal Coat)		3. Dept. of Agriculture scale decal information.		

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
403	Cover Coat Aggregate	Ton	1. Wt. tickets with moisture correction.		Approved source & Shipment ticket
	&	M Ton	2. 110% maximum pay.		or
	Seal Coat Aggregate		3. Dept. of Agriculture scale decal information.		LIST + TICK
406 408	Bit Materials (Prime Coat) Polymerized (Prime Coat)	Gal Liter	 Weight tickets and calculations, or DOA-approved meter tickets corrected for 		(LIST or TEST) + BOL
400	r olymenzed (r nine Coal)	Liter	 2. DOA-approved meter lockets corrected for temp. Not truck distributor meter. 3. 105% maximum pay. 4. Dept. of Agriculture scale decal information. 		
406	Bit Materials (Prime Coat)	Ton	1. Weight tickets		(LIST or TEST) + BOL
408	Polymerized (Prime Coat)	M Ton	2. 105% maximum pay.		
			3. Dept. of Agriculture scale decal information.		
406	Aggregate Prime Coat	Ton	1. Weight tickets		Approved source & Shipment ticket
408		M Ton	2. Dept. of Agriculture scale decal information.		or
					LIST + TICK
406	Mix for Cracks Joints & Flangeways	Ton	1. Weight tickets initialed at jobsite		DPR + TICK + TEST
	& Leveling Binder Machine Method	M Ton	 Daily weight totals tabulated on calculator tape. 		
	& Leveling Binder Hand Method		 Platform scale tickets used in weight checks (where applicable). 		
	&		4. Dept. of Agriculture scale decal information.		
	HMA Binder Course		5. 103% maximum pay.		
	& HMA Surface Course Class I or Superpave		6. Smoothness test (for HMA surfaces)		

ECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
407	HMA Pavement (Full Depth)	SY	1. Form BC 981 or		DPR + TICK + TEST
		Sq M	In-place surface measurements and calcs, width not to exceed plan dimensions.		
			3. Depth checks.		
408	Incidental HMA Surfacing	Ton M Ton	For all plants: 1. Weight tickets initialed at jobsite		DPR + TICK + TEST
			2. Daily weight totals tabulated on calculator tape.		
			 Platform scale tickets used in weight checks (where applicable). 		
			4. Dept. of Agriculture scale decal information.		
			5. 103% maximum pay.		
420	PCC Pavement	SY	1. Form BC 981 or	39	DPR + TICK + TEST
	&	Sq M	2. In-place surface measurements and calcs.		
	HE PCC Pavement		Width not to exceed plan dimensions.		
	&		3. Depth checks.		
	PCC Pavement (Jointed)		 Surface tests (and price adjustment if necessary). 		
420	Bridge Approach Pavement	SY	1. Form BC 981 or	39	DPR + TICK + TEST
	&	Sq M	2. In-place surface measurements and calcs.		
	PCC Bridge Approach Shoulder		Width not to exceed plan dimensions.		
	Pavement		3. Depth checks.		

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
420	Bridge Approach Pavement Connector	SY Sq M	 Form BC 981 or In-place surface measurements and calcs. Width not to exceed plan dimensions. Depth checks. 	39	DPR + TICK + TEST
420	Welded Wire Reinforcement	SY Sq M	1. Same as pavement quantity	88	LIST + CERT
420	Protective Coat	SY Sq M	 Form BC 981 or In-place measurements and calculations of the area where Protective Coat is applied. 		LA15 or ILOK or TEST or CBM
421	Continuously Reinforced PCC Pavement	SY Sq M	 Form BC 981 or In-place surface measurements and calcs. Width not to exceed plan dimensions. Depth checks. 		DPR + TICK + TEST
421	Pavement Reinforcement	SY Sq M	1. Same as pavment quantity	88	LIST + CERT + MARK
421	Wide Flange Beam Terminal Joint Complete	Each	1. Date and Station in Quantity Book.	88	Concrete: DPR + TICK + TEST Rebar: LIST + CERT + MARK Epoxy Coated Rebar: LIST + CERT + MARK
					Steel beam: BBS 59 + CERT

|May 2020

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
421	Protective Coat	SY Sq M	 Form BC 981 or Measurements and calculations of the area where Protective Coat is applied. 		LA15 or ILOK or TEST or CBM
424	PCC Sidewalk	SF	 Form BC 981 or In-place surface measurements and calcs. Depth checks. Cross slope checks. 	86	DPR + TICK + TEST
481	Aggregate Shoulders Type A & Aggregate Shoulders Type B	Ton M Ton	 Wt. tickets with moisture correction, if required. 108% maximum pay. 		Approved source & Shipment ticket or LIST + TICK
481	Aggregate Shoulders Type A & Aggregate Shoulders Type B	CY Cu M	 Form BC 981 or In-place measurements and calculations. Width and depth not to exceed plan dimensions. 		Approved source & Shipment ticket or LIST + TICK
481	Aggregate Shoulders Type A & Aggregate Shoulders Type B	SY Sq M	 Form BC 981 or In-place surface measurements and calcs. Width not to exceed plan dimensions. Depth checks. 		Approved source & Shipment ticket or LIST + TICK
482	HMA Shoulders	SY Sq M	 Form BC 981 or In-place surface measurements and calcs. Width not to exceed plan dimensions. Depth checks. 		DPR + TICK + TEST

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
501	Concrete Removal	CY Cu M	1. Field measurements and calculations.		None
502	Structure Excavation & Cofferdam Excavation & Rock Excavation for Structure	CY Cu M	 Measurements of material in orginal position and calculations. See Spec. for maximum allowable limits of excavation for payment, or For BC 981, except for Rock Excavation for Structure, which must be measured. 		None
503	Class MS Concrete	CY	1. Form BC 981 or		DPR + TICK + TEST
	& Concrete Handrail	Cu M	Calculations in permanent file verifying plan, or revised, quantity and		
	& Concrete Encasement		 A statement indicating the structure was built in accordance with plan dimensions or a sketch showing measurement dimensions. 		
			4. Price adjustment (per Art. 503.22) if required.		
503	Concrete Structures	CY	1. Form BC 981 or		DPR + TICK + TEST
	& Concrete Superstructures	Cu M	Calculations in permanent file verifying plan, or revised, quantity and		
			 A statement indicating the structure was built in accordance with plan dimensions or a sketch showing measurement dimensions. 		
			 Deductions for volume of piling, except H pile per Art. 503.21 (b). 		
			5. Price adjustment (per Art. 503.22) if required.		

|May 2020

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
503	Rubbed Finish Form Liner Textured Surface	SF Sq M	 Form BC 981 or Measurements and calculations for the areas specified on the plans. 		None
504	Precast Concrete Bridge Slab	SF	1. Form BC 981 or		Precast Bridge Slab: LIST + ILOK
	& Precast Prestressed Concrete	Sq M	 Measurements and calculations of horizontal surface area. 		Precast Bridge Beams: LIST + ILOK
	Deck Beams				Prestressed Bridge Beams: ILOK
505	Furnish & Erect Structural Steel	LB	1. Approved Shop Drawings	87	Steel: Fabrication Inspector's
		Kg	Approved shipping weight tag or platform scale ticket or		Release (BBS 59) + CERT
			 Measurements, and calculations based on standard AISC section weights, deducting for holes, cutouts, etc. 		High-strength steel bolts: CBM or LA15 or ILOK or TEST
			 If authorized changes are made, the calculations for the changes necessary. 		
508	Reinforcement Bars	LB	1. Form BC 981 or	88	Rebar: LIST + CERT + MARK
		Kg	2. Calculations in permanent file verifying plan, or revised, quantity. Use the table given in Article 508.10.		Epoxy Coated Rebar: LIST + CERT + MARK

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
509	Steel Railing	Foot	1. Approved Shop Drawings	87	Steel Railing: CBM
	&	Meter	2. Measurements of overall length of top rail.		Aluminum Railing: CERT or LA15
	Aluminum Railing &		Measure through all posts and gaps.		Fasteners: CBM or LA15 or ILOK or TEST
	Pedestrian Railing & Bicycle Railing				Post, Anchoring Device: CERT or LA15
511	Slope Wall	SY	1. Form BC 981 or	88	Concrete: DPR + TICK + TEST
		Sq M	 Measurements of the surface. The construction of anchor and cut-off walls is incidental to this item. 		Mesh: LIST + CERT
			3. Depth checks.		
512	Furnishing Piles	Foot Meter	 Itemized list sent to the Contractor by the Engineer authorizing the length of piling 		Precast Concrete: LIST + ILOK
			to be ordered.		Prestressed Concrete: ILOK
			2. Piling field notes showing field measurements of the piles.		Steel H or Metal Shell: Cert or LA15 or ILOK
			3. Piling Diagram Report BC 2184		Timber: CERT or MARK or LA15
512	Drive Piles	Foot Meter	 Piling field notes showing field measurements of the piles left in place below the cut-off elevation. 		None
			2. Piling Diagram Report BC 2184		

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
542	Concrete Collar	CY	1. Form BC 981 or		Cast in Place: DPR + TICK + TEST
		Cu M	 Statement, "Built according to Standard ", or 		Precast: LIST + MARK
			3. If a standard collar is not used, computations verifying the plan quantity are required.		
			Rebar should be paid separately in lbs. (kg), as per Art. 542.11.		
550	Storm Sewer	Foot	1. In-place measurements.		Concrete: LIST + MARK
		Meter	See Article 550.09 & 602.12 regarding		Plastic: ILOK or LA15 or TEST
			the method of measurement at drainage structures.		Clay: ILOK or LA15 or TEST
580	Membrane Waterproofing	SY	1. Form BC 981 or		LA15 or TEST
		Sq M	 Measurements and calculations of the Surface areas covered. 		
606	Concrete Curb	Foot	1. In-place field measurements along the face.	86	DPR + TICK + TEST
		Meter	See Article 606.14 regarding the method of measurement at drainage structures.		
			2. Depth checks.		
606	Concrete Gutter	Foot	1. In-place field measurements in the flow line.	86	DPR + TICK + TEST
	& Comb. Concrete Curb & Gutter	Meter	See Article 606.14 regarding the method of measurement at drainage structures.		
			2. Depth checks.		

|May 2020

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
606	Paved Ditch	Foot Meter	 In-place field measurements in the flow line. The construction of anchor and cut-off walls is incidental to this item. Depth checks. 		DPR + TICK + TEST
611	Class SI Concrete Misc.	CY	1. Form BC 981 or		DPR + TICK + TEST
•••		Cu M	 Calculations in permanent file verifying plan, or revised, quantity and 		
			 A statement indicating the structure was built in accordance with plan dimensions or a sketch showing measured dimensions. 		
630	Steel Plate Beam Guard Rail	Foot Meter	 Measurements of the overall length of the rail element to the limits shown on the plans. 	87	Steel Plate Rail element: LIST + CEF
			End sections are incidental and will NOT be paid for separately.		Steel Post: CERT or LA15
					Barrier end section: NCHRP 350 Pdts. = (LIST + CERT) or LA15
					Non-NCHRP 350 Pdts CERT or LA15
					Fasteners: (MARK + CERT) or TES
					Wood Post: CERT or MARK or LA1
663	Calcium Chloride Applied	Ton M Tan	1. Weight tickets.		Dust Palliative: TEST
		M Ton			Accelerator: CERT

SECTION	CODE NO. & ITEM	PAY UNIT	REQUIRED DOCUMENTATION	CONST. MEMO.	EVIDENCE OF MATERIAL INSPECTION
664	Chain Link Fence	Foot Meter	 In-place measurements along fence from center to center of end posts, excluding the length occupied by gates. 		CERT or LA15
665	Woven Wire Fence	Foot Meter	 In-place measurements along fence from center to center of end posts, excluding the length occupied by gates. 		CERT or LA15
780	Thermoplastic Pavt. Marking Letters & Symbols	SY Sq M	 Calculations based on the size of letter or symbol specified in the contract. See table in Art. 780.12 for letter or 		Preformed Plastic Pavement Markings and Thermoplacstic Letters/Symbols: CERT or LA15
	Preformed Plastic Pavement Markings, Letters and Symbols		symbol areas. 2. Applied thickness (thermoplastic).		Preformed Plastic Pavement Markings and Thermoplastic Tape: LA15 or ILOK or CBM
					Preformed Plastic Pavement Markings and Themoplastic Component Material: LA15 or ILOK or CBM
780	Thermoplastic Pavt. Marking Line &	Foot Meter	1. Measurements of each size line applied and accepted.		Thermoplastic Tape: LA15 or ILOK or CBM
	Paint Pavement Marking Line & Epoxy Pavement Marking		 Applied thickness (epoxy, modified urethane, polyurea, and thermoplastic). 		Themoplastic Component Material: LA15 or ILOK or CBM
	& Preformed Plastic Pavt. Marking Line & Modified Urethane Marking Line &				Epoxy, modified urethane, polyurea, thermoplastic, and preformed plastic pavement markings: LA15 or CBM
	∝ Polyurea Marking Line				

Section D

REFERENCE TABLES

ESTIMATING DAILY EARTH VOLUMES WITH LOAD COUNTS

Page A-10 of this Documentation Guide presents a concept called "Progress Documentation." Simply stated, it is necessary to provide documented entries in the Quantity Book as work progresses, even though final measurements will usually be provided after the pay item is completed. Therefore, with many pay items, the progress documentation may be based upon nothing more than a recorded <u>estimate</u> of work done.

This section deals with a method of estimating Excavation pay items.

Enclosed is a brief excerpt of hauling volumes of some of the scrapers and hauling units being used in the State. If a piece of equipment is being used and the inspector is estimating earth volumes by load count, have the Contractor provide a specification sheet for the piece(s) of equipment in question. The specification sheet will provide <u>struck</u> capacities. Information can also be obtained from online resources or from the District estimator. Examples are included herein. The following example indicates the procedure that may be used in estimating earth volumes utilizing the struck capacities as shown on available equipment manufacturer's specification sheets or other commercially available resources. Provide a reference to the information on your calculation sheet and store a copy in the job files and/or attach to the daily report.

- 1. Obtain the daily load count from the contractor. Spot-check occasionally for accuracy.
- 2. From the specification sheet for the piece of equipment in question, select the <u>struck</u> capacity for the model being used.
- 3. Multiply the product of the load count and struck capacity by 80%. (This factor may vary somewhat with various materials and loading procedures, but any factor differing from 80% must be documented as to explain the reasoning.)

Example: 70 loads hauled by a CAT 621G.

The days volume = $70 \text{ loads } x \ 15.7 \text{ cy } x \ 80\% = 879 \text{ cy}$ $879 \text{ cy } x \ 0.764555 \text{ m}^3/\text{cy} = 672 \text{ m}^3$

4. The above information and calculations shall be recorded on source documentation, such as the Inspector's Daily Report, Form BC 628, (Example, page F-24). When subsequent days of excavation take place with the same hauling units, if these are also estimated quantities, the source documents shall reference the first source document on which the struck capacity is shown.

8/7/2018 Caterpillar 621G Motor Scraper 📢 🚺 Select language RITCHIE Specs Everything about Equipment Current number of specifications <u>Home - Spec Search - con - Motor Scraper - Caterpillar - 6216</u> CATERPILLAR 621G MOTOR SCRAPER VIEW ARTICLES ON THIS ITEM 🖶 Print specification Looking to purchase this item? Need to sell equipment? Find a Caterpillar 621G Notor Scraper being sold at Ritchie Bros. auctions. Complete this form and a Ritchie Bros. representative will contact you. 0 A D Selected Dimensions Dimensions A. OVERALL LENGTH 42.4 ft in 12917 mm B. OVERALL WIDTH 11.4 ft in 3467 mm C. OVERALL HEIGHT 12.2 ft in 3705 mm D. WHEELBASE 25.4 ft in 7722 mm

553 mm

3423 mm

1.8 ft in

11.3 ft in

Specification

E. TRACTOR GROUND CLEARANCE

F. HEIGHT TO TOP OF CAB

Tractor Engine		
MAKE	Caterpillar	
MODEL	C15 ACERT	
GROSS POWER	393 hp	293 kw
NET POWER	365 hp	272 kw
DISPLACEMENT	893 cu in	14.6 L
Operationa l		
FUEL CAPACITY	160 gal	606 L
COOLING SYSTEM FLUID CAPACITY	28 gal	107 L
ENGINE OIL FLUID CAPACITY	9.5 gal	36 1
TRANSMISSION FLUID CAPACITY	19 gal	72 L
DIFFERENTIAL FLUID CAPACITY	38 gal	144 L
HYDRAULIC SYSTEM FLUID CAPACITY	37 gal	140 L
WHEEL COOLANT FLUID CAPACITY - EACH	12 gal	45 L
OPERATING VOLTAGE	24 V	
ALTERNATOR SUPPLIED AMPERAGE	75 amps	
TIRE SIZE	33.25-R29	
Transm ission		
TYPE	8-speed automatic Powe Control	rshift with Electronic
NUMBER OF FORWARD GEARS	8	
NUMBER OF REVERSE GEARS	1	
MAX SPEED FORWARD	32 mph	51.5 km/h
MAX SPEED REVERSE	5.7 mph	9.2 km/h
Weights		
TOTAL OPERATING - EMPTY	73788.7 lb	33470 kg



http://www.ritchiespecs.com/specification?type=con&category=Motor+Scraper&make=Caterpillar&model=621G&modelid=94090

1/2

FRONT AXLE - EMPTY	50177.2 %			
REAR AXLE - EMPTY	23611.5 %		Viewing Photo 1 of 5	
TOTAL OPERATING - LOADED	126589.4 lb	57420 kg		
FRONT AXEL - LOADED	67093.3 lb	30433 kg		
REAR AXLE - LOADED	59496.1 %			
Bowl				
RATED PAYLOAD	52800 lb	23950 kg		
HEAPED CAPACTIY	22 yd3	17 m3		
STRUCK CAPACITY	15.7 yd3	12 m3		
MAX DEPTH OF CUT	13.1 in	333 mm		
WIDTH OF CUT	9.1 ft in	3023 mm		
Dimensions				
OVERALL LENGTH	42.4 ft in	12917 mm		
OVERALL WIDTH	11.4 ft in	3467 mm		
HEIGHT TO TOP OF CAB	11.3 ft in	3423 mm		
OVERALL HEIGHT	12.2 ft in	3705 mm		
WHEELBASE	25.4 ft in	7722 mm		
TRACTOR GROUND CLEARANCE	1.8 ft in	553 mm		

© 2007-2018 RitchieSpecs Equipment Specifications Ritchie Bros. Auctioneers © | <u>Terms of Use</u> | <u>Privacy Statement</u> OEM specifications are provided for base units. Actual equipment might vary with options.

http://www.ritchiespecs.com/specification?type=con&category=Motor+Scraper&make=Caterpillar&model=621G&modelid=94090

8/7/2018

Terex TR45 Rock Truck



VIE W ARTICLES ON THIS ITEM

Current number of specifications

Home - Spec Search - con - Rock Truck - Terex - TR45

TEREX TR45 ROCK TRUCK

🖶 Print specification


Looking to purchase this item?

Find a Terex TR45 Rock Truck being sold at Ritchie Bros. auctions.

RITCHIESpecs Everything about Equipment

Need to sell equipment?

Complete this form and a Ritchie Bros. representative will contact you.

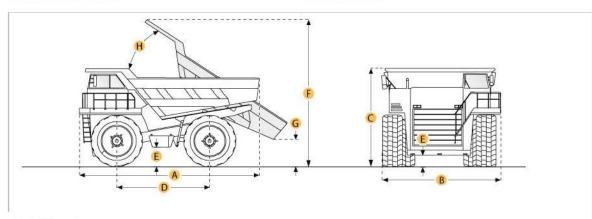

Selected Dimensions

Di	mensions

Dimensions		
A. OVERALL LENGTH	28.5 ft in	8700 mm
B. OVERALL WIDTH	15.2 ft in	46 30 mm
C. OVERALL HEIGHT	13.9 ft in	42 45 mm
D. WHEELBASE	12.9 ft in	3940 mm
E. GROUND CLEARANCE	1.9 ft in	585 mm
F. DUMP HEIGHT	25.1 ft in	7645 mm
G. DUMP GROUND CLEARANCE	1.9 ft in	585 mm
Dump		
H. DUMP ANGLE	58 degrees	
Specification		
Engine		
NUMBER OF CYLINDERS	6	
MAKE	2347	
MODEL	QSK19-C525	
GROSS POWER	525 hp	391.5 kw
NET POWER	495 hp	369.1 kw
POWER MEASURED @	2100 rpm	
DISPLACEMENT	1150 cu in	18.8 L
MAX TORQUE	1775 lb ft	2 40 6.6 Nm
TORQUE MEASURED @	1300 rpm	
ASP IRATION	turbocharged	
Operational		
FUEL CAPACITY	160.1 gal	606 L
COOLING SYSTEM FLUID CAPACITY	38 gal	144 L
ENGINE OIL CAPACITY	16.4 gal	62 L
DIFF AND FINAL DRIVE FLUID CAPACITY	15.9 gal	60 L
STEERING SYSTEM FLUID CAPACITY	22.5 gal	85 L
HYDRAULIC SYSTEM FLUID CAPACITY	97.2 gal	368 L
OPERATING VOLTAGE	24 V	
ALTERNATOR SUPPLIED AMPERAGE	70 amps	
TIRE SIZE	21.00-35 bias ply	y
Transmission		
TYPE	Allison M5610AR	

http://www.ritchiespecs.com/specification?type=con&category=Rock+Truck&make=Terex&model=TR45&modelid=93305

2018		Terex TR45 Roc	K I
NUMBER OF GEARS - FORWARD	6		
NUMBER OF GEARS - REVERSE	2		
MAX SPEED	40.4 mph	65 km/h	
Weights			
EMPTY WEIGHT	81870 lb	37135.6 kg	
LOADED WEIGHT	171870 lb	77958.9 kg	
WEIGHT DISTRIBUTION FRONT - EMPTY	48 %		
WEIGHT DISTRIBUTION REAR - EMPTY	52 %		
WEIGHT DISTRIBUTION FRONT - LOADED	34 %		
WEIGHT DISTRIBUTION REAR - LOADED	66 %		
Dump			
RATED PAYLOAD	90000 lb	40823.3 kg	
LOAD CAPACITY - STRUCK	25.6 yd3	19.6 m3	
LOAD CAPACITY - HEAPED	34 yd3	26 m3	
DUMP ANGLE	58 degrees		
RAISE TIME	13 sec		
LOWER TIME	9 sec		
Dimensions			
OVERALL LENGTH	28.5 ft in	8700 mm	
OVERALL WIDTH	15.2 ft in	4630 mm	
OVERALL HEIGHT	13.9 ft in	42.45 mm	
WHEELBASE	12.9 ft in	3940 mm	
GROUND CLEARANCE	1.9 ft in	585 mm	
DUMP HEIGHT	25.1 ft in	7645 mm	
DUMP GROUND CLEARANCE	1.9 ft in	585 mm	

© 2007-2018 RitchieSpecs Equipment Specifications Ritchie Bros. Auctioneers © | <u>Terms of Use</u> | <u>Privacy Statement</u> OEM specifications are provided for base units. Actual equipment might vary with options.

http://www.ritchiespecs.com/specification?type=con&category=Rock+Truck&make=Terex&model=TR45&modelid=93305

When performing a series of arithmetic operations (i.e. addition, subtraction, division, multiplication, exponents), you must perform those operations in a particular order. There is a mnemonic to help you remember the order - PEMDAS:

- P Parentheses
- E Exponents
- M Multiplication
- D Division
- A Addition
- S Subtraction

If you have a series of operations, do what's in parentheses first, then apply exponents, then do any multiplication or division, and finally do any adding or subtracting.

Example: $4 + 3\left(2 - \frac{1}{4}\right) - 2^3 = ?$


Do what's in parentheses first (find Lowest Common Denominator - LCD):

 $2 - \frac{1}{4} = \frac{8}{4} - \frac{1}{4} = \frac{7}{4}$


So now we have $4 + 3\left(\frac{7}{4}\right) - 2^3 = ?$ Now apply exponents: $2^3 = 8$ So now we have $4 + 3\left(\frac{7}{4}\right) - 8 = ?$ Now do multiplication: $3\left(\frac{7}{4}\right) = \frac{21}{4}$ So now we have $4 + \frac{21}{4} - 8$ Now do addition and subtraction (find LCD): $4 + \frac{21}{4} - 8$ is the same as $\frac{16}{4} + \frac{21}{4} - \frac{32}{4} = \frac{5}{4}$ So our answer is $\frac{5}{4}$. Note: **"h**" is at right angles (90°) to base **"b**". When taking field measurements make sure data is collected with this in mind.

Area of Plane Shapes

Learn more about Area, or try the Area Calculator.

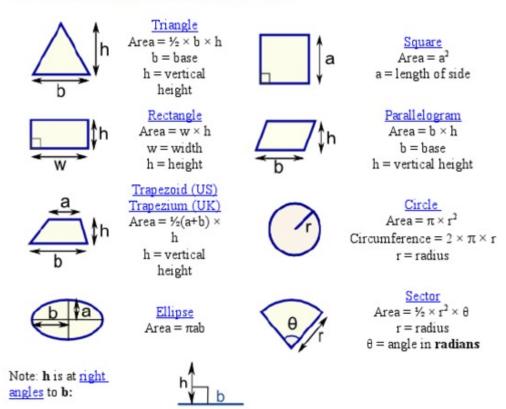


Example: What is the area of this rectangle?



The formula is:


 $Area = w \times h$ w = widthh = height


REFERENCE TABLES

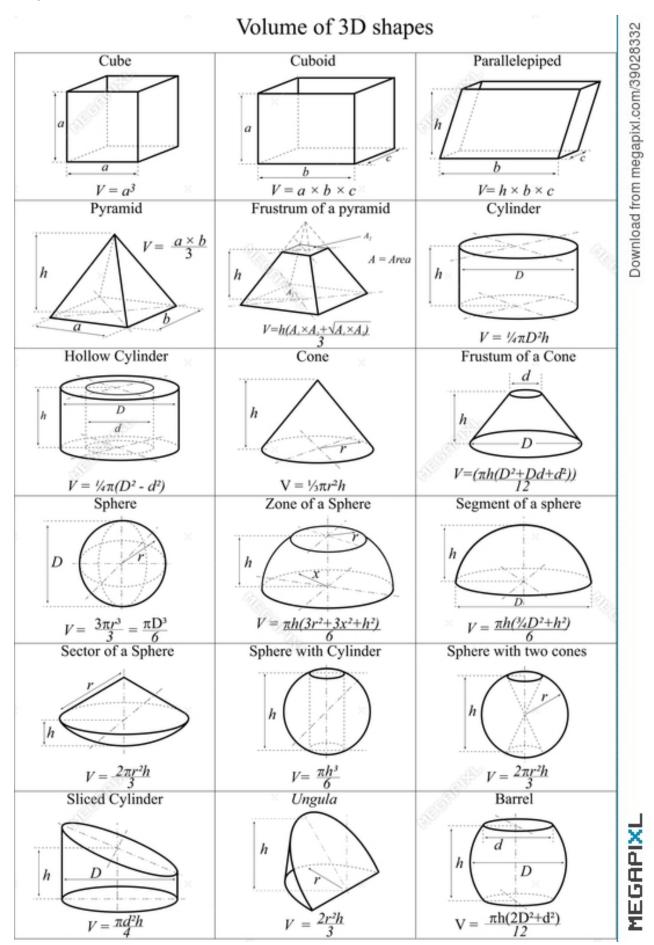

A	c o D b C E Right Triangle	A B C C Oblique Triangle
Right Triangles	5	
$\sin A = \frac{a}{c} = \cos \frac{b}{c}$		$\sec A = \frac{c}{b} = \csc B$
$\cos A = \frac{b}{c} = s$		$cosec A = \frac{c}{a} = sec B$
$\tan A = \frac{a}{b} = \cot b$		$\cot A = \frac{b}{a} = \tan B$
	$\cos B = b \tan A = b \cot B = \sqrt{c^2 - b}$ $\sin B = a \cot A = a \tan B = \sqrt{c^2 - a}$	
	$= \frac{b}{b} = \frac{b}{b}$	
sin A cos	B sin B cos A	
Oblique Triang	les	
Given	Sought	Formula
A, B, a	b, c	b = $\frac{a}{\sin A} \cdot \sin B$ c = $\frac{a}{\sin A} \cdot \sin (A+B)$
A, a, b	B, c	$\sin B = \frac{\sin A}{a} \cdot b$ $c = \frac{a \sin (A + \arcsin (b \sin A/a))}{\sin A}$
C, a, b	$\frac{1}{2}(A + B)$	$\frac{1}{2}(A+B) = 90^{\circ} - \frac{1}{2}C$
	$\frac{1}{2}(A - B)$	Tan $\frac{1}{2}$ (A - B) = $\frac{a - b}{a + b} \cdot \tan \frac{1}{2}$ (A+B)
a, b, c	A	Given s = $\frac{1}{2}$ (a+b+c), then:
		$\sin \frac{1}{2} A = \sqrt{\frac{(s - b)(s - c)}{bc}}$
		$\cos\frac{1}{2} A = \sqrt{\frac{s(s-a)}{bc}}$
		$\tan \frac{1}{2} A = \sqrt{\frac{(s - b)(s - c)}{s(s - a)}}$
		$\sin A = 2 \frac{\sqrt{s(s-a)(s-b)(s-c)}}{bc}$
	Area	Area = $\sqrt{s(s-a)(s-b)(s-c)}$
c, a, b	Area	Area = $\frac{1}{2}$ ab sin C

This section presents mathematical formulas used by IDOT for various quantity determinations.

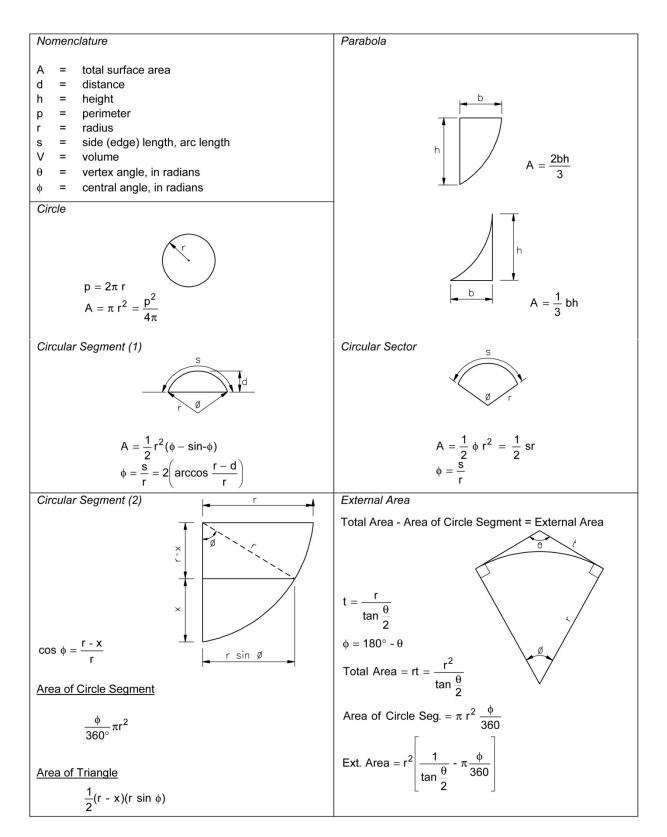

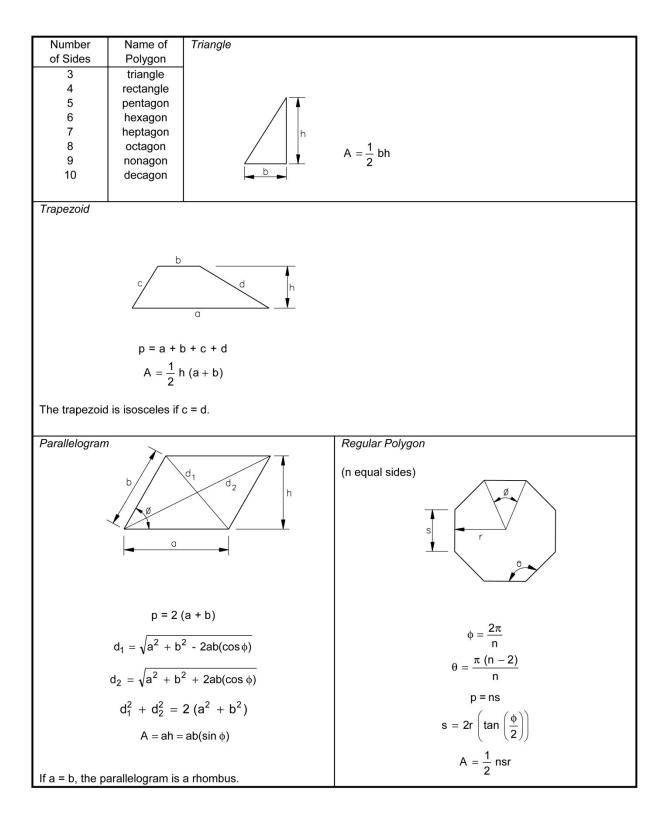

RECOMMENDED CHECKING PROCEDURES

The Checker assumes responsibility for all errors made by the Preparer that are not caught by the Checker!


DO NOT ERASE ERRORS! Cross out the original entry with a single line and correct.

$$AREA A = \frac{1}{2}(8.0' + 12.0') \times 472' \times (\frac{1}{8}) = 524.4 \text{ S.Y.}$$

Show what you have checked by making small check marks.

- Checking involves much more than punching numbers into a calculator. The following is a partial list of things that the checker should be reviewing:
 - All items on any sketches were properly labeled, and the measurements were correctly transferred from the original sketch to the equations.
 - The correct equation was used.
 - The Stationing is correct.
 - The Pay Item, Pay Item Number, and Fund Code are correct.
 - All necessary yield checks have been made. You should also note if the yield is within the spec. (If it is out of spec, then an explanation of the factors that would account for the deviation or actions that were taken should be noted.)
 - The "Quantity and Units" column of the IDR matches the calculated value and the pay item requirements.
 - All numbers have been correctly rounded-off, in accordance with Section B of the Documentation Manual.
 - Each pay item is labeled as an "estimate" or a "final measurement." (A final measurement is one that cannot or will not be re-measured.)
 - The date, Contractor/Subcontractor, weather, and job stamp information have been completed on the IDR.
 - "Measured by," "Calculated by" and "Checked by" have been initialed and dated.
 - All tonnage and gallon tickets have been initialed, correctly tallied and bound.
 - The "Evidence of Inspection" has been completed in accordance with the PPG, or Section C of the Documentation Manual.

Remember: "Any place a mistake might be made, sooner or later, it will be made!"

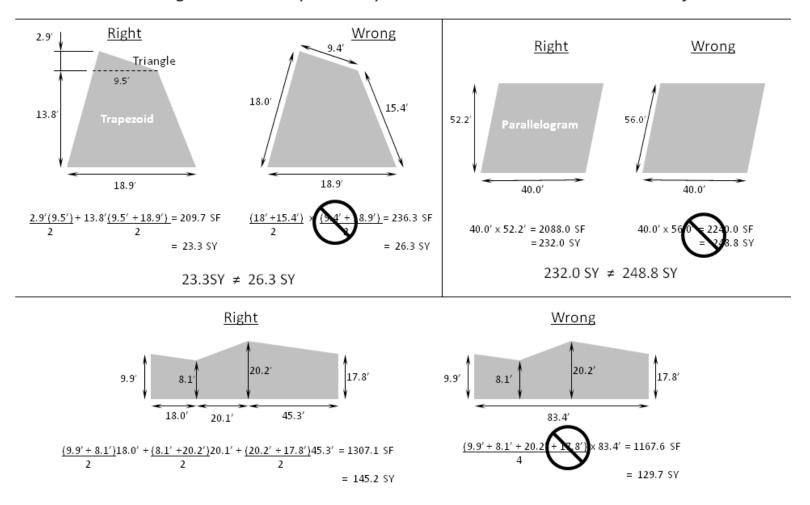

Break areas into geometric shapes that you can calculate & use the correct formulas!

145.2 SY ≠ 129.7 SY

Common Conversions

Acre = 43,560 sq ft

Weight of 1 gallon of water = 8.328 lb

Weight of 1 cubic foot of water = 62.4 lb

Weight of 1 gallon of liquid other than water = 8.328 lb/gal x Specific Gravity of material (Sp. Gr.)

Volume in gallons = $\frac{net weght of material. lb}{8.328 lb/gal x Sp. Gr.}$

Pi π = 3.1416

Typical weight of HMA = 112 lb/sq yd/in

Typical weight of reinforced concrete = 150 pounds/cu ft

- 1 Square yard = 9 Square feet
- 1 Cubic yard = 27 Cubic feet

1 Ton = 2,000 Pounds

Other conversions can be found in the Appendix of the Standard Specifications for Road and Bridge Construction.

Section E


TRENCH BACKFILL TABLES FOR CONCRETE PIPES

These tables can be used by the designer or the engineer to determine the volume of TRENCH BACKFILL that can be paid for when backfilling storm sewer trenches. Maximum trench widths adopted by the January 1, 2022 Standard Specifications are used.

NOTE: If the trench depth is 5ft. (1.5m) and less, <u>with protection</u>, the values included in the tables herein will be of no value. The engineer will have to calculate the actual volume of TRENCH BACKFILL using the formulas included within this section.

The calculated volumes are based on the use of standard **English sized pipes** which meet the tolerances of the Metric pay item.

TRENCH BACKFILL TABLE FOR CIRCULAR CONCRETE PIPE, ENGLISH

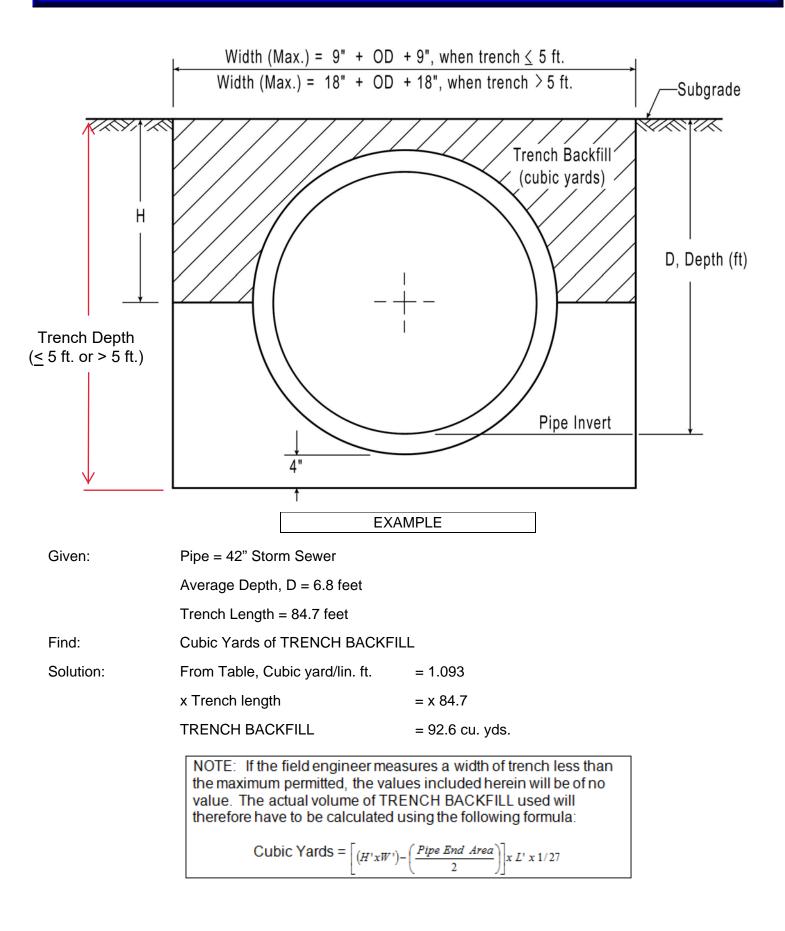


	le Diameter I thickness	8" 1.667"	10" 1.833"	12" 2.00"	15" 2.25"	18" 2.50"	21' 2.75'
	2.0	0.138	0.136	0.132	0.121	0.105	0.083
	2.2	0.156	0.155	0.152	0.143	0.130	0.111
	2.4	0.174	0.175	0.173	0.167	0.155	0.138
	2.6	0.192	0.194	0.194	0.190	0.180	0.166
	2.8	0.210	0.214	0.215	0.213	0.205	0.193
	3.0	0.228	0.234	0.236	0.236	0.231	0.220
	3.2	0.246	0.253	0.257	0.259	0.256	0.248
	3.4	0.264	0.272	0.278	0.282	0.281	0.27
Be	3.6	0.282	0.292	0.299	0.305	0.307	0.303
Ä	3.8	0.300	0.311	0.320	0.329	0.332	0.33
to	4.0	0.319	0.331	0.341	0.352	0.358	0.35
e.	4.2	0.336	0.350	0.362	0.375	0.383	0.38
= Average Depth of Trench from Subgrade to Invert of Pipe	4.4	0.354	0.370	0.383	0.398	0.408	0.41
9	4.6	0.610	0.622	0.632	0.642	0.647	0.64
ade	4.8	0.639	0.653	0.664	0.676	0.684	0.68
ß	5.0	0.668	0.683	0.696	0.711	0.720	0.72
qn	5.2	0.698	0.714	0.728	0.745	0.756	0.76
E	5.4	0.727	0.745	0.760	0.779	0.793	0.80
<u>ē</u>	5.6	0.756	0.776	0.792	0.813	0.829	0.84
동	5.8	0.785	0.807	0.824	0.848	0.866	0.87
eŭ	6.0	0.815	0.837	0.856	0.882	0.902	0.07
Ē	6.2						0.91
Jo I		0.844	0.867	0.888	0.916	0.938	
bt	6.4	0.873	0.898	0.921	0.950	0.975	0.99
å	6.6	0.903	0.929	0.953	0.985	1.011	1.03
90	6.8	0.932	0.959	0.985	1.019	1.048	1.07
Ja	7.0	0.961	0.990	1.017	1.053	1.084	1.11
Ă	7.2	0.990	1.021	1.049	1.087	1.121	1.14
	7.4	1.019	1.051	1.081	1.122	1.157	1.18
D(#)	7.6	1.049	1.082	1.113	1.156	1.193	1.22
	7.8	1.078	1.113	1.145	1.190	1.230	1.26
	8.0	1.107	1.143	1.177	1.224	1.266	1.30
	8.2	1.136	1.174	1.209	1.259	1.303	1.34
	8.4	1.165	1.205	1.241	1.293	1.340	1.38
	8.6	1.195	1.235	1.274	1.328	1.376	1.41
	8.8	1.224	1.266	1.306	1.362	1.412	1.45
	9.0	1.253	1.297	1.338	1.396	1.449	1.49
	9.2	1.282	1.327	1.370	1.430	1.485	1.53
	9.4	1.311	1.358	1.402	1.465	1.522	1.57
	9.6	1.341	1.389	1.435	1.499	1.558	1.61
	9.8	1.370	1.419	1.467	1.533	1.594	1.65
	10.0	1.399	1.450	1.499	1.568	1.631	1.68
	10.2	1.428	1.481	1.531	1.602	1.667	1.72
	10.4	1.457	1.511	1.563	1.636	1.704	1.76
	10.6	1.487	1.542	1.595	1.671	1.740	1.80
	10.8	1.516	1.573	1.627	1.705	1.776	1.84
	11.0	1.545	1.603	1.659	1.739	1.813	1.88
	11.2	1.574	1.634	1.691	1.773	1.849	1.00
	11.4	1.603	1.665	1.723	1.808	1.886	1.92
	11.6	1.633	1.696	1.723	1.842	1.922	1.90
	11.6			1.755	1.842		
r ocek - l	ditional 0.2' depth	1.662	1.726	1.700	1.070	1.958	2.03
	monal u Z denth						

24" 3.00"	27" 3.25"	30" 3.50"	33" 3.75"	36" 4.00"	42" 4.50"
0.116					
0.146	0.121				
0.175	0.152	0.124			
0.205	0.184	0.158			
0.235	0.216	0.192	0.163		
0.264	0.248	0.226	0.199	0.168	
0.294	0.280	0.260	0.236	0.206	
0.323	0.311	0.294	0.272	0.244	
0.353	0.343	0.328	0.308	0.282	0.216
0.383	0.375	0.362	0.344	0.321	0.259
					0.448
					0.502
					0.556
					0.610
					0.663
					0.717
					0.77
					0.824
					0.878
					0.873
					0.98
					1.03
					1.09
					1.14
					1.20
					1.25
					1.30
					1.36
					1.41
			1.445		1.46
1.416			1.493	1.508	1.52
1.457	1.490		1.540	1.557	1.57
1.498	1.533	1.563	1.587	1.607	1.63
1.539	1.576	1.608	1.635	1.656	1.68
1.579	1.619	1.653	1.682	1.706	1.73
1.620	1.662	1.698	1.729	1.755	1.79
1.661	1.704	1.743	1.776	1.804	1.84
1.701	1.747	1.788	1.823	1.854	1.89
1.742	1.790	1.833	1.871	1.903	1.95
1.783	1.833	1.878	1.918	1.953	2.00
					2.06
					2.11
					2.16
					2.22
					2.27
					2.32
					2.38
					2.30
					2.49
2.191	2.262	2.329	2.390	2.446	2.54
+0.0407	+0.0420	+0.0451	+0.0472	+0 0404	
+0.0407	+0.0429	+0.0451	+0.0472	+0.0494	+0.053
	3.00" 0.116 0.146 0.175 0.205 0.235 0.235 0.264 0.294 0.323 0.353 0.353 0.383 0.412 0.642 0.683 0.723 0.764 0.805 0.846 0.805 0.846 0.886 0.927 0.968 1.009 1.049 1.053 1.212 1.253 1.294 1.335 1.375 1.416 1.457 1.498 1.539 1.579 1.620 1.661 1.701	3.00"3.25"0.1160.1460.1210.1750.1520.2050.1840.2350.2160.2640.2480.2940.2800.3230.3110.3530.3430.3530.3430.3830.3750.4120.4070.6420.6320.6830.6740.7230.7170.7640.7600.8050.8030.8460.8460.8860.8890.9270.9320.9680.9751.0091.0181.0491.0611.0901.1031.1311.1461.1721.1891.2121.2321.2531.2751.2941.3181.3351.3611.3751.4041.4161.4471.4571.4901.4981.5331.5391.5761.5791.6191.6201.6621.6611.7041.7421.7901.7831.8331.8241.8761.8641.9191.9051.9621.9462.0051.9872.0482.0282.0912.1912.262	3.00" 3.25" 3.50" 0.116 0.146 0.121 0.175 0.152 0.124 0.205 0.184 0.158 0.235 0.216 0.192 0.264 0.248 0.226 0.294 0.280 0.260 0.323 0.311 0.294 0.353 0.343 0.328 0.383 0.375 0.362 0.412 0.407 0.571 0.642 0.632 0.616 0.683 0.674 0.661 0.723 0.717 0.706 0.764 0.760 0.751 0.805 0.803 0.796 0.846 0.841 0.886 0.927 0.932 0.931 0.968 0.975 0.976 1.009 1.018 1.022 1.049 1.061 1.067 1.090 1.103 1.112 1.131 1.146 1.157 <td< td=""><td>3.00" 3.25" 3.50" 3.75" 0.116 0.146 0.121 0.175 0.152 0.124 0.205 0.184 0.192 0.163 0.264 0.248 0.226 0.199 0.264 0.248 0.226 0.192 0.163 0.264 0.248 0.226 0.199 0.294 0.280 0.260 0.236 0.323 0.311 0.294 0.272 0.353 0.343 0.328 0.308 0.383 0.375 0.362 0.344 0.412 0.407 0.571 0.548 0.642 0.632 0.616 0.695 0.683 0.674 0.661 0.643 0.723 0.717 0.706 0.690 0.764 0.760 0.751 0.737 0.805 0.803 0.796 0.973 0.927 0.932 0.931 0.926 0.968 0.975 1.976 1.068 <!--</td--><td>3.00" 3.25" 3.50" 3.75" 4.00" 0.116 0.121 0.175 0.152 0.124 0.205 0.184 0.158 0.235 0.216 0.199 0.163 0.225 0.216 0.192 0.163 0.264 0.248 0.226 0.199 0.168 0.224 0.280 0.260 0.236 0.264 0.244 0.323 0.311 0.294 0.272 0.244 0.353 0.343 0.328 0.308 0.282 0.383 0.375 0.362 0.344 0.321 0.412 0.407 0.571 0.548 0.520 0.668 0.674 0.661 0.643 0.619 0.723 0.717 0.766 0.777 0.718 0.866 0.899 0.866 0.865 0.803 0.796 0.973 0.964 1.063 1.063 1.090 1.018 1.022 1.020 1.014 1.049 1.063 1.053</td></td></td<>	3.00" 3.25" 3.50" 3.75" 0.116 0.146 0.121 0.175 0.152 0.124 0.205 0.184 0.192 0.163 0.264 0.248 0.226 0.199 0.264 0.248 0.226 0.192 0.163 0.264 0.248 0.226 0.199 0.294 0.280 0.260 0.236 0.323 0.311 0.294 0.272 0.353 0.343 0.328 0.308 0.383 0.375 0.362 0.344 0.412 0.407 0.571 0.548 0.642 0.632 0.616 0.695 0.683 0.674 0.661 0.643 0.723 0.717 0.706 0.690 0.764 0.760 0.751 0.737 0.805 0.803 0.796 0.973 0.927 0.932 0.931 0.926 0.968 0.975 1.976 1.068 </td <td>3.00" 3.25" 3.50" 3.75" 4.00" 0.116 0.121 0.175 0.152 0.124 0.205 0.184 0.158 0.235 0.216 0.199 0.163 0.225 0.216 0.192 0.163 0.264 0.248 0.226 0.199 0.168 0.224 0.280 0.260 0.236 0.264 0.244 0.323 0.311 0.294 0.272 0.244 0.353 0.343 0.328 0.308 0.282 0.383 0.375 0.362 0.344 0.321 0.412 0.407 0.571 0.548 0.520 0.668 0.674 0.661 0.643 0.619 0.723 0.717 0.766 0.777 0.718 0.866 0.899 0.866 0.865 0.803 0.796 0.973 0.964 1.063 1.063 1.090 1.018 1.022 1.020 1.014 1.049 1.063 1.053</td>	3.00" 3.25" 3.50" 3.75" 4.00" 0.116 0.121 0.175 0.152 0.124 0.205 0.184 0.158 0.235 0.216 0.199 0.163 0.225 0.216 0.192 0.163 0.264 0.248 0.226 0.199 0.168 0.224 0.280 0.260 0.236 0.264 0.244 0.323 0.311 0.294 0.272 0.244 0.353 0.343 0.328 0.308 0.282 0.383 0.375 0.362 0.344 0.321 0.412 0.407 0.571 0.548 0.520 0.668 0.674 0.661 0.643 0.619 0.723 0.717 0.766 0.777 0.718 0.866 0.899 0.866 0.865 0.803 0.796 0.973 0.964 1.063 1.063 1.090 1.018 1.022 1.020 1.014 1.049 1.063 1.053

	ide Diameter all thickness	48" 5.00"	54" 5.50"	60" 6.00"	66" 6.50"	72" 7.00"	78 7.50
	4.6	0.414					
	4.8	0.472					
	5.0	0.530	0.430				
	5.2	0.588	0.492				
	5.4	0.646	0.555				
	5.6	0.704	0.617	0.509			
	5.8	0.762	0.679	0.576			
Φ	6.0	0.820	0.742	0.643			
Pipe	6.2	0.878	0.804	0.709	0.594		
of	6.4	0.936	0.866	0.776	0.665		
ar	6.6	0.994	0.929	0.843	0.736	0.608	
Ž	6.8	1.052	0.991	0.909	0.807	0.683	
9	7.0	1.110	1.053	0.976	0.878	0.759	
de 1	7.2	1.168	1.116	1.043	0.949	0.834	0.69
la	7.4	1.226	1.178	1.109	1.020	0.909	0.77
Ĝ	7.6	1.284	1.240	1.176	1.091	0.985	0.85
D(ft) = Average Depth of Trench from Subgrade to Invert of	7.8	1.342	1.303	1.243	1.162	1.060	0.93
B	8.0	1.400	1.365	1.309	1.233	1.135	1.01
- Li	8.2	1.458	1.428	1.376	1.304	1.211	1.09
2	8.4	1.517	1.490	1.443	1.375	1.286	1.17
<u>n</u>	8.6	1.575	1.553	1.510	1.446	1.362	1.25
J	8.8	1.633	1.615	1.576	1.517	1.437	1.33
÷	9.0	1.691	1.677	1.643	1.588	1.512	1.41
de la	9.2	1.749	1.739	1.710	1.659	1.588	1.49
9	9.4	1.807	1.802	1.776	1.730	1.663	1.57
යි	9.6	1.865	1.864	1.843	1.801	1.738	1.65
Me	9.8	1.923	1.927	1.910	1.872	1.813	1.73
-	10.0	1.923	1.927	1.910	1.943	1.889	1.8
(H)	10.2	2.039	2.051	2.043	2.014	1.964	1.89
ă	10.2	2.039	2.031	2.043	2.014	2.039	1.03
	10.6	2.155	2.176	2.177	2.156	2.115	2.05
	10.8	2.213	2.238	2.243	2.227	2.190	2.13
	11.0	2.271	2.300	2.310	2.298	2.265	2.2
	11.2	2.329	2.363	2.377	2.369	2.341	2.29
	11.4	2.387	2.425	2.443	2.440	2.416	2.37
	11.6	2.445	2.487	2.509	2.511	2.491	2.45
	11.8	2.503	2.550	2.576	2.582	2.566	2.53
	12.0	2.561	2.612	2.643	2.653	2.642	2.61
	12.2	2.619	2.675	2.709	2.724	2.717	2.69
	12.4	2.677	2.738	2.776	2.795	2.792	2.77
	12.6	2.735	2.800	2.843	2.866	2.868	2.84
	12.8	2.793	2.862	2.909	2.937	2.943	2.92
	13.0	2.852	2.925	2.976	3.008	3.018	3.00
	13.2	2.910	2.987	3.043	3.079	3.094	3.08
	13.4	2.968	3.049	3.110	3.150	3.169	3.16
	13.6	3.026	3.111	3.176	3.221	3.244	3.24
	13.8	3.084	3.174	3.243	3.292	3.320	3.32
	14.0	3.142	3.236	3.310	3.363	3.395	3.40
	14.2	3.200	3.298	3.376	3.434	3.470	3.48
	14.4		3.361		3.505	3.545	3.56

	side Diameter Vall thickness	84" 8.00"	90" 8.50"	96" 9.00"	102" 9.50"	108" 10.00"
	7.8	0.795				
	8.0	0.879				
	8.2	0.963				
	8.4	1.047	0.896			
	8.6	1.131	0.984			
	8.8	1.215	1.073	0.910	0.726	0.522
	9.0	1.299	1.161	1.002	0.823	0.623
	9.2	1.382	1.249	1.095	0.920	0.724
	9.4	1.466	1.338	1.187	1.017	0.825
	9.6	1.550	1.426	1.280	1.114	0.927
8	9.8	1.634	1.514	1.373	1.211	1.028
Ē	10.0	1.718	1.602	1.467	1.307	1.129
o	10.2	1.802	1.690	1.558	1.404	1.230
/eu	10.4	1.886	1.778	1.650	1.501	1.331
<u> </u>	10.6	1.970	1.866	1.743	1.598	1.433
Q	10.8	2.054	1.955	1.835	1.695	1.534
ade	11.0	2.138	2.043	1.928	1.792	1.635
b	11.2	2.222	2.131	2.021	1.889	1.737
gng	11.4	2.306	2.220	2.113	1.986	1.838
ε	11.6	2.390	2.308	2.206	2.083	1.939
Q	11.8	2.474	2.396	2.298	2.180	2.040
5	12.0	2.558	2.485	2.391	2.277	2.141
Ģ	12.2	2.642	2.573	2.484	2.374	2.243
Ē	12.4	2.726	2.661	2.576	2.471	2.344
o L	12.6	2.810	2.749	2.669	2.567	2.445
= Average Depth of Trench from Subgrade to Invert of Pipe	12.8	2.894	2.838	2.761	2.664	2.547
ă	13.0	2.978	2.926	2.854	2.761	2.648
ge	13.2	3.062	3.014	2.947	2.858	2.749
er,	13.4	3.146	3.102	3.039	2.955	2.850
A A	13.6	3.230	3.191	3.132	3.052	2.951
	13.8	3.314	3.279	3.224	3.149	3.053
D(#)	14.0	3.398	3.367	3.317	3.246	3.154
	14.2	3.482	3.455	3.410	3.343	3.255
	14.4	3.566	3.544	3.502	3.440	3.357
	14.6	3.649	3.632	3.595	3.537	3.458
	14.8	3.733	3.720	3.687	3.634	3.559
	15.0	3.817	3.809	3.780	3.730	3.660
	15.2	3.901	3.897	3.873	3.827	3.761
	15.4	3.985	3.985	3.965	3.924	3.863
	15.6	4.069	4.074	4.058	4.021	3.964
	15.8	4.153	4.162	4.150	4.118	4.065
	16.0	4.237	4.250	4.243	4.215	4.166
	16.2	4.321	4.338	4.335	4.312	4.268
	16.4	4.405	4.426	4.428	4.409	4.369
	16.6	4.488	4.515	4.521	4.506	4.470
	16.8	4.572	4.603	4.613	4.603	4.571
	17.0	4.656	4.691	4.706	4.699	4.672
	17.2	4.740	4.780	4.798	4.796	4.774
	17.4	4.824	4.868	4.891	4.893	4.875
	17.6	4.908	4.956	4.091	4.990	4.976
For each	additional 0.2' depth:	4.000	4.000	+.00 1	4.000	4.970
i or caoir		+0.0839	+0.0883	+0.0926	+0.0969	+0.1012
		10.0009	10.0003	10.0320	10.0000	10.1012

TRENCH BACKFILL TABLE FOR ELLIPTICAL PIPES, ENGLISH

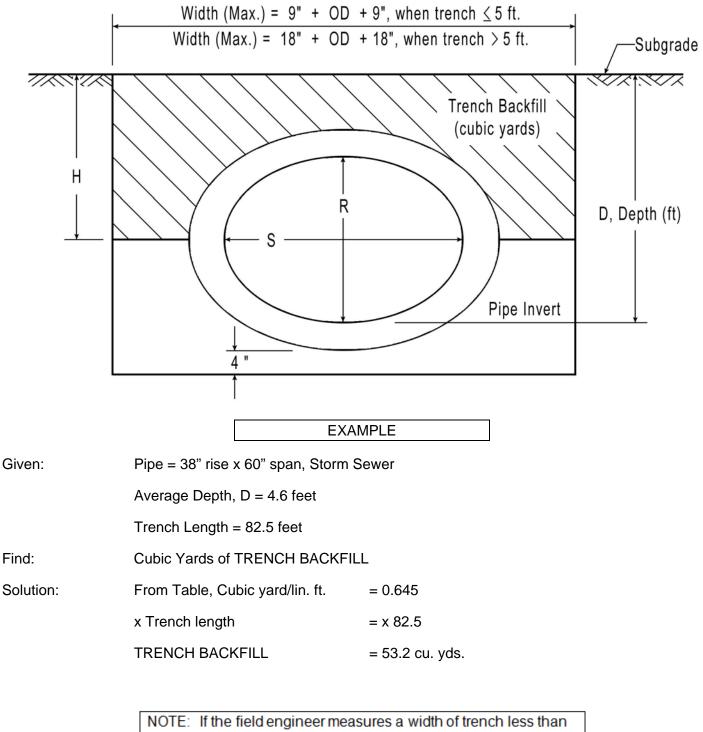

NOTE: If the field engineer measures a width of trench less than the maximum permitted, the values included herein will be of no value. The actual volume of TRENCH BACKFILL used will therefore have to be calculated using the following formula:

Cubic Yards = $\left[(H'xW') - \left(\frac{Pipe \ End \ Area}{2} \right) \right] x \ L' \ x \ 1/27$

VOLUME OF TRENCH BACKFILL (CU. YDS) PER LINEAL FOOT OF ELLIPTICAL STORM SEWER PIPE

E	q. Round Size, in.	18	24	27	30	33	36	39	42
	Rise, in.	14	19	22	24	27	29	32	34
	Span, in.	23	30	34	38	42	45	49	53
	Wall Thickness, in.	2.75	3.25	3.50	3.75	3.75	4.50	4.75	5.00
Pip	e End Area, sq. ft.	3.03	5.08	6.49	7.82	9.31	11.19	13.24	15.12
	1.4	0.061							
	1.6	0.090							
_	1.8	0.118							
	2.0	0.147	0.109						
	2.2	0.176	0.143	0.114					
	2.4	0.205	0.177	0.150	0.130				
	2.6	0.233	0.210	0.186	0.169	0.135			
8	2.8	0.262	0.244	0.223	0.208	0.176	0.146		
Ē	3.0	0.291	0.277	0.259	0.247	0.218	0.191		
to	3.2	0.319	0.311	0.296	0.286	0.260	0.235	0.196	
= Average Depth of Trench from Subgrade to Invert of Pipe	3.4	0.348	0.345	0.332	0.326	0.301	0.280	0.243	0.216
o II	3.6	0.377	0.378	0.369	0.365	0.343	0.324	0.290	0.266
e t	3.8	0.406	0.412	0.405	0.404	0.385	0.369	0.337	0.316
Irad	4.0	0.434	0.446	0.441	0.443	0.426	0.413	0.384	0.366
	4.2	0.463	0.479	0.478	0.482	0.468	0.458	0.432	0.416
S S	4.4	0.492	0.713	0.708	0.710	0.692	0.679	0.649	0.632
	4.6	0.743	0.758	0.755	0.761	0.745	0.735	0.708	0.693
ц.	4.8	0.783	0.803	0.803	0.811	0.797	0.790	0.766	0.754
Ģ	5.0	0.823	0.848	0.805	0.861	0.850	0.846	0.824	0.815
É T	5.2	0.863	0.892	0.898	0.912	0.903	0.902	0.883	0.876
o fi	5.4	0.903	0.937	0.945	0.962	0.956	0.957	0.941	0.937
ept	5.6	0.943	0.982	0.993	1.012	1.008	1.013	0.999	0.998
О	5.8	0.982	1.027	1.040	1.063	1.061	1.068	1.058	1.059
Lag	6.0	1.022	1.071	1.088	1.113	1.114	1.124	1.116	1.120
A	6.2	1.062	1.116	1.136	1.163	1.167	1.179	1.174	1.182
	6.4	1.102	1.161	1.183	1.214	1.220	1.235	1.233	1.243
D E	6.6	1.142	1.206	1.231	1.264	1.272	1.290	1.291	1.304
	6.8	1.181	1.250	1.278	1.314	1.325	1.346	1.349	1.365
	7.0	1.221	1.295	1.326	1.364	1.378	1.402	1.408	1.426
	7.2	1.261	1.340	1.373	1.415	1.431	1.457	1.466	1.487
	7.4	1.301	1.385	1.421	1.465	1.483	1.513	1.524	1.548
	7.6	1.341	1.429	1.468	1.515	1.536	1.568	1.583	1.609
	7.8	1.381	1.474	1.516	1.566	1.589	1.624	1.641	1.670
	8.0	1.420	1.519	1.563	1.616	1.642	1.679	1.699	1.732
	8.2	1.460	1.564	1.611	1.666	1.695	1.735	1.758	1.793
	8.4	1.500	1.608	1.658	1.717	1.747	1.790	1.816	1.854
	8.6	1.540	1.653	1.706	1.767	1.800	1.846	1.874	1.915
	8.8	1.580	1.698	1.753	1.817	1.853	1.902	1.933	1.976
	9.0	1.619	1.743	1.801	1.868	1.906	1.957	1.991	2.037
For eac	ch additional 0.2 ft.	depth							
		+0.040	+0.045	+0.048	+0.050	+0.053	+0.056	+0.058	+0.061


VOLUME OF TRENCH BACKFILL (CU. YDS) PER LINEAL FOOT OF ELLIPTICAL STORM SEWER PIPE

Eq	. Round Size, in.	48	54	60	66	72	78	84	90
	Rise, in.	38	43	48	53	58	63	68	72
14	Span, in.	60	68	76	83	91	98	106	113
	/all Thickness, in. End Area, sq. ft.	5.50 18.98	6.00 24.00	6.50 29.61	7.00 35.45	7.50 42.20	8.00 49.12	8.50 57.02	9.00 64.30
Fipe	3.8	0.258	24.00	29.01	35.45	42.20	49.12	57.02	04.30
	4.0	0.200							
	4.2	0.367	0.418						
	4.4	0.579	0.489						
	4.6	0.645	0.561	0.455					
<u>8</u>	4.8	0.711	0.633	0.532					
D(ft) = Average Depth of Trench from Subgrade to Invert of Pipe	5.0	0.777	0.704	0.609	0.490				
ŭ	5.2	0.843	0.776	0.686	0.572				
Ž	5.4	0.909	0.847	0.763	0.654				
9	5.6	0.975	0.919	0.841	0.736	0.614			
ade	5.8	1.041	0.991	0.918	0.818	0.701			
2DC	6.0	1.107	1.062	0.995	0.900	0.789	0.653		
Sut	6.2	1.173	1.134	1.072	0.982	0.877	0.745		
E	6.4	1.239	1.205	1.149	1.064	0.964	0.838	0.694	
ے ل	6.6	1.305	1.277	1.226	1.146	1.052	0.931	0.792	
and a	6.8	1.371	1.349	1.304	1.228	1.140	1.023	0.891	0.768
Це	7.0	1.437	1.420	1.381	1.311	1.227	1.116	0.989	0.871
Q	7.2	1.503	1.492	1.458	1.393	1.315	1.208	1.087	0.974
ept	7.4	1.570	1.564	1.535	1.475	1.402	1.301	1.185	1.077
ă	7.6	1.636	1.635	1.612	1.557	1.490	1.394	1.283	1.180
age	7.8	1.702	1.707	1.689	1.639	1.578	1.486	1.381	1.283
Ver	8.0	1.768	1.778	1.766	1.721	1.665	1.579	1.480	1.386
A	8.2	1.834	1.850	1.844	1.803	1.753	1.671	1.578	1.489
ŧ	8.4	1.900	1.922	1.921	1.885	1.841	1.764	1.676	1.593
	8.6	1.966	1.993	1.998	1.967	1.928	1.857	1.774	1.696
	8.8	2.032	2.065	2.075	2.049	2.016	1.949	1.872	1.799
	9.0	2.098	2.136	2.152	2.132	2.104	2.042	1.970	1.902
	9.2	2.164	2.208	2.229	2.214	2.191	2.134	2.068	2.005
	6.4	2.230	2.280	2.307	2.296	2.279	2.227	2.167	2.108
	9.6	2.296	2.351	2.384	2.378	2.367	2.320	2.265	2.211
	9.8	2.362	2.423	2.461	2.460	2.454	2.412	2.363	2.314
	10.0	2.428	2.494	2.538	2.542	2.542	2.505	2.461	2.417
	10.2	2.494	2.566	2.615	2.624	2.630	2.597	2.559	2.520
_	10.4	2.560	2.638	2.692	2.706	2.717	2.690	2.657	2.623
	10.6	2.626	2.709	2.770	2.788	2.805	2.783	2.755	2.726
	10.8	2.692	2.781	2.847	2.870	2.893	2.875	2.854	2.830
	11.0	2.758	2.852	2.924	2.953	2.980	2.968	2.952	2.933
	11.2	2.824	2.924	3.001	3.035	3.068	3.060	3.050	3.036
For sea	11.4	2.891	2.996	3.078	3.117	3.156	3.153	3.148	3.139
For eac	h additional 0.2 ft.		10.070	10.077	10.000	10.000	10.000	10.000	10.400
		+0.066	+0.072	+0.077	+0.082	+0.088	+0.093	+0.098	+0.103

VOLUME OF TRENCH BACKFILL (CU. YDS) PER LINEAL FOOT OF ELLIPTICAL STORM SEWER PIPE

Eq. Round Size, in.	96	102	108	114	120	132	144
Rise, in.	77	82	87	92	97	106	116
Span, in.	121	128	136	143	151	166	180
Wall Thickness, in.	9.50	9.75	10.00	10.50	11.00	12.00	13.00
Pipe End Area, sq. ft.	73.30	81.66	91.04	101.08	112.28	134.72	159.55
7.2	0.811				_		_
7.4	0.919						
7.6	1.028	0.070			_		_
7.8	1.137	0.970					
8.0	1.245	1.084	4 005				_
8.2	1.354	1.197	1.025				
8 .4	1.463	1.310	1.144				
5 8.6	1.517	1.423	1.262	1.071			
to 8.8	1.680	1.537	1.381	1.194			
<u> </u>	1.789	1.650	1.499	1.318	1.119		
9 .2	1.897	1.763	1.618	1.441	1.248		
8.4 8.6 9.0 9.2 9.2 9.4 9.6 9.6 9.8 10.0 10.2 10.4 10.4 10.6 10.8 11.2 9.6 10.8 11.2 11.4 11.6 11.8 11.6	2.006	1.877	1.736	1.564	1.377		
9.6	2.115	1.990	1.855	1.688	1.506		
8.9 Set	2.223	2.103	1.973	1.811	1.635		
E 10.0	2.332	2.216	2.092	1.935	1.764	1.400	
9 10.2	2.440	2.330	2.210	2.058	1.893	1.539	
10.4	2.549	2.443	2.329	2.182	2.022	1.679	
2 10.6	2.658	2.556	2.447	2.305	2.151	1.818	4 = 0.0
b 10.8	2.766	2.669	2.566	2.429	2.280	1.958	1.502
11.0	2.875	2.783	2.684	2.552	2.409	2.097	1.651
8 11.2	2.984	2.896	2.803	2.676	2.538	2.237	1.801
9 11.4	3.092	3.009	2.921	2.799	2.667	2.376	1.950
11.6	3.201	3.123	3.040	2.922	2.796	2.516	2.100
	3.310	3.236	3.159	3.046	2.925	2.655	2.249
	3.418	3.349	3.277	3.169	3.054	2.795	2.398
	3.527	3.462	3.396	3.293	3.183	2.934	2.548
12.4	3.636	3.576	3.514	3.416	3.312	3.074	2.697
12.6	3.744	3.689	3.633	3.540	3.441	3.213	2.847
12.8	3.853	3.802	3.751	3.663	3.570	3.353	2.996
13.0	3.961	3.915	3.870	3.787	3.699	3.492	3.145
13.2	4.070	4.029	3.988	3.910	3.828	3.632	3.295
13.4	4.179	4.142	4.107	4.034	3.957	3.771	3.444
13.6	4.267	4.255	4.225	4.157	4.086	3.911	3.593
13.8	4.396	4.369	4.344	4.280	4.215	4.050	3.743
14.0	4.505	4.482	4.462	4.404	4.344	4.190	3.892
14.2	4.613	4.595	4.581	4.527	4.473	4.329	4.042
14.4	4.722	4.708	4.699	4.651	4.602	4.469	4.191
14.6	4.831	4.822	4.818	4.774	4.731	4.608	4.340
14.8	4.939	4.935	4.936	4.898	4.860	4.748	4.490
For each additional 0.2 ft.							
	+0.109	+0.113	+0.119	+0.123	+0.129	+0.140	+0.149

TRENCH BACKFILL FOR ARCH PIPE, ENGLISH

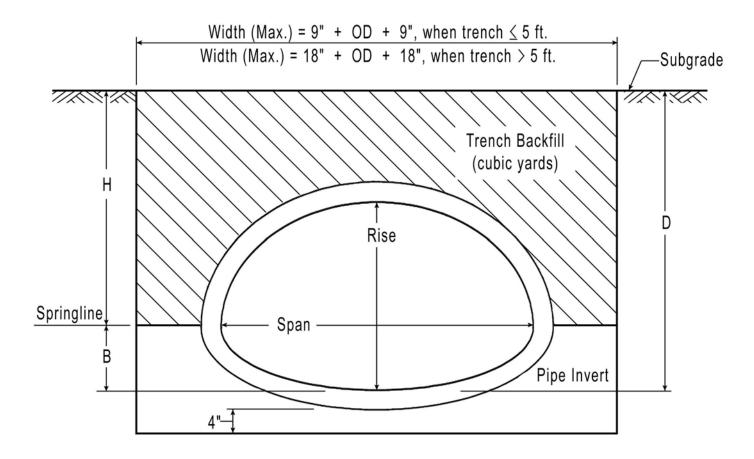

- W = Width of Trench (ft.)
- D = Depth from Subgrade to Pipe Invert (ft.)
- H = Height of Trench Backfill Limits (ft) = (D B)
- B = Distance from Pipe Invert to Springline (ft.) (See Table)
- L = Length of Trench (ft.)
- A = End Area of Pipe above Springline (Sq. ft.) (See Table)

Volume (Cu. Yds.) = $[(H \times W) - A] \times L \times 1/27$

This formula should be used by the designer or field engineer to determine the volume of TRENCH BACKFILL that should be paid for when backfilling storm sewer trenches utilizing reinforced concrete ARCH PIPE. Maximum trench widths permitted by Article 550.04 of the Standard Specifications are used.

Equivalent Round Size (in.)	Rise (in.)	Span (in.)	Wall Thickness (in.)	End Area Above Springline (sq. ft.)	B (ft.)
15	11.00	18.00	2.25	1.08	0.39
18	13.50	22.00	2.50	1.42	0.50
21	15.50	26.00	2.75	1.94	0.52
24	18.00	28.50	3.00	2.77	0.49
27	22.50	36.25	3.50	4.20	0.64
30	22.50	36.25	3.50	4.20	0.64
36	26.63	43.75	4.00	6.04	0.71
42	31.31	51.13	4.50	8.20	0.84
48	36.00	58.50	5.00	10.67	0.97
54	40.00	65.00	5.50	13.07	1.08
60	45.00	73.00	6.00	16.34	1.22
66	54.00	88.00	7.00	23.76	1.42
72	54.00	88.00	7.00	23.76	1.42
84	62.00	102.00	8.00	32.10	1.55
90	72.00	115.00	8.50	39.65	1.98
96	77.25	122.00	9.00	46.07	2.03
108	87.13	138.00	10.00	59.07	2.24
120	96.88	154.00	11.00	71.05	2.61
132	106.50	168.75	10.00	72.95	3.79

EXAMPLE

Given: Pipe = 30" Round size eq., rise = 22.5", span = 36.25"

Average Depth, D = 4.7 feet

Trench Length = 82.3 feet

Width, W = 6.6 feet

Find: Cubic Yards of TRENCH BACKFILL

Solution: From Table, End Area, A = 4.20 sq. ft.

B = 0.64 ft.


Pay Height, H = D - B = 4.70 - 0.64 = 4.06 ft

Volume = $[(H \times W) - A] \times L \times 1/27$

= [(4.06) (6.6) - 4.20] (82.3) (1/27)

TRENCH BACKFILL = 68.9 cu. yds.

TRENCH BACKFILL FOR CIRCULAR PIPES, METRIC

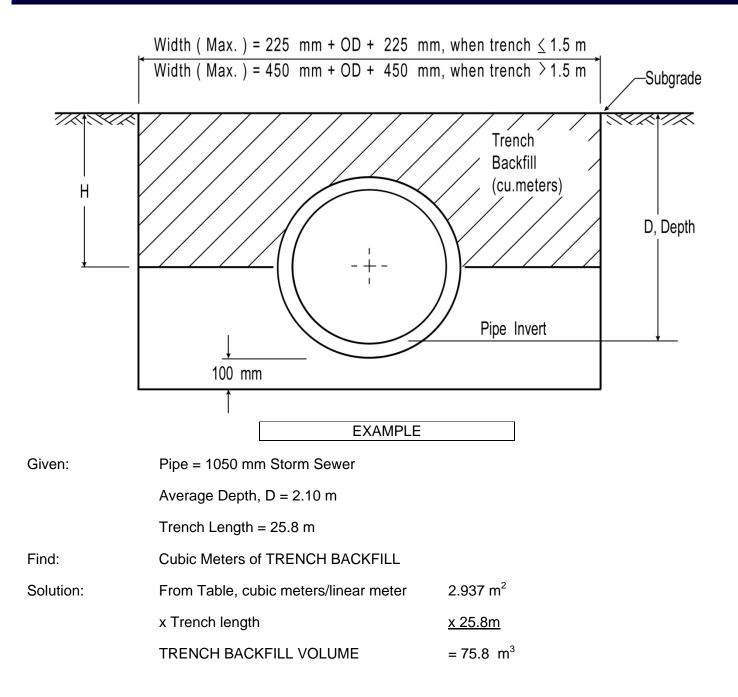

Note: If the field engineer measures a width of trench less than the maximum permitted, the values included herein will be of no value. The actual volume of TRENCH BACKFILL used will therefore have to be calculated using the following formula:

Cubic Meters = [(H x W) - (Pipe End Area)/2] x L


Nomina	ulated volumes ar I Diameter (mm)	200 (8")	250 (10")	300 (12")	375 (15")	450 (18")	525 (21")
	hickness (mm)	42	47	51	57	64	70
End A	rea (sq meters)	0.065	0.095	0.130	0.193	0.268	0.356
	0.50	0.261	0.250	0.233	0.196		
	0.55	0.298	0.290	0.276	0.243	0.198	
	0.60	0.335	0.330	0.318	0.291	0.250	
	0.65	0.372	0.370	0.361	0.338	0.302	0.253
-	0.70	0.409	0.409	0.404	0.385	0.353	0.309
e	0.75	0.446	0.449	0.447	0.433	0.405	0.365
ä	0.80	0.483	0.489	0.490	0.480	0.457	0.421
Invert of Pipe	0.85	0.520	0.529	0.533	0.527	0.509	0.477
ы	0.90	0.557	0.569	0.575	0.574	0.560	0.533
2	0.95	0.593	0.609	0.618	0.622	0.612	0.589
	1.00	0.630	0.649	0.661	0.669	0.664	0.646
e P	1.05	0.667	0.688	0.704	0.716	0.715	0.702
ğ	1.10	0.704	0.728	0.747	0.763	0.767	0.758
ĝ	1.15	0.741	0.768	0.789	0.811	0.819	0.814
Su	1.20	0.778	0.808	0.832	0.858	0.871	0.870
= Average Depth of Trench from Subgrade to	1.25	0.815	0.848	0.875	0.905	0.922	0.926
f	1.30	0.852	0.888	0.918	0.952	0.974	0.983
ß	1.35	0.889	0.928	1.619	1.637	1.642	1.635
Ğ	1.40	1.640	1.668	1.690	1.712	1.722	1.718
1	1.45	1.704	1.735	1.760	1.787	1.801	1.802
o	1.50	1.768	1.802	1.830	1.862	1.880	1.886
f	1.55	1.833	1.870	1.901	1.937	1.959	1.969
ð	1.60	1.897	1.937	1.901	2.011	2.039	2.053
е							
ag	1.65	1.962	2.004	2.041	2.086	2.118	2.136
e	1.70	2.026	2.072	2.112	2.161	2.197	2.220
ě.	1.75	2.090	2.139	2.182	2.236	2.276	2.304
	1.80	2.155	2.206	2.252	2.310	2.355	2.387
D(m)	1.85	2.219	2.274	2.323	2.385	2.435	2.471
	1.90	2.284	2.341	2.393	2.460	2.514	2.555
	1.95	2.348	2.409	2.463	2.535	2.593	2.638
	2.00	2.412	2.476	2.534	2.609	2.672	2.722
	2.05	2.477	2.543	2.604	2.684	2.751	2.806
	2.10	2.541	2.611	2.674	2.759	2.831	2.889
	2.15	2.606	2.678	2.745	2.834	2.910	2.973
	2.20	2.670	2.745	2.815	2.908	2.989	3.057
	2.25	2.734	2.813	2.885	2.983	3.068	3.140
	2.30	2.799	2.880	2.956	3.058	3.147	3.224
	2.35	2.863	2.947	3.026	3.133	3.227	3.308
	2.40	2.927	3.015	3.096	3.208	3.306	3.391
	2.45	2.992	3.082	3.166	3.282	3.385	3.475
	2.50	3.056	3.149	3.237	3.357	3.464	3.559
	2.55	3.121	3.217	3.307	3.432	3.544	3.642
	2.60	3.185	3.284	3.377	3.507	3.623	3.726
	2.65	3.249	3.351	3.448	3.581	3.702	3.810
	2.70	3.314	3.419	3.518	3.656	3.781	3.893
	2.75	3.378	3.486	3.588	3.731	3.860	3.977
	2.80	3.443	3.554	3.659	3.806	3.940	4.061
	2.85	3.507	3.621	3.729	3.880	4.019	4.144
	2.90	3.571	3.688	3.799	3.955	4.098	4.228
	2.95	3.636	3.756	3.870	4.030	4.030	4.312
	3.00	3.700	3.823	3.940	4.105	4.177	4.395
			0.0/0	3.940	4.105	4.200	4.595

	alculated volumes are ba minal Dia. (mm)	600 (24")	675 (27")	750 (30")	825 (33")	900 (36")	1050 (42
Wall	Thickness (mm)	76	83	89	95	102	1
End	Area (sq meters)	0.456	0.569	0.694	0.831	0.981	1.3
	0.70	0.251					
	0.75	0.312					
	0.80	0.372	0.310				
	0.85	0.433	0.375				
Ð	0.90	0.493	0.440	0.374			
Subgrade to Invert of Pipe	0.95	0.554	0.505	0.444	0.369		
je Je	1.00	0.615	0.570	0.513	0.443		
Ť	1.05	0.675	0.636	0.583	0.517	0.439	
Ž	1.10	0.736	0.701	0.652	0.591	0.517	
2	1.15	0.796	0.766	0.722	0.665	0.596	
<u>e</u>	1.20	0.857	0.831	0.791	0.739	0.674	0.5
la	1.25	0.918	0.896	0.861	0.813	0.752	0.5
ਬੂ	1.30	0.978	0.961	0.930	0.887	1.294	1.1
ಸ್	1.35	1.614	1.580	1.533	1.473	1.400	1.2
from	1.40	1.702	1.672	1.630	1.574	1.506	1.3
Ē	1.45	1.790	1.765	1.727	1.676	1.612	1.4
헐	1.50	1.878	1.857	1.824	1.777	1.718	1.5
ē	1.55	1.966	1.950	1.921	1.879	1.824	1.6
, e	1.60	2.054	2.042	2.018	1.980	1.930	1.7
÷.	1.65	2.142	2.135	2.115	2.082	2.035	1.9
D(m) = Average Depth of Trench	1.70	2.230	2.228	2.212	2.183	2.141	2.0
Ъ	1.75	2.318	2.320	2.309	2.284	2.247	2.1
gg	1.80	2.407	2.413	2.406	2.386	2.353	2.2
N	1.85	2.495	2.505	2.503	2.487	2.459	2.3
≪	1.90	2.583	2.598	2.600	2.589	2.565	2.4
Ê	1.95	2.671	2.690	2.697	2.690	2.671	2.5
ፚ	2.00	2.759	2.783	2.794	2.792	2.777	2.7
	2.05	2.847	2.875	2.891	2.893	2.882	2.8
	2.10	2.935	2.968	2.988	2.994	2.988	2.9
	2.15	3.023	3.060	3.085	3.096	3.094	3.0
	2.20	3.111	3.153	3.182	3.197	3.200	3.1
	2.25	3.199	3.246	3.279	3.299	3.306	3.2 3.3
	2.30	3.288	3.338	3.376	3.400	3.412	3.3
	2.35	3.376 3.464	3.431	3.473	3.502	3.518 3.624	
	2.40 2.45	3.464	3.523 3.616	3.570 3.667	3.603 3.705	3.624	3.6 3.7
	2.43	3.640	3.708	3.764	3.806	3.835	3.8
	2.55	3.728	3.801	3.861	3.907	3.941	3.9
	2.60	3.816	3.893	3.958	4.009	4.047	4.0
	2.65	3.904	3.986	4.055	4.110	4.153	4.1
	2.70	3.992	4.078	4.152	4.212	4.155	4.3
	2.75	4.080	4.171	4.249	4.313	4.365	4.4
	2.80	4.169	4.264	4.346	4.415	4.471	4.5
	2.85	4.257	4.356	4.443	4.516	4.577	4.6
	2.90	4.345	4.449	4.540	4.617	4.682	4.7
	2.95	4.433	4.541	4.637	4.719	4.788	4.8
	3.00	4.521	4.634	4.733	4.719	4.788	4.0 5.0
	3.05	4.609	4.034	4.733	4.820	5.000	5.0
	3.10	4.697	4.720	4.830	5.023	5.106	5.2
	3.15	4.785	4.819	5.024	5.125	5.212	5.3
	3.20	4.785	5.004	5.121	5.226	5.318	5.4
	5.20	4.073	5.004	J. 12 I	5.220	0.010	5.4

Nominal Dia. (mm) Vall Thickness (mm) Ind Area (sq meters)	1200 (48") 127 1.705	1350 (54") 140 2.141	1500 (60") 152 2.627	1650 (66) 165 3.162	1800 (72") 178 3.748	1950 (78") 191 4.383
1.35	0.979	0.000	0.000	0.000	0.000	0.000
1.40	1.103	0.000	0.000	0.000	0.000	0.000
1.45	1.226	0.000	0.000	0.000	0.000	0.000
1.50	1.350	0.000	0.000	0.000	0.000	0.000
1.55	1.474	1.221	0.000	0.000	0.000	0.000
1.60	1.597	1.353	0.000	0.000	0.000	0.000
1.65	1.721	1.486	0.000	0.000	0.000	0.000
ed 1.60 1.65 i 1.70 1.75 1.80	1.844	1.618	1.340	0.000	0.000	0.000
1 .75	1.968	1.751	1.481	0.000	0.000	0.000
É 1.80	2.092	1.883	1.623	0.000	0.000	0.000
9 1.85	2.215	2.016	1.764	1.461	0.000	0.000
9 1.90	2.339	2.148	1.906	1.611	0.000	0.000
1 .95	2.463	2.281	2.047	1.762	0.000	0.000
9 1.85 9 1.90 1 .95 2.00 2 .05 2.15 2 .20 2.25 2 .30 2.30	2.586	2.414	2.189	1.912	0.000	0.000
S 2.05	2.710	2.546	2.330	2.062	1.742	0.000
5 2.10	2.834	2.679	2.472	2.213	1.902	0.000
2 .15	2.957	2.811	2.613	2.363	2.061	0.000
2.20	3.081	2.944	2.754	2.513	2.220	1.875
2.25	3.205	3.076	2.896	2.664	2.379	2.043
6 2.30	3.328	3.209	3.037	2.814	2.539	2.211
£ 2.35	3.452	3.341	3.179	2.964	2.698	2.379
2.40	3.576	3.474	3.320	3.115	2.857	2.547
a 2.45	3.699	3.606	3.462	3.265	3.016	2.716
2.50	3.823	3.739	3.603	3.415	3.175	2.884
2.55	3.947	3.872	3.745	3.566	3.335	3.052
 2.35 2.40 2.45 2.50 2.55 2.60 	4.070	4.004	3.886	3.716	3.494	3.220
2 .65	4.070	4.004	4.027	3.866	3.653	3.388
_	4.318	4.269	4.169	4.017	3.812	3.556
2.75	4.441	4.402	4.310	4.167	3.971	3.724
2.80	4.565	4.534	4.452	4.317	4.131	3.892
2.85	4.689	4.667	4.593	4.467	4.290	4.060
2.90	4.812	4.799	4.735	4.618	4.449	4.229
2.95	4.936	4.932	4.876	4.768	4.608	4.397
3.00	5.060	5.065	5.017	4.918	4.768	4.565
3.05	5.183	5.197	5.159	5.069	4.927	4.733
3.10	5.307	5.330	5.300	5.219	5.086	4.901
3.15	5.431	5.462	5.442	5.369	5.245	5.069
3.20	5.554	5.595	5.583	5.520	5.404	5.237
3.25	5.678	5.727	5.725	5.670	5.564	5.405
3.30	5.802	5.860	5.866	5.820	5.723	5.573
3.35	5.925	5.992	6.008	5.971	5.882	5.742
3.40	6.049	6.125	6.149	6.121	6.041	5.910
3.45	6.173	6.257	6.290	6.271	6.201	6.078
3.50	6.296	6.390	6.432	6.422	6.360	6.246
3.55	6.420	6.523	6.573	6.572	6.519	6.414
3.60	6.544	6.655	6.715	6.722	6.678	6.582
3.65	6.667	6.788	6.856	6.873	6.837	6.750
3.70	6.791	6.920	6.998	7.023	6.997	6.918
3.75	6.915	7.053	7.139	7.023	7.156	7.086
3.80	7.038	7.055	7.139	7.173	7.150	7.080
5.00				7.324	7.315	7.255
3.85	7.162	7.318	7.422			

2700 (10 2	2550 (102") 241	2400 (96") 229	2250 (90") 216	based on the use of stan 2100 (84") 203	ninal Dia. (mm) Thickness (mm)	Nor
8.3	7.419	6.585	5.801	5.067	Area (sq meters)	
				2.009	2.35	
				2.186	2.40	
				2.363	2.45	
				2.540	2.50	
			2.330	2.717	2.55	
			2.516	2.894	2.60	
			2.702	3.071	2.65	Φ
		2.476	2.888	3.248	2.70	ġ
		2.671	3.074	3.425	2.75	of
		2.866	3.260	3.602	2.80	ま
	2.623	3.060	3.446	3.779	2.85	ž
	2.827	3.255	3.632	3.956	2.90	0
						let
0.7	3.030	3.450	3.817	4.133	2.95	D(m) = Average Depth of Trench from Subgrade to Invert of Pipe
2.7	3.234	3.645	4.003	4.310	3.00	bq
2.9	3.438	3.839	4.189	4.487	3.05	S
3.1	3.642	4.034	4.375	4.664	3.10	E
3.4	3.845	4.229	4.561	4.841	3.15	ц <u>е</u>
3.6	4.049	4.424	4.747	5.018	3.20	ъ Б
3.8	4.253	4.619	4.933	5.195	3.25	Je le
4.0	4.456	4.813	5.119	5.372	3.30	Ę
4.2	4.660	5.008	5.305	5.549	3.35	ê
4.4	4.864	5.203	5.490	5.726	3.40	<u>b</u>
4.6	5.067	5.398	5.676	5.903	3.45	ď
4.8	5.271	5.592	5.862	6.080	3.50	e
5.1	5.475	5.787	6.048	6.257	3.55	ela
5.3	5.678	5.982	6.234	6.434	3.60	Å
5.5	5.882	6.177	6.420	6.611	3.65	ī
5.7	6.086	6.372	6.606	6.788	3.70	Ξ.
5.9	6.289	6.566	6.792	6.965	3.75	ă
6.1	6.493	6.761	6.978	7.142	3.80	
6.3	6.697	6.956	7.163	7.319	3.85	
6.5	6.900	7.151	7.349	7.496	3.90	
6.8	7.104	7.346	7.535	7.673	3.95	
7.0	7.308	7.540	7.721	7.850	4.00	
7.2	7.511	7.735	7.907	8.027	4.05	
7.4	7.715	7.930	8.093	8.204	4.10	
7.6	7.919	8.125	8.279	8.381	4.15	
7.8	8.122	8.319	8.465	8.558	4.20	
8.0	8.326	8.514	8.651	8.735	4.25	
8.2	8.530	8.709	8.836	8.912	4.30	
8.5	8.733	8.904	9.022	9.089	4.35	
8.7	8.937	9.099	9.208	9.266	4.40	
8.9	9.141	9.293	9.394	9.443	4.45	
9.1	9.344	9.488	9.580	9.620	4.50	
9.3	9.548	9.683	9.766	9.797	4.55	
9.5	9.752	9.878	9.952	9.974	4.60	
9.7	9.955	10.072	10.138	10.151	4.65	
9.9	10.159	10.267	10.324	10.328	4.70	
10.2	10.363	10.462	10.509	10.505	4.75	
10.4 10.6	10.566	10.657	10.695	10.682	4.80	
	10.770	10.852	10.881	10.859	4.85	

TRENCH BACKFILL TABLE FOR ELLIPTICAL PIPE, METRIC

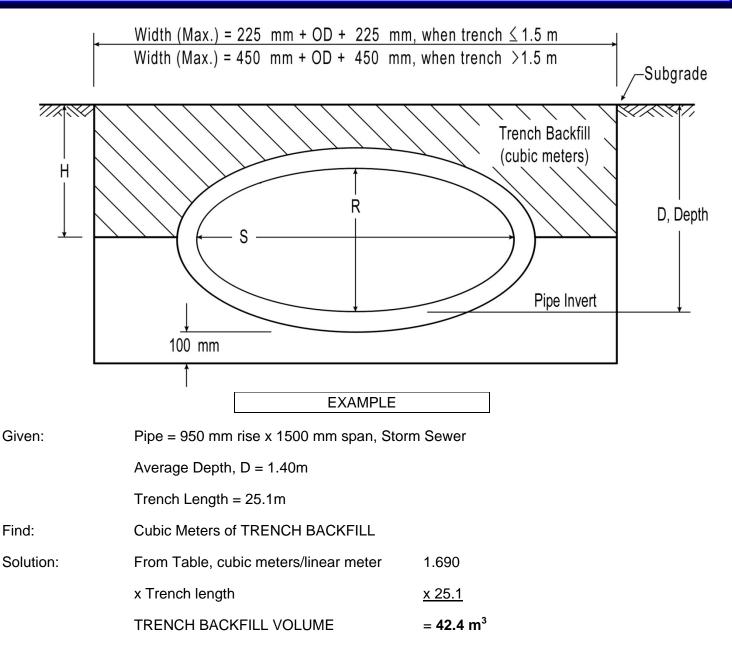

Note: If the Field Engineer measures a width of trench less than the maximum permitted, the values included herein will be of no value. The actual volume of TRENCH BACKFILL used will therefore have to be calculated using the following formula:

Cubic Meters = [(H x W) - (Pipe End Area)/2] x L

VOLUME OF TRENCH BACKFILL (CU. METERS) PER LINEAL METER OF ELLIPTICAL STORM SEWER PIPE


Note: The calculated					Dipes that mee			nav items
q. Round Size (mm)	450 (18")	600 (24")	675 (27")	750 (30")	825 (33")	900 (36")	975 (39")	1050 (42
Nominal Rise (mm)	350 (14")	475 (19")	550 (22")	600 (24")	675 (27")	725 (29")	800 (32")	850 (34
Nominal Span (mm)	575 (23")	750 (30″)	850 (34")	950 (38")	1050 (42")́	1125 (45")	1225 (49")	1325 (53
Vall Thickness (mm)	70	83	89	95	95	114	121	1:
nd Area (sq meters)	0.28	0.47	0.60	0.73	0.87	1.04	1.23	1.
0.50	0.237							
0.55	0.296							
0.60	0.355	0.258						
0.65	0.414	0.327	0.251					
0.70	0.472	0.396	0.326					
0.75	0.531	0.465	0.401	0.352				
5 0.80	0.590	0.534	0.475	0.432	0.348			
0.85	0.648	0.602	0.550	0.512	0.433			
0.90	0.707	0.671	0.624	0.593	0.518	0.449		
0.95	0.766	0.740	0.699	0.673	0.604	0.540	0.437	
1 .00	0.824	0.809	0.773	0.753	0.689	0.631	0.534	0.4
a 1.05	0.883	0.878	0.848	0.833	0.775	0.722	0.631	0.5
1 .10	0.942	0.947	0.923	0.914	0.860	0.813	0.728	0.6
1.15	1.000	1.016	0.997	0.994	0.945	0.904	0.824	0.7
1.20	1.059	1.084	1.072	1.074	1.031	0.995	0.921	0.8
5 1.25	1.118	1.153	1.146	1.155	1.116	1.086	1.018	0.9
1.30	1.177	1.222	1.221	1.235	1.201	1.690	1.606	1.5
1.35	1.880	1.901	1.884	1.890	1.841	1.808	1.731	1.6
1.40	1.966	1.997	1.986	1.998	1.954	1.927	1.855	1.8
1.45	2.052	2.093	2.088	2.106	2.066	2.045	1.979	1.9
1.50	2.139	2.190	2.190	2.213	2.179	2.164	2.104	2.0
0.70 0.75 0.80 0.85 0.90 0.95 1.00 1.05 1.10 1.15 1.20 1.25 1.30 1.35 1.40 1.45 1.55 1.60	2.225	2.286	2.293	2.321	2.292	2.283	2.228	2.2
1.60	2.311	2.383	2.395	2.429	2.405	2.401	2.352	2.3
1.65	2.397	2.479	2.497	2.537	2.518	2.520	2.476	2.4
1.65 1.70 1.75 1.80 1.85 1.90	2.483	2.575	2.599	2.645	2.631	2.638	2.601	2.5
1.75	2.570	2.672	2.701	2.752	2.744	2.757	2.725	2.7
1.80	2.656	2.768	2.803	2.860	2.856	2.876	2.849	2.8
1.85	2.742	2.864	2.905	2.968	2.969	2.994	2.974	2.9
1.90	2.828	2.961	3.007	3.076	3.082	3.113	3.098	3.1
1.95	2.914	3.057	3.109	3.183	3.195	3.231	3.222	3.2
2.00	3.000	3.153	3.211	3.291	3.308	3.350	3.346	3.3
2.05	3.087	3.250	3.313	3.399	3.421	3.468	3.471	3.5
2.10	3.173	3.346	3.415	3.507	3.534	3.587	3.595	3.6
2.15	3.259	3.442	3.517	3.615	3.647	3.706	3.719	3.7
2.20	3.345	3.539	3.619	3.722	3.759	3.824	3.844	3.8
2.25	3.431	3.635	3.722	3.830	3.872	3.943	3.968	4.(
2.30	3.518	3.732	3.824	3.938	3.985	4.061	4.092	4.1
2.35	3.604	3.828	3.926	4.046	4.098	4.180	4.217	4.2
2.40	3.690	3.924	4.028	4.154	4.211	4.298	4.341	4.4
2.45	3.776	4.021	4.130	4.261	4.324	4.417	4.465	4.5
2.50	3.862	4.117	4.232	4.369	4.437	4.536	4.589	4.6
2.55	3.949	4.213	4.334	4.477	4.549	4.654	4.714	4.8
2.60	4.035	4.310	4.436	4.585	4.662	4.773	4.838	4.9
2.65	4.121	4.406	4.538	4.692	4.775	4.891	4.962	5.0
2.70	4.207	4.502	4.640	4.800	4.888	5.010	5.087	5.1
2.75	4.293	4.599	4.742	4.908	5.001	5.129	5.211	5.3
2.80	4.380	4.695	4.844	5.016	5.114	5.247	5.335	5.4
2.85	4.466	4.791	4.946	5.124	5.227	5.366	5.459	5.5
2.90	4.552	4.888	5.048	5.231	5.339	5.484	5.584	5.7
2.95	4.638	4.984	5.151	5.339	5.452	5.603	5.708	5.8
	4.030	5.080	5.253	5.447	5.565	5.721	5.832	5.9
3.00			0.200	0.7777	0.000	0.121	0.002	0.0

VOLUME OF TRENCH BACKFILL (CU. METERS) PER LINEAL METER OF ELLIPTICAL STORM SEWER PIPE

ote: The calculated v und Size (mm)	1200 (48")	1350 (54")	1500 (60")	1650 (66")	1800 (72")	1950 (78")	2100 (84")	2250 (90)
ninal Rise (mm)	950 (38")	1075 (43")	1200 (48")	1325 (53")	1450 (58")	1575 (63")	1700 (68")	1800 (72
ninal Span (mm) Thickness (mm)	1500 (60") 140	1700 (68") 152	1900 (76") 165	2075 (83") 178	2275 (91") 191	2450 (98") 203	2650 (106") 216	2825 (113 22
Area (sq meters)	1.76	2.23	2.75	3.29	3.92	4.56	5.30	5.9
1.15	0.623							
1.20	0.735							
1.25	0.848	1.019						
1.30	1.410	1.171						
1.35	1.550	1.323						
1.40	1.690	1.474	1.202					
1.45	1.831	1.626	1.365					
1.50	1.971	1.777	1.528					
1.55	2.111	1.929	1.691	1.391				
1.60	2.251	2.081	1.854	1.564				
1.65	2.391	2.232	2.017	1.737				
1.70	2.531	2.384	2.180	1.910	1.597			
1.75	2.672	2.535	2.343	2.084	1.781			
1.80	2.812	2.687	2.506	2.257	1.966			
1.85	2.952	2.839	2.669	2.430	2.151	1.808		
1.90	3.092	2.990	2.832	2.603	2.335	2.003		
1.95	3.232	3.142	2.995	2.776	2.520	2.198	1.832	
2.00	3.372	3.293	3.158	2.950	2.705	2.393	2.038	
2.05	3.513	3.445	3.321	3.123	2.889	2.587	2.244	
2.10	3.653	3.597	3.484	3.296	3.074	2.782	2.450	2.14
2.15	3.793	3.748	3.647	3.469	3.258	2.977	2.657	2.3
2.20	3.933	3.900	3.810	3.642	3.443	3.172	2.863	2.5
2.25	4.073	4.051	3.973	3.816	3.628	3.367	3.069	2.79
2.30	4.213	4.203	4.136	3.989	3.812	3.561	3.275	3.00
2.35	4.354	4.355	4.299	4.162	3.997	3.756	3.481	3.22
2.40	4.494	4.506	4.462	4.335	4.181	3.951	3.688	3.44
2.45	4.634	4.658	4.625	4.508	4.366	4.146	3.894	3.65
2.50	4.774	4.809	4.788	4.681	4.551	4.340	4.100	3.87
2.55	4.914	4.961	4.951	4.855	4.735	4.535	4.306	4.09
2.60	5.055	5.113	5.114	5.028	4.920	4.730	4.512	4.30
2.65	5.195	5.264	5.277	5.201	5.105	4.925	4.719	4.52
2.70	5.335	5.416	5.441	5.374	5.289	5.120	4.925	4.74
2.75	5.475	5.567	5.604	5.547	5.474	5.314	5.131	4.95
2.80	5.615	5.719	5.767	5.721	5.658	5.509	5.337	5.17
2.85	5.755	5.871	5.930	5.894	5.843	5.704	5.543	5.38
2.90	5.896	6.022	6.093	6.067	6.028	5.899	5.750	5.60
2.95	6.036	6.174	6.256	6.240	6.212	6.093	5.956	5.82
3.00	6.176	6.325	6.419	6.413	6.397	6.288	6.162	6.03
3.05	6.316	6.477	6.582	6.587	6.582	6.483	6.368	6.25
3.10	6.456	6.629	6.745	6.760	6.766	6.678	6.575	6.47
3.15	6.596	6.780	6.908	6.933	6.951	6.873	6.781	6.68
3.20	6.737	6.932	7.071	7.106	7.135	7.067	6.987	6.90
3.25	6.877	7.083	7.234	7.279	7.320	7.262	7.193	7.12
3.30	7.017	7.235	7.397	7.453	7.505	7.457	7.399	7.33
3.35	7.157	7.387	7.560	7.626	7.689	7.652	7.606	7.5
3.40	7.297	7.538	7.723	7.799	7.874	7.846	7.812	7.70
3.45	7.437	7.690	7.886	7.972	8.059	8.041	8.018	7.98
3.50	7.578	7.841	8.049	8.145	8.243	8.236	8.224	8.2
3.55	7.718	7.993	8.212	8.318	8.428	8.431	8.430	8.4
3.60	7.858	8.145	8.375	8.492	8.612	8.626	8.637	8.63
3.65	7.998	8.296	8.538	8.665	8.797	8.820	8.843	8.8

VOLUME OF TRENCH BACKFILL (CU. METERS) PER LINEAL METER OF ELLIPTICAL STORM SEWER PIPE

	calculated volume ound Size (mm)	2400 (96")	2550 (102")	2700 (108")	2850 (114")	3000 (120")	3300 (132")	
	nal Rise (mm)	1925 (77")	2050 (82")	2175 (87")	2300 (92")	2425 (97")	2650 (106")	2900 (116
	nal Span (mm)	3025 (121")	3200 (128")	3400 (136")	3575 (143")	3775 (151")	4150 (166")	4500 (180
	hickness (mm) rea (sq meters)	241 6.81	248 7.59	254 8.46	267 9.39	279 10.43	305 12.52	33 14.8
nu Ai	2.20	2.163	7.59	0.40	9.39	10.43	12.52	14.0
	-							
	2.25	2.391		_				
	2.30	2.618						
	2.35	2.846	2.418					
	2.40	3.074	2.656					
ø	2.45	3.302	2.893					
Ľ.	2.50	3.530	3.130	2.694				
đ	2.55	3.757	3.368	2.942				
Ť.	2.60	3.985	3.605	3.190				
ž	2.65	4.213	3.842	3.438	2.958			
	2.70	4.441	4.080	3.687	3.216			
e E	2.75	4.669	4.317	3.935	3.475	2.973		
g	2.80	4.896	4.554	4.183	3.733	3.243		
Б	2.85	5.124	4.791	4.431	3.991	3.513		
3	2.90	5.352	5.029	4.679	4.250	3.782		
ິ	2.95	5.580	5.266	4.927	4.508	4.052		
ē	3.00	5.808	5.503	5.175	4.766	4.322	3.377	
L L	3.05	6.035	5.741	5.423	5.024	4.591	3.669	
2	3.10	6.263	5.978	5.672	5.283	4.861	3.960	
D(m) = Average Depth of Trench from Subgrade to Invert of Pipe	3.15	6.491	6.215	5.920	5.541	5.131	4.251	
Ę	3.20	6.719	6.453	6.168	5.799	5.401	4.542	
Ĕ	3.25	6.947	6.690	6.416	6.058	5.670	4.834	
ğ	3.30	7.174	6.927	6.664	6.316	5.940	5.125	3.97
ă								
g	3.35	7.402	7.165	6.912	6.574	6.210	5.416	4.28
ğ	3.40	7.630	7.402	7.160	6.832	6.479	5.708	4.59
≱	3.45	7.858	7.639	7.408	7.091	6.749	5.999	4.90
ì	3.50	8.086	7.877	7.656	7.349	7.019	6.290	5.22
Ê	3.55	8.313	8.114	7.905	7.607	7.289	6.582	5.53
ř	3.60	8.541	8.351	8.153	7.866	7.558	6.873	5.84
_	3.65	8.769	8.589	8.401	8.124	7.828	7.164	6.15
	3.70	8.997	8.826	8.649	8.382	8.098	7.455	6.46
	3.75	9.225	9.063	8.897	8.640	8.367	7.747	6.77
	3.80	9.452	9.301	9.145	8.899	8.637	8.038	7.09
	3.85	9.680	9.538	9.393	9.157	8.907	8.329	7.40
	3.90	9.908	9.775	9.641	9.415	9.176	8.621	7.71
	3.95	10.136	10.013	9.890	9.673	9.446	8.912	8.02
	4.00	10.364	10.250	10.138	9.932	9.716	9.203	8.33
	4.05	10.591	10.487	10.386	10.190	9.986	9.495	8.64
	4.10	10.819	10.725	10.634	10.448	10.255	9.786	8.96
	4.15	11.047	10.962	10.882	10.707	10.525	10.077	9.27
	4.20	11.275	11.199	11.130	10.965	10.795	10.368	9.58
	4.25	11.503	11.437	11.378	11.223	11.064	10.660	9.89
	4.30	11.730	11.674	11.626	11.481	11.334	10.951	10.20
	4.35	11.958	11.911	11.875	11.740	11.604	11.242	10.51
	4.40	12.186	12.149	12.123	11.998	11.874	11.534	10.83
	4.45	12.414	12.386	12.371	12.256	12.143	11.825	11.14
	4.50	12.642	12.623	12.619	12.515	12.143	12.116	11.45
	4.55	12.869	12.861	12.867	12.515	12.413	12.110	11.40
	4.60	13.097	13.098	13.115	13.031	12.952	12.699	12.07
	4.65 4.70	13.325	13.335	13.363	13.289	13.222	12.990	12.38
	// ///	13.553	13.573	13.611	13.548	13.492	13.281	12.70

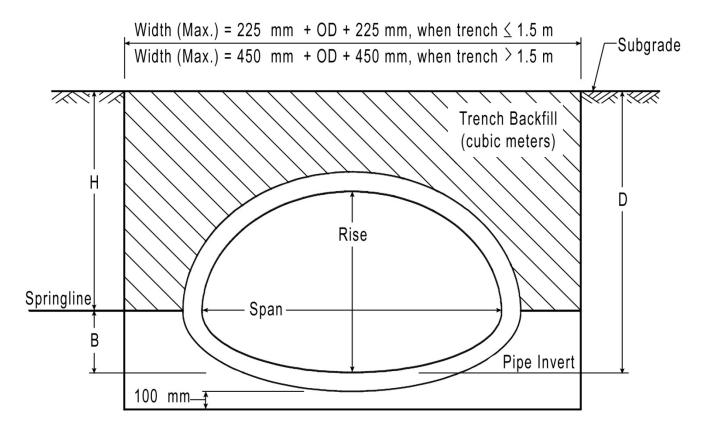

W = Width of Trench (meters)

D = Depth from Subgrade to Pipe Invert (meters)

H = Height of Trench Backfill Limits (meters) = (D - B)

B = Distance from Pipe Invert to Springline (meters) (See Table)

L = Length of Trench (meters)

A = End Area of Pipe above Springline (square meters) (See Table)

Volume (cubic meters) = $[(H \times W) - A] \times L$

This formula should be used by the designer or field engineer to determine the volume of TRENCH BACKFILL that should be paid for when backfilling storm sewer trenches utilizing reinforced concrete ARCH PIPE. Maximum trench widths permitted by Article 550.04 of the Standard Specifications are used.

Volume of Trench Backfill (cu m) Per Lineal Meter Of Reinforced Concrete Pipe Arch Storm Sewer

Equivalent Round Size (mm)		Ris	se	Span		Span (mm) (inch)		Wall Thickness	End Area Above Springline	B
	. ,	(mm)	(inch)	(mm)	(sq m)			(m)		
375	(15 in)	279	11.0	457	18.0	57	0.100	0.119		
450	(18 in)	343	13.5	559	22.0	64	0.132	0.152		
525	(21 in)	394	15.5	660	26.0	70	0.180	0.158		
600	(24 in)	457	18.0	724	28.5	76	0.257	0.149		
675	(27 in)	572	22.5	921	36.3	89	0.390	0.195		
750	(30 in)	572	22.5	921	36.3	89	0.390	0.195		
900	(36 in)	676	26.6	1111	43.8	102	0.561	0.216		
1050	(42 in)	795	31.3	1299	51.1	114	0.762	0.256		
1200	(48 in)	914	36.0	1486	58.5	127	0.991	0.296		
1350	(54 in)	1016	40.0	1651	65.0	140	1.214	0.329		
1500	(60 in)	1143	45.0	1854	73.0	152	1.518	0.372		
1650	(66 in)	1372	54.0	2235	88.0	178	2.207	0.433		
1800	(72 in)	1372	54.0	2235	88.0	178	2.207	0.433		
2100	(84 in)	1575	62.0	2591	102.0	203	2.146	0.472		
2250	(90 in)	1829	72.0	2921	115.0	216	3.684	0.604		
2400	(96 in)	1962	77.3	3099	122.0	229	4.280	0.619		
2700	(108 in)	2213	87.1	3505	138.0	254	5.488	0.683		
3000	(120 in)	2461	96.9	3912	154.0	279	6.601	0.796		
3300	(132 in)	2705	106.5	4286	168.8	254	6.777	1.155		

EXAMPLE

Given: Pipe = 750 mm Round size eq., rise = 572 mm, span = 921 mm Average Depth, D = 1.43 m Trench Length = 25.1 m Width, W = 2.01 mCubic Meters of TRENCH BACKFILL Find: Solution: From Table: End Area, A = 0.39 sq. mB = 0.195 m ≈ 0.20 m Pay Height, H = D - B = 1.43 - 0.20= 1.23 m $= [(H \times W) - A] \times L = [(1.23)(2.01) - 0.39](25.1)$ Volume $= 52.3 \text{ cu. m}^3$ TRENCH BACKFILL VOLUME

Section F

DOCUMENTATION EXAMPLES

QUANTITY BOOK, PROGRESS AND FINAL DOCUMENTATION

The following pages of this Section contain examples for the Quantity Book and typical cross-refrence progress and final documentation.

Project Diary Inside CoverF-1
Project Diary Typical Daily EntryF-2
ICORS Diary Daily EntryF-3
Weekly Report of Resident F-4
Quantity Book Cover PageF-5
Quantity Book Index of SheetsF-6
Quantity Sheet – Pavement Patching
(left side)F-7
Quantity Sheet – Pavement Patching
(right side)F-8
ICORS Daily QuantitiesF-9
ICORS Quantity BookF-10
Field Book Inside CoverF-11
Field Book Bridge Deck Pour F-12
Field Book PCC Paving Inspection F-13
Field Book HMA Paving Inspection F-14
PCC Paving Daily Record
(BC 2531) F-15, 16
Bituminous Paving Daily Record
(BC 2529) F-17, 18
Field Book Concrete QC/QA F-19
Agreement on Accuracy of Plan Quantities
(BC 981)F-20, 21, 22
Estimating Earth Exc. IDR (via truck bed
measurements) F-23
Estimating Earth Exc. IDR (via struck capacity
in Section D)F-24
Estimating Porous Granular Embankment F-25
Estimating Reinforcing Bars and Concrete
Structures IDRF-26
Estimating Storm Sewer IDRF-27
Traffic Control & Protection Field BookF-28
Estimating Topsoil Exc. & Placement IDRF-29
Patching Electronic Spreadsheet Example F-30
Rebar Electronic Spreadsheet ExampleF-31
Material Allowance Affidavit (BC 49) F-32
Statement of Material Allowance (BC 131) F-33
Quantity Sheet – HMA SC C (left side)F-34
Quantity Sheet – HMA SC C (right side)F-35
PC Concrete Sidewalk IDR

Truck Tare Weights (BC 1465) F-37
Independent Truck Weight Check
(OQCR 2367)F-38, 39, 40
Aggregate Base Course, Type A Ticket Tape F-41
Agricultural Ground Limestone IDRF-42
Seeding and Mulch IDRF-43
Traffic Control Surveillance Report
(BC 2240) F-44
Structure Excavation IDRF-45
Trench Backfill/ Storm Sewer IDR F-46
Concrete Structures & Reinforcement Bar
(Computation Check) F-47
Concrete Computation Summary Sheet F-48
Concrete OutletF-49
Surface Variations Field Book F-50
Quantity Sheet - Traffic Control Prot 701401 F-51
Traffic Control Price Adjustment Field Book F-52
Quantity Sheet - Traf Cont Price Adjustment F-53
Electric Cable Schematic Field Book Entry F-54
Electric Cable Field BookF-55
Pipe Culvert Field Book F-56
Piling - Ordered Length Letter F-57
Piling Field BookF-58
Test Pile Driving Record (BBS 757) F-59
Production Pile Driving Data (BBS 2184) F-60
Prime Coat (Adding Machine Tape) F-61
Weekly Trainee Report (SBE 1014)F-62
Structural Steel, Furnish & Erect IDR F-63
Fertilizer Nutrients IDRF-64
Pavement Patching Field BookF-65
Base Course Widening IDR F-66
Slopewall IDR F-67
Supplemental Watering IDRF-68
Seedlings IDR F-69
Tree Removal Field BookF-70
Tack Coat- Emulsion Ticket Tape (in pounds) F-71
Tack Coat- Cutback Ticket Tape (in pounds) F-72
Field Measurement w/ Electronic Devices F-73-76

Agreement on Accuracy of Plan Quantities
(BC 981) F-20, 21, 22
Aggregate Base Course, Type A Ticket Tape. F-41
Agricultural Ground Limestone IDRF-42
Base Course Widening IDRF-66
Bituminous Paving Daily Record
(BC 2529) F-17, 18
Concrete Computation Summary SheetF-48
Concrete OutletF-49
Concrete Structures & Reinforcement Bar
(Computation Check)F-47
Electric Cable Field BookF-55
Electric Cable Schematic Field Book Entry F-54
Estimating Earth Exc. IDR (via truck bed
measurements)F-23
Estimating Earth Exc. IDR (via struck capacity
in Section D)F-24
Estimating Porous Granular Embankment F-25
Estimating Reinforcing Bars and Concrete
Structures IDRF-26
Estimating Storm Sewer IDRF-27
Estimating Topsoil Exc. & Placement IDRF-29
Fertilizer Nutrients IDRF-64
Field Book Inside CoverF-11
Field Book Bridge Deck Pour F-12
Field Book PCC Paving Inspection F-13
Field Book HMA Paving Inspection F-14
Field Book Concrete QC/QAF-19
Field Measurement w/ Electronic Devices F-73-76
ICORS Diary Daily EntryF-3
ICORS Daily QuantitiesF-9
ICORS Quantity BookF-10
Independent Truck Weight Check
(OQCR 2367) F-38, 39, 40
Material Allowance Affidavit (BC 49) F-32
Patching Electronic Spreadsheet ExampleF-30
Pavement Patching Field BookF-65
PCC Paving Daily Record
(BC 2531) F-15, 16
PC Concrete Sidewalk IDRF-36
Piling - Ordered Length Letter F-57
Piling Field Book F-58

Pipe Culvert Field Book	. F-56
Prime Coat (Adding Machine Tape)	F-61
Production Pile Driving Data (BBS 2184)	F-60
Project Diary Inside Cover	F-1
Project Diary Typical Daily Entry	F-2
Quantity Book Cover Page	F-5
Quantity Book Index of Sheets	F-6
Quantity Sheet – Pavement Patching	
(left side)	F-7
Quantity Sheet – Pavement Patching	
(right side)	F-8
Quantity Sheet – HMA SC C (left side)	F-34
Quantity Sheet – HMA SC C (right side)	F-35
Quantity Sheet – Traf Cont Price Adjustment	F-53
Quantity Sheet – Traffic Control Prot 701401 .	.F-51
Rebar Electronic Spreadsheet Example	. F-31
Seeding and Mulch IDR	. F-43
Seedlings IDR	F-69
Slopewall IDR	F-67
Statement of Material Allowance (BC 131)	F-33
Structural Steel, Furnish & Erect IDR	F-63
Structure Excavation IDR	F-45
Supplemental Watering IDR	. F-68
Surface Variations Field Book	F-50
Tack Coat- Cutback Ticket Tape (in pounds)	. F-72
Tack Coat- Emulsion Ticket Tape (in pounds)	. F-71
Test Pile Driving Record (BBS 757)	F-59
Traffic Control & Protection Field Book	F-28
Traffic Control Price Adjustment Field Book	F-52
Traffic Control Surveillance Report	
(BC 2240)	F-44
Tree Removal Field Book	. F-70
Trench Backfill/ Storm Sewer IDR	F-46
Truck Tare Weights (BC 1465)	F-37
Weekly Report of Resident	F-4
Weekly Trainee Report (SBE 1014)	.F-62

County	CHAMPAIGN			
Section	(10-33HB)BDR			
Route	FAI 57			
District	05			
Contract Number	70924			
Job Number	C-95-031-11			
Project Number				
Year	2016			
IF FOUND RETURN TO:				
Illinois Dept. of Transportation				
13473 IL Hwy 133				
P.O. Box 610				
Paris IL	. 61944-0610			

Resident Name	Sheldon Cooper
Project Phone	(217) 251-XXXX
Contractor's Name	Murphy Construction
Contractors Address	604 E Green St
Contractor City	Champaign
Contractor Phone	(217) 891-XXXX

All entries made by Resident unless otherwise noted: Sheldon Coopu 50

Resident Signature

Leonard Hoftstadter LH *Raj Koothrappali R.K.* Howard Wolowitz *M*

Diary Entry Example

	Wed. MAY 30									
	Hours Worked: 11.0									
	Weather: Cloudy, Warm									
	Temp: 75°f									
	Controlling Item: Earth Ex									
	Working Day Charged: 1.0									
	Kilian: Worked from 12p to 7p placing Bit. on shldr at 17 th									
	St. Sawcutting crew worked at Royal Heights Road.									
	Baxmeyer: Worked on Earth Ex and pipe Culverts									
	<u>Craig</u> : Finished setting forms on floor slab of box culvert									
	Kilian supplied completed Engrs Field Office TY A									
	on this date, begin payment. J. Smith (SFE) visited job									
	site today. Union Pacific RR provided 2 RR flaggers for									
(Traffic Control)	11 hours.									
	T.C. Okay at 7AM and 5PM									
	Baxmeyer: 6 OP - 5 LAB - 1 TMSTR									
	Kilian: $7LAB - 40P - 1TMSTR$									
	Craig (DBE): 2 CAR, 1 LAB									

Contract: County: Section:	(10-33	IPAIGN HB)BDR	Departn	State of Illinois Department of Transportation ICORS System Diary of Resident Engineer			Resident: Supervisor: Field Office Phone: Job Number:	Jason R. Smith Mike Carnahan (217)251-4749 C-95-031-11
Route:	FAI 57						Project:	N/A
District:	05							
Date Thurso	day, July	12, 2012	Week	ly Report Num	ıber	7		
Controlling It	tem	Microsi	lica Overlay					
Persons Work	king	6.00	Hours	Worked	8.00			
Weather		7am 61	Cloudy 12p 85	Cloudy 3p 88	Cloudy			
Working Day	s Charg	ed	0.00	Workable Da	ays	1.00		
• • • •		Oneil removed protective shield and began digging out for Class D patches on the bridge ends						
Additional Paragraphs 7		Traffic Control inspected by Jason Smith at 7am and no problems found						
br						•	could not be vibratory for the patching is not so	

(7) Illinoi of Tra	s Dep anspo	artment rtation		Weekly Report of Resident			CHAMPAIGN (10-33HB)BDR
Repo	ort No:	7	Week Ending:	7/14/2012	% Co	mplete: 46.00		
	ract Price:	\$409,2	252.83 Estima	ated Completic	on Date:	8/3/2012	Route:	
Conti	ractor:	Oneil	Brothers, a Division of	MACC of ILL,	INC		District:	
Conti	ract Complet			Contract Wo		s: 0.00	Contract No.	
	Limit Extend			Average Num				C-95-031-11
				3			Project:	N/A
	ution 02/29 dent Name:		Start 05/29/2012	Reports Suspende	d:	Reports Resumed		ificant 8/3/2012 pletion:
Day		ours /orked	Controlling Item	Working Days Charged		Provide summary of Contrac eday. Compare performance provided when less than a fu	with Progress Sch	edule. A reason must be
Sun	7/8/2012	0.00	Microsilica Overlay	0.00	0.00	No work. No workable day due to ra	ain on the jobsite.	
Mon	7/9/2012	8.00	Microsilica Overlay	0.00	1.00	Oneil wetting the deck and covering for the following day.	g in preparation of the r	nicrosilica overlay scheduled
Tue	7/10/2012	10.00	Microsilica Overlay	0.00	1.00	Oneil placed the microsilica overlay	v on this day	
Wed	7/11/2012	8.00	Microsilica Overlay	0.00	1.00	Oneil removed protective shield	en esterar actuar da secondar	
Thu	7/12/2012	8.00	Microsilica Overlay	0.00	1.00	Oneil removed protective shield and ends	l began digging out for	Class D patches on the bridge
Fri	7/13/2012	8.00	Microsilica Overlay	0.00	1.00	Oneil removed protective shield and ends. Also placed the polymer concr		
Sat	7/14/2012	0.00	Microsilica Overlay	0.00	1.00	no work		
		Total Thi Previous	is Week: Total:	0.00	6.00 38.00			r
		Total To		0.00	44.00			
Will	I Contractor C	Complete	e project on time at pre	esent rate of pro	ogress?	Yes		
lf n Hav	o - Why?		of progress with Cont			Yes		

Orig: Regional Engineer c.c: Contractor

Bur. Construction Project File Resident J-R Ad

(217) 251-4749

NOTE: If the Contractor disagrees with the working day charges, detailed reasons must be expressed in writing to the Regional Engineer within 7 days after receipt of report.

BC 239 (Rev. 02/06/09)

Printed 8/17/2012 10:19:46 AM

IDOT QUANTITY BOOK

County	CHAMPAIGN		
Section	(10-33HB)BDR		
Route	FAI 57		
District	05		
Contract Number	70924		
Job Number	C-95-031-11		
Project Number			
Resident's Name	Sheldon Cooper		
Field Office Phone	(217) 251-XXXX		
Supervisor Name	Amy Farrah Fowler		
Contractor Name	Murphy Construction		
Contractor Address	604 E Green St		
	Champaign	IL	61820
Contractor Phone	(217) 891-XXXX		

If found, please return this to the Resident Engineer or forward it to the District Office address below

Illinois Dept. of Transportation
13473 IL Hwy 133
P.O. Box 610
Paris IL 61944-0610

IDOT QUANTITY BOOK

	COUNTY	177	DISTRICT	02
INDEX	SECTION	20RS-1 & 20BR		
OF	ROUTE	FAP 5		
	CONTRACT	84776		
SHEETS	JOB NO	C-92-072-12		
	PROJECT	STPF-BRF-0005/050/000		

FASID	ITEM NO	PAGE	DESCRIPTION
Q10C01	20300100	1	CHANNEL EXCAV
	28100107	2	STONE RIPRAP CL A4
	28200200	3	FILTER FAB
	50100100	4	REM EXIST STRUCT
	50200100	5	STRUCTURE EXCAVATION
	50300100	6	FLOOR DRAINS
	50300208	7	CONC ENCASE
	50300225	8	CONC STRUCT
	50300255	9	CONC SUP-STR
	50300260	10	BR DECK GROOVING
	50300300	11	PROTECTIVE COAT
	50800205	12	REINF BARS, EPOXY CTD
	50800515	13	BAR SPLICERS
	51200700	14	FUR CONC PILES
	51202305	15	DRIVE CONC PILES
	51204200	16	TEST PILE CONCRETE
	51205200	17	TEMP SHT PILING
	51500100	18	NAME PLATES
	66700205	19	PERM SURV MKRS T1
	70106500	20	TEMP BR TRAF SIGNALS
3AAL01	X0322352	21	SEEDING MOBILIZATION
	X2500200	22	TEMP SEEDING
	40600645	23	LEV BIN MM, N90
	40603090	24	HMA BINDER CSE, IL-19.0, N90
	40603345	25	HMA SURFACE CSE, MIX "D", N90
	Z0013798	26	CONSTRUCTION LAYOUT
	Z0028415	27	GEOTECHNICAL REINF
	FRC00100	28	CONSTRUCTING TEST STRIP
	X9200400	29	TRAF CONT & PROT



Page 280

Item 44200156

Fund 33DC01

PAVT PATCH T2 13

Plan Quantity 327.800

Unit Measure SQ YD Contract Unit Price 64.0000 **Quantity Sheet**

County 177

Section 20RS-S & 20BR

Route FAP 5

District 02 Contract No. 84776 Job No. C-92-072-12

Project STPF-BRF-0005/050/000

	Authorizations							
Number	Date App'vd	Add	Deduct	Total				
14	7/27/16	35.4		363.2				

Cnty Const Sfty 177 I000 2A Quantity 327.800

	Station to Station Quantities Placed			Evidence of	Progress	
Date	Location or Description	This Date	To Date	Pay Est	Material Inspection	Document Source
7/12/16	STA 69+34 $ ightarrow$ 84+21 NB	83.2	83.2		Plant Rpt.	FB #3, p. 12
7/13/16	STA 96+13 $ ightarrow$ 130+01 NB	121.4	204.6		¢ TiCkets	FB #3, p. 12
7/15/16	STA 125+16 \rightarrow 74+95 SB	95.4	300.0		∳ Test	", p. 16
7/19/16	STA 74+51 $ ightarrow$ 62+49 SB	63.2	363.2	#3/327.8		", p. 24
				#4/363.2		
			FINAL			
Source of	documentation					
for final qu	uantity: FB #3, pp	. 8-24 for	<u>Qtys & De</u>	epths		

For all tonnage items weighed on platform scales: Scales checked by Dept. Of Agriculture Date on decal 04/05/16 Identification No. 01-2345 Scale Location Sterling, IL

Inspection Reports

MT and Daily Diana Output		to Date	Other Code or Remarks
MI-305, Daily Plant Output	65.4 tons	65.4	
	90.2 tons	155.6	
	70.4 tons	226.0	
•	47.1 tons	273.1	
		70.4 tons	70.4 tons 226.0

Contract: County: Section: Route:	76308 MADI 60-(4,5 FAI 27	SON 5)RS-2	De	State of Illinois partment of Transp ICORS System Daily Quantities	ortation		visor: Office Phone: umber:	Brett Sc Ted Ner (618)28 C-98-12 N/A	msky 8-5071
District:	08								
DQ Number:		41]	Date: 06/16/2016	Contra	actor:	Keeley & Sons	s, Inc	
Pay Item Key	:	442002	204-Q050J	01-119I0002A-A	PAVT PATCH	T3 17			
Qty Inspected	l:	24.40	SQ YD	Posted 🗹 Paid on	Estimate Nbr:	2	Estimate or	Final:	Final
Evidence of I	nspectio	n:	Plant Re	port & Tickets and Te	est in File				
Location:			I-270 W	B Driving lane Station	n 837+55 to 816+.	50			
Source of Pro Documentatio	0		Field boo	ok # 3, page 2					

Contract: County: Section:	76308 MADISON 60-(4,5)RS-2	Depar	State of Illinois Department of Transportation ICORS System	Resident: Supervisor: Field Office Phone: Lob Mumbor:	Brett Schwalb Ted Nemsky (618)288-5071
Route:	FAI 270		Quantity Book	Project:	C-90-123-10 N/A
District:	80	PAVT PATCI	PATCH T3 17		
Qty Book Page:	44200204-Q050J01-A	PAVT PATCI	PATCH T3 17		
Pay Item Nbr:	44200204	FASID Q050J01	Subjob A		
Units	SQ YD UnitPrice	ice \$81.6000			
Quantity Awarded	67.000	Adjusted Total Qty:	83.330		
Source Of Final Documentation:		FLD BK #3 PG24			
Finaled	Yes				
Authorizations:					
Auth Number Auth 4	Auth Letter CCS Code 11910002A	Date Approved 07/14/2016	Added Qty Deducted Qty 16.330 0.000		
Quantities:]	
CCS Code DQ Nbr	Date	Oty Inspected To Date	Evidence of Inspection Source of Pr	Source of Progress Documentation:	Estimate #
11910002A41Location: I-270 WB DriviEstimate or Final: Final	06/16/2016 ng lane Sta 8		Plant Report & Tickets and Test in File	Fld bk # 3 pg	5
11910002A Location: I-270 WB Estimate or Final:	11910002A 53 06/17/2016 Location: I-270 WB sta 815+95 to 792+75 Estimate or Final: Final	42.930 67.330	Plant Report & Tickets & Test in File	fid bk#3 pg 3	3 2
11910002A 157 06/21/2016 Location: I-270 WB DL PATCH # 34 A Estimate or Final:	157 06/21/2016 : DL PATCH # 34 A Final	16.000 83.330	Plant Report & Tickets & Test in File	FLD BK # 3 pg 4	6 8
Friday, July 22, 2016 Report Name: Quantity Book	Book		Page 1 of 2		

10. サムマ ジン・カーマン・ジストル セムマ ジン・カーマン・ジストル ナムマシン・		
FIELD BOOK # 4 - BRIDGE	Projects	
	TABLE OF CONTENTS	
IF FOUND PLEASE RETURN TO:	S. ABUT PILE DATA	1
	PIER PILE DATA	2-3
REGIONAL ENGINEER	N. ABUT PILE DATA	4
Name ILLINOIS DEPT. OF TRANSPORTATION		5
DISTRICT 4	TEST PILE CUT-OFF GRADES	6-7
Address 401 MAIN STREET	FILLET CALCULATIONS	8-11
PEORIA, IL 61202-1111	DECK DEPTH CHECKS	12-15
Phone (OPTIONAL)	BRIDGE APPR. MEAS. & CALCS	16
	BRIDGE APPR. SHLDR MEAS. & CALCS	17-18
Knox 5-5HB-2 FA 206 4 12345 C-94-789-12		
This book is published on a fine 50% cotton-content ledger paper, specially treated for maximum archival service, and protected by a water resistant surface sizing.		

	l	1		1	LOCATION	REBAR	DEPTH	CONC. D	ЕРТ
DATE:	6/7/16	BR:	IDGE BU	ILDERS CO.			> > 1/1/4		8"
					É. ABUT.	4	2 1/4"	++++++	8
					1/4 SPAN 1	-	2 3/8"		3 1/
AIR TE	MP - C	.00 AM:	60°				5,0) <u>1</u>
		NOON			MID-SPAN 1		2 1/4"		8"
		3:00 PM							Ŭ
					3/4 SPAN 1	Ź	2 1/4"		8″
POUR S	TART T	IME: 7:	DO AM						
					PIER 1	4	2 1/4"		8"
POUR E	ND TIN	E: 2:00	PM						
		COMPI			1/4 SPAN 2		2 3/8"		3 1/
CURING	- COVE	COMPL	EIE: 4:0	O PM	MID-SPAN 2		2 1/4"		B 1/
BRIDGE	SKEW/	· 15°						++++++	, 1
DRIDUC		. 10			3/4 SPAN 2	2	. 1/4"		8"
FINISH	ING M	ACHINE	BIDWE	LL	07 1 01 7 1 4				
						2	2 1/4"		8"
FINISH	ING MA	CHINE	DRIENTA	TION: 90°					
	NCOM	PLETED:	6/4/16					+++++++++++++++++++++++++++++++++++++++	
	1100/11		0/1/20		PLAN DEPTH OF	REBAR:	2 1/4"		
INSPE	CTORS:	EAL, C	R		PLAN DECK THI		8"		
COMME	NTS:	FINISH	ING MA						Щ

100

PG. 8

法运输与非常公共

16 27

F - 12

A PROPERTY AND

PG. 67	BEAMS			<i>∀</i> - <i>T</i> - <i>d</i>	P-1-B									= 1548 CY						AMP		2 = 474 GAL			GAL V OK	
	<u>JWN TS</u>	, Z			1 1/4"			1 1/2"					= 55728 SF		72 27	S) = 2672 CY	108%			TYPE 3 MEMBRANE CURING - ILL OK STAMP		REQ'D = L X W X 2 APPL = 2322 (25.5') 2 = 474 GAL	250 GAL/SY		USED 9 BARRELS @ 55 GAL/BAR = 495 GAL	
	$AIR(\mathbb{Z})$	5:0	5.2	5.4	5.5	5.2	5,2	4.9	5.3	<i>5.6</i>	ک .ک		22' X 24' = 5	REQ'D VOLUME = 55728 X 9 X 1		DELIVERED (FROM TICKETS) = 1672 CY	$Y ELD = 1672 \times 100 = 108\%$	1548		ABRANE CURIN		WX2 APPL =	250 SF/GAL	TH - 241 + 0/1	RELS @ 55 GF	
	STATION	360+00	362+50	365+00	367+50	370+00	372+50	375+00	377+50	380+00	382+50		AREA = 2322' X 24'	REQ'D VOLUI		DELIVERED (YIELD = 16	ST		TYPE 3 MEN		REQ'D = L X	25		USED 9 BAR	
	NING									R				VER				00+9					1/16	6/7/16	16	
CONT REINF PCC PAVT 9	RIVER BLUFF PAVING	INSPECTORS:	ZOE HEINZ	TOM DUNCAN		LOCATION: WB STA 360+00 TO 383+22	WIDTH = 24'			*SKI OPERATED CMI SLIPFORM SPREADER	JRM PAVER	*STRING-GUIDED CMI TINING MACHINE		*STRING-GUIDED CMI MEMBRANE SPRAYER		= 20MIN.	SEE TICKETS FOR REV. COUNT	15 MIN BREAKDOWN @ STA 376+00		2225)			Meas. By: ZH, JD 6/7/16	ZH 6/	00 6/1/16	-
ONT REINF	RI		М		M	STA 360+00				D CMI STIPFO	D CMI STIPFO	ED CMI TINII	W/ ASTROTURF DRAG	ED CMI MEM	IGITA TING	AVG. HAUL TIME = 20MIN.	ICKETS FOR	N BREAKDO		AIL #2 (STD	4 <i>RS</i>	17/2"	Meas. By	Calc. By:	Ckd. By:	y on 1st day.
42100200 CU	DATE: 6/7/16	WEATHER: CLOUDY	68° @ 7:30 AM	75° @ NOON	72° @ 4:30 PM	CATION: WB	LENGTH = 2322'		EQUIPMENT:	KI OPERATEI	*SKI OPERATED CMI SLIPFORM PAVER	TRING-GUIDI	W/ ASTRO:	TRING-GUIDI	TRUCKS: ALL AGITATING	AVG.	SEE T.	15 MI	REINFORCING:	*BAR LAP DETAIL #2 (STD 2225)	*KENWAY & BARS	*DEPTH: 3 1/2 ±1/2"				* Note: Record only on 1st day.

F-13

<u>406030</u>	085 HM	1A BIND	ER CSE	IL-19.0	<u>N70</u>
DATE: 6,	20/16		HEINZ P	AVING	
WEATHE	R: SUNN	IY	INSPECT	ORS:	
65°@(:30 AM		EMILY	DUNCAN	
90° @ 2	2:30 PM		MATT	PATEL	
LOCATIO	N: WBS	TA 37+2	0 TO 11	5+80	
LENGTI	H = 7860) '			
MAT W	IDTH = 1	2'			
MAT TI EQUIPME	HCKNESS NT:	5 = 1.5 "			
PAVER:	BARBER	R-GREEN	E SA 13	1	
VIB ROL	LER: DY	NAPAC 4	2A; TAC	H=2400	VPM
PNEUM	ATIC ROL	LER: INC	RAM		
FINISH	ROLLER:	GALLION	1 266B; S	STATIC M	IODE
MAX SPE	ED =	2 <i>400</i> VP	<u>M_</u> =	240 FT/	MIN
VIB ROLL	ER 1C	ІМРАСТ	S/FT		
ROLLING	PATTERI	V:			
4 PASSI	ES REQ'D	OVER E	ACH POII	NT	
9 PASSI	ES FOR F	ULL MAT	WIDTH		
MAX PAV	'ER = 24	10 FT/MI	N X 0.9	= 24 F1	-/MIN
SPEED	9	PASSES			
	Meas. E	y: ED, M	^p 6/28	/16	
	Calc. B	y: ED	6/28	/16	
	Chkd. E	By: MP	6/28/1	16	

TEMP	<u>IN TRUCK</u>	BEHIND PAVER
8:00 AM	295°	280°
10:00 AM	290°	270°
12 NOON	305°	28 <i>5</i> °
2:00 PM	310°	290°
YIELD CHECKS:		
1. THEORETICAL	- TRUCK DUMP	ING DISTANCE, D
D = 12 TONS/TRU	JCK(2000 LBS/TON	1 <u>)(9 SF/SY) =</u> 107 FT/TRUCK
12'(1	12 LBS/SY-IN) (1.	.5")
2. THEORETICAL	TONS PER ST	ATION, T _S
T _s = (12' X 100')	(112 LBS/SY- <mark>I</mark> N)(1.5") = 11.2.TONS
(9 SF/S	Y)(2000 LBS/TON	0
3. DAILY TOTAL	YIELD CHECK:	
THEO. = (12' X 7	7860')(112 LBS/S	Y-IN)(1.5") = 880.3 TONS
(9 SF/S	Y)(2000 LBS/TON	/)
TONS DELIVER	ED = 897.9 (SE	E TICKET FILE)
YIELD = <u>I</u>	DELIVERED =	<u> 897.9</u> = 102%
Т	HEORETICAL	880.3
MAT'L INSP: PL	ANT REPORT, -	TICKETS & TEST
<u>70300100 SH(</u>	ORT TERM PAV	T MARKING
WB STA 37+;	20 TO 115+50	
195 SKIP-DA	SHES x 4' EAC	H = 780'

PG. 67



Date Septem	ber 7, 20:	16	Contract No. 90	632				Mix D	esię	gn No	8	35PCC6427
Pay Item No. and	Descriptior	¹ 420	00400 PCC PA	VEMEN	Τ9"							
Resident Mat	t Young			Contr	actor _	A1	Со	nstr	uC	tion	Co	mpany
Inspec	ctors		Visitors		We	eath	er	Time	;	Т	emp	. Conditions
Amber Weiser	2				7:00	٨١	M 7	0	Sunny, Dry			
Steve Blakeney Noon								8	1	Sunny, Dry		
Todd Richardson3:00 PM85Sunny, Dry								Sunny, Dry				
					-		-					
Start Sta	а.		End Sta.	Dista	nce		W	idth				Sq. Yds.
1508+00		1516+0	00	800.0 f	t	х	24	ft	х	1/9	=	2133.3
						Х			х	1/9	=	
						Х			х	1/9	=	
						Х			Х	1/9	=	
						Х			Х	1/9	=	
						Х			Х	1/9	=	
Cor	tractor's P	aving E	quipment						۲ru	cks		
Spreader				Non-a	gitating	J		<u> </u>	′es		No	
D	Calesoa			A				∇	100		No	

Spreader		Non-agitating	🗌 Yes 🔲 No
Paver	Gomaco GP – 2500	Agitating	🛛 Yes 🗌 No
Tining Maching	Gomaco T/C - 600	Average Haul Time	20 Min
Curing Sprayer			

Rebar Lap Detail	Rebar De Tie Bar	•		
	Daily Yield			
Required Volume	2133.3 (Total sq. yds.) x .75 (Thickness in feet) 3	=	533.3	Cu. Yds.
Used Volume	61 No. of batches or truck (x) 9 cu. yds/batch or truck	=	549.0	Cu. Yds.
Surplus	$\left(\begin{array}{c} -\frac{549 (\text{Used}) - 533.3 (\text{Req'd.})}{533.3 (\text{Req'd.})} \end{array}\right) \qquad (x) 10$	= 00	2.94	% Surplus

		Membr	ane Curing			
Туре	Type II	Inspection	LA - 15			
Required Gallons	800 (I	_) x 24 (W) x 2 (A	Applic.)	=	153.6 Gals	ls.
l toquirou ounono		250 Sq. ft./gal.				
Used Gallons	3 Barrels (x) 55 Gals.	/Barrel		=	165.0 Gals	ls.

					Те	sts					
Station	% Air	Slump	Beams/ Cylinders	Conc. Temp.	Air Temp.	Station	% Air	Slump	Beams/ Cylinders	Conc. Temp.	Air Temp.
1508+00	06.50	2 ¾"	6	76	70						
1509+00	05.20	2 ½"		78	75						
1509+85	05.30			78	77						
1510+70	05.70	3"		80	79						
1511+55	05.90	2 ¾"		80	80						
1512+40	06.10	3"	4	83	80						
1513+25	05.90			83	81						
1514+15	05.90	3"		84	85						
1515+50	06.00	2 ½"		84	88						

Remarks	
Formulas for the yield Check	
station – station = length	
$(length \times width \times depth) / 27 = CubiC Yard$	

Calculations / Measurements / Misc.							
Yield Checks		Depth Checks					
1) From Sta. 1508+00 - 1510+00	<u>135.0</u>						
Actual = 135.0 Cuyd	133.3 × 100 = 101.3%	@1508+25	9" – EOP				
Theo.= 133.3 Cuyd			9 ¾ " – Lane Line				
			9 ½ " - EOP(North)				
2) From Sta. 1508+00 – 1512+00	<u>270.0</u>	@1510+75	9 1/8 " – EOP				
Actual = 270.0 Cuyd	266.7 × 100 = 101.2%		9" – Lane Line				
Theo.= 266.7 Cuyd			9 3/8" - EOP (North)				
3) From Sta. 1508+00 to 1514+00	<u>423.0</u>	@1513+25	9" – EOP				
Ąсtual = 423.0 сиуd	400.0 × 100 = 105.8%		9 3/8 " – Lane Line				
Theo.= 400.00 Cuyd			9 ½ " - EOP (North)				
4) From Sta. 1508+00 to 1516+00	<u>549.0</u>	@1515+75	9 ¼ " – EOP				
Ąctual = 549.0 сиуd	533.3 × 100 = 102.9%		9" – Lane Line				
Theo.= 533.3 Cuyd			9 ¾" – EOP (North)				

Measured by:	AMW	Date:	09/07/16
Calculated by:	AMW	Date:	09/07/16
Checked by:	Dem	Date:	09/10/16



Date June 2	0, 2016	6 Contract Number			er <u>7</u>	0812	Mix D	esig	jn No. 👔	B6 BI	T 15	j36
Payment Item N	o. & Desc	ription	40603360) Hot-Mix A	spha	lt Surface	e, Mix I	E, 1	V 50			
Resident John Preston					С	ontractor 🟒	AI Cons	tru	iction (Comp	any	
Inspe	ectors]	Visitors		Weather	r Tim	e.	Temp.		conc	litions
John Dough			Bill Cm	ith, F.E.		Troutino	6:30A		65° F	Sun		
Robert Fell			0/11 511/				2:30P		90° F	Sun		
Robere l'ell							2.301		20	Buil		
<u></u>			J [
Start Sta.	End	Sta.	Mat Width	n Mat Thick		Tons P	laced Tod	av	920.6 to	ons		
WB 37+20	115+80		12 ft.	1.5 inch			Tons Tod					
						+/-	Tons Tod	lay	+19.4 to	ons		
						Da	aily Yield (%)	102%			
						Cumulat	ive Yield (%)				
				ontractor's Pa	ving E	quipment						
Paver			r-Greene S				Reed Tach	_				
Mat'l Transfer D				lebuggy 2500								
Breakdown Roll	er	Dynar	DAC CC 42A				Reed Tach	2	2400VPM	Amplitu		
Vibratory Roller	-	The State	_				Reed Tach	_		Amplitu	ide	
Pneumatic Rolle	er	Ingrat						_				
Finish Roller		Gallio	n vos 2-66 <u>E</u>	3, Static Mode	;							
Max Vib.	2400	VPI	М		Ma	x. Paver	240		ft/min			
Roller Speed			=	240 ft./mii		eed	240 9		X	.9	= 2	4 ft/min
Nollel Opeed	10	impact	5/1001		Οp	eeu	9	pa	asses			
Time of Temp. 8	Speed	8:00 🖌		10:00 AM	1	2 Moon	2.00	5	M	T		
Temp. in Truck	k Opeeu	295°	₹ [*]	<u>290</u> °		12 Noon 2:00 PM 305° 310°						
Temp. Behind P	aver	295 280°		<u>290</u> 270°		.85°	290			-		
Paver Speed		23 ft/1	min	20 ft/min				.3 ft/min				
i arei opeea		25 41	()()	20 19 1111	2		2	911	,,,,,			
			(200	0 lb/ton) (9 sf/sy	(12 to	on/truck)	-					
Theo. Truck Dur	nping Dist	ance –	· ·	114.7 lb/in/sy) (1	/ \	,	=		10	4.6 ft/ti	ruck	
			(;	(1) (1) (1) (1) (1) (1) (1) (1) (1) (1)		12 11)						
	Rol	ling Pat	tern		Daily	/ Total Yield	Check (a	ddť	l checks	on reve	erse	side)
4 Passes 1	Requir	red c	over ea	Ch	The	0: (12 C+	V 7960 (` +1	() (15 V (: 	75) (1.5 in)
11400001						<u>(12 FC</u>						<u>/ (1.J III)</u>
point therefore 9 Passes for					(9 S f	·/S>	/)(2000	b/tor	ר)			
			=	= 901.2 tor	ns requi	rec	t					
Full Mat Width						-						
					Del	ivered 🌶 p	laced: 9	20	.6 tons			
							-					
						920.6						
					Yiel	$d = \frac{920.6}{901.2}$	X 100 =	: 10)2%			
						701.2						
1					1							

	Total Running Yield Checks										
Starting St	tation:								-		
Time	Total Tons Place	Check Station	Length Placed (1)	Theo. Tons (2)	Yield % (3)	Time	Total Tons Placed	Check Station	Length Placed (1)	Theo. Tons (2)	Yield % (3)
10:00 AM	303.0	63+00	2580 ft.	295.8	102.4%						
12 Noon	608.7	89+20	5200 ft.	596.2	102.1%						
1:00 PM	766.8	102+70	6550 ft.	751.0	102.1%						

Length Placed = Starting Station – Check Station
 Theo. Tons = (Length x Mat Width x Lbs./Sq. Yd. X Mat Thickness) + (9 x 2000)
 Yield % = (Total Tons Placed ÷ Theo. Tons) x 100

Surface Variations								
Tested by: <i>RS</i>		Station/Location	Station/Location	Station/Location				
Check one be	elow:							
None found today								
Found variations & finish correct variations	roller was able to							
Found variations that re- action or deduction.	quire corrective							

Short Term Pavt. Mkg. (Item No. <u>70300100</u>)		Remarks
STA. 37+20 to 115+50		
Required: 4 ft. every 40 ft.		
\rightarrow Counted 195 skip dashes		
at 4 ft. each = <u>780 ft.</u>		
	1 1	

	Calculations / Measurements / Misc.					
Moasurad by:			Data			
Measured by:	дД, <i>R7</i> ДД		Date:	6/20/16		
Calculated by:	₽₽		Date:	6/22/16		
Checked by:	R7		Date:	6/22/16		

PG. 115

STA

37+05

37+05

43+50

53+60

68+10

QC/QA

CYLINDER

SERIES

NONE TAKEN

"

"

"

"

P1-A / P1-C

P1-B / P1-D

	NT PATC					DATE: 8/1		╎┼┼┦┼┼
1IX DES	IGN NO	71PCC010	8			WEATHER:	SUNNY	
REENE	READY I	<i>ніх - сн</i>	ICAGO, IL			77° @	8:00 AM	
						81° @	10:00 AM	
				REVS			QC/QA	QC/QA
TICKET	ВАТСН	ARRIVE	DEPART	INITIAL	ВАТСН	QC/QA	SLUMP	CONC
NO·	TIME	TIME	TIME	/FINAL	УD ³		INCHES	TEMP
83695	7:45 AM	8:05 AM	8:30 AM	110/170		3.8/3.5	2.1/2.3	NONE TAKE
	AIR ENTR	AINMAENT	ADDED - 8	οz		4.5/4.7	2.8/3.2	74/74
83700	8:10 AM	8:30 AM	8:45 AM	120/137		5.0/4.9	2.6/2.8	NONE TAKE
83704	8:30 AM	8:50 AM	9:10 AM	117/140		NONE TAKEN	NONE TAKEN	
83707	9:15 AM	9:37 AM	10:05 AM	114/159		NONE TAKEN	NONE TAKEN	"
83711	9:55 AM	10:15 AM	10:45 AM	119/149		5.2/5.4	2.8/3.2	80/80
SPECTO	R5:							
ANNE R	UIZ							
STEPHE	N WRIGH	Г						

т ' 19



E-mail

Agreement on Accuracy of Plan Quantities

Contract Number 61N07	District 5	Vietting Date
Route		County
		Champaign 🔽
Project Number		Job Number
Section Number		

Quantity	Unit	Pay Item	Code Number
quantity	Acre	Tree Removal Acres	20100500
34,960	Cu Yd	Earth Excavation	20200100
	Cu Yd	Channel Excav	20300100
	Cu Yd	Rock Excav Channel	20300200
	Cu Yd	Furnished Excavation	20400800
	Cu Yd	Gran Embank Spec	20600200
	Cu Yd	Trench Backfill	20800150
	Sq Yd	Compost Furnish & Place	211018
	Cu Yd	Topsoil Excavation & Place	21101505
	Acre	Mowing	25000750
11.8	Acre	Seeding CL 2	25000
	Acre	Mulch Method	25100
	Sq Yd	Erosion Control Blanket	25100630
	Sq Yd	Processing Modified Soil	3020
	Cu Yd	Sub Gran Mat A	31100200
	Sq Yd	Sub Gran Mat A	31100
	Cu Yd	Sub Gran Mat B	31101100
	Sq Yd	Sub Gran Mat B	31101
	Cu Yd	Sub Gran Mat C	31102000
	Sq Yd	Sub Gran Mat C	31102
	Sq Yd	Stab Sub-Base 4	31200100
	Cu Yd	Agg Base Cse A	35100110
	Sq Yd	Agg Base Cse A	3510
	Cu Yd	Agg Base Cse B	35101500
	Sq Yd	Agg Base Cse B	3510
	Sq Yd	Proc Soil-Cem BC	35200
	Sq Yd	Hes PCC Bse Cse	3530
	Sq Yd	PCC Bse Cse	35300
	Sq Yd	PCC Bse Cse 16 ½" - 10 ½"	35300800
	Sq Yd	PCC Base Cse W	35400
	Sq Yd	Hes PCC Bse Cse W	3540
	Sq Yd	HMA Base Cse	3550

Quantity	Unit	Pay Item	Code Numbe		
2,464	Sq Yd	q Yd HMA BC Wid 10			
	Sq Yd	HMA BC Wid 8	35600708		
	Sq Yd	Base Cse Wid	35650		
	Sq Yd	Preparation of Base	35800100		
	Cu Yd	Agg Surf Cse A	40200200		
	Sq Yd	Agg Surf Cse	40200		
	Sq Yd	HMA Pavt FD	4070		
	Sq Yd	PCC Pvt	42000		
	Sq Yd	Hes PCC Pvt	4200		
	Sq Yd	Welded Wire Reinf	42000060		
	Sq Yd	Protective Coat (pavement)	42001300		
	Sq Yd	Cont Reinf PCC Pvt	42100		
	Sq Yd	C R Hes PCC Pvt	42100		
	Sq Yd	Pavt Reinforcement	42100615		
	Sq Yd	Pavement Removal	44000100		
	Sq Yd	Driveway Pavement Removal	44000200		
	Cu Yd	Aggregate Shids A	48100200		
	Sq Yd	Aggregate Shids A	4810		
	Sq Yd	HMA Shoulders	4820		
	Sq Yd	PC Concrete Shoulder	48300		
	Cu Yd	Structure Excavation	50200100		
	Cu Yd	Conc Struct	50300225		
	Cu Yd	Conc Sup-Str	50300255		
	Cu Yd	Seal Coat Conc	50300265		
	Cu Yd	Concrete Handrail	50300275		
	Cu Yd	Concrete Encasement	50300280		
	Sq Yd	Protective Coat (structures)	50300300		
	Sq Ft	Prec Conc Br Slab	50400105		
	Sq Ft	PP Conc Dk Bm DP (11", 17", 21", 27", 33")	50400		
	Ft	F & E P P Con I-BM (36", 42", 48", 54")	5040		
	Pound	Reinforcement Bars	50800105		
	Pound	Reinf Bars, Epoxy CTD	50800205		
	Sq Yd	Slope Wall	51100		
	Cu Yd	Conc Box Cul	54003000		
	Sq Ft	Membrane Waterproof	58000100		

[Quantity	Unit		Pay Item	Code Number
ł		Cu Yd	Conc-Strut-	GJR 7/10/23	50300225

We hereby agree that when the project is constructed essentially to the lines, grades and dimensions shown on the plans, no further measurement will be required for the above items and payment will be made for the quantities shown in the contract except that if errors are discovered after work has been started, appropriate adjustments will be made.

When the plans have been altered or when disagreement exists between the Contractor and the Engineer as to the accuracy of the plan quantities, either party shall, before any work is started which would affect the measurement, have the right to request in writing and thereby cause the quantities involved to be measured as specified. PLAN QUANTITY CHECK

EXAMPLE 20200100 EARTH EXCAVATION, PLAN = 34,960 CY

- SPOT CHECKED EXISTING GRADES. SEE FB #1 FOR
 - X-SECTIONS.
- PLAN X-SECTIONS VISUALLY COMPARED TO EXISTING GROUND \Rightarrow NO SIGN OF RECENT CONSTRUCTION
- DESIGN END-AREA VOLUME CALCS WERE CHECKED
- NOTE: UNDERCUT VOLUMES AND LOCATIONS ARE DESIGNATED ON THE PLANS AND WILL BE FINAL MEAS. BY BEFORE & AFTER X-SECS.
- . ACCEPT PLAN QTY.

25000200 SEEDING CL 2, PLAN = 11.8 ACRE

- STA 1034+20 TO 1108+12 = 7,392 FT., WIDTH = 34 FT.
- SEEDING AREA = $\frac{7,392 \text{ ft. } x \text{ 34 ft.}}{43,560 \text{ sf} / \text{acre}} x 2 \text{ sides} = 11.5 \text{ acres}$
- DIFFERENCE = 0.3 ACRE. ROUGH CALC NOT INCLUDED GROUND SLOPE.
- . ACCEPT PLAN QTY.

35600716 BIT CONC BC WID 10, PLAN = 2,464 SY PLAN WIDTH = 1.5'

AREA = 2 sides × 1.5' × 7,393' × 1/9 = 2,464 SY ... ACCEPT PLAN QTY.

50300225 CONC STRUCT, PLAN = 383.5 CY CALC. QTY = 378.1 CY (SEE CALC FILE #4)

DIFFERENCE = 5.4 CY @ \$425/CY = \$2,295 .. NOT OK

\rightarrow CONTRACTOR NOTIFIED BY LETTER ON 9-7-16

CALC BY: BC 9-7-16



Inspector's **Daily Report**

Section

County

_				Route	B
Date <u>9-21-16</u>		Initial(s)	Date	District	10-18
\frown	Inspected by:	JCS	9-21-16	Contract No.	
Contractor & Sub. Careful Const.	Measured by: Calculated by:	<u> </u>	9-21-16	Job No.	
Weather <u>Hot-Humid 90's</u>	Checked by:	DEM	9-21-16 9-22-16	Project	51

	Item Code #	Fund Code (Opt.)	ltem	Location	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book				
	20200100		Earth Excav.	16 + 20 Lt.	1709.8CY	N/A					
23											
	This is: $$ an estimated progress measurement (item no.: 20200100)										

a final field measurement (item no.:

> (e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours Remarks: worked) Use reverse side, if needed.

Trailer – $(6.9ft \times 23.0ft \times 3.6ft)/27 = 21.2Cy$ Tandem - (6.9ft × 14.4ft × 3.6ft)/27 = 13.2Cy 80 $(oads (tandem) \times 13.2Cy \times 80\% = 844.8Cy$ 51 loads (trailer) \times 21.2Cy \times 80% = 865.OCY Total 1709.8CY

BC 628 (Rev. 8/04)



Inspector's Daily Report

Section

County

				Route	B
Date <u>7-26-16</u>		Initial(s)	Date	District	10-10
	Inspected by:	RG	7-26-16	Contract No.	
Contractor or Sub. <u>ACME Construction</u>	Measured by:	RG	7-26-16	Job No.	
	Calculated by:	RG	7-26-16		
Weather <u>Clear, 90⁰</u>	Checked by:	MF	7/27/16	Project	5

Item Code #	Fund Code (Opt.)	Item	Location	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book				
20200100		Earth Excavation	2 + 60 to 17 + 00	8372 CY	NA	\checkmark				
This is: $$ an estimated progress measurement (item no.: 20200100										

F - 24

a final field measurement (item no.:

Remarks: (e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours worked) Use reverse side, if needed.

By Count: 490 Loads hauled, 70 Loads each Equipment: 4 Terex's (TR45) \Rightarrow 3 Cats (621G) TR45: 4 × 70 Loads × 25.6 CY/Load × 80% = 5734 CY 621G: 3 × 70 Loads × 15.7 CY/Loads × 80% = <u>2638CY</u> Total = 8372 CY



Inspector's Daily Report

County

				Route	-8
Date <u>8-9-16</u>		Initial(s)	Date	District	10-18
Contractor or Sub. <u>TONKa CONStruCtion</u>	Inspected by: Measured by:	TB L AG	8-9-16	Contract No. Job No.	
Weather Sunny 80°	Calculated by: Checked by:	TB AG	<u>8-9-16</u> 8/12/16	Project	ST

	Item Code #	Fund Code (Opt.)	ltem	Location	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book
	20700220		POROUS GRANULAR	STA 124+20 \rightarrow 126+10 RT	92.3 CY	Approved Source & Tickets	\checkmark
			EMBANKMENT	128+70 $ ightarrow$ 129+50 RT			
F - 2					Note: Final payment for PGE must be based on before and after measurements and calculations.		
25							
	This is: √ an	estimated	progress measurement (item	no.: 20700220)	

a final field measurement (item no.:

Remarks: (e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours worked) Use reverse side, if needed.

20700220

PGE DELIVERED – FROM TICKETS: 153.8 TONS CONVERSION FACTOR: 1.5 TON/CY (FROM MISTIC PAY ITEM/ MATERIAL CONV. FACTOR REPORT) PAY 90% FOR ESTIMATED (153.8 T/1.5 $^{T}/_{CY}$) X 0.90 = 92.3 CY

Illinois Department of Transportation
--

Inspector's **Daily Report**

Section

County

Ŭ						Route	3
Date <u>7-26-16</u>				Initial(s)	Date	District	
Contractor or Sub.	<u>No Jo</u>	oke Supply Co.	Inspected by: Measured by: Calculated by:	<u> </u>	7/26/16	Contract No. Job No.	
Weather <u>HOt</u> , I	Humid, H	агу	Checked by:		7/28/16	Project 5	
Item Code #	Fund Code (Opt.)	Item	L	ocation	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book
50800105		Rebar	Sta. 15	+ 53	5886 lb.	List + Cert + Mark	\checkmark
					5851 6		

			Rf.		
			5851 lb		
50300225	Concrete Structures	Sta. 15 + 53	38.7 CY	Daily Plant Reports & Tickets & Test	<u>√</u>
This is: $$ an esti	mated progress measurement (iten	n no.: 50800105, 50	300225)	

a final field measurement (item no.:

Remarks:

(e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours worked) Use reverse side, if needed.

Conc. Struct. – 43 CY delivered x 90% = 38.7 CY $\sqrt{}$ Rebar Factor – $\frac{60,770 \text{ lb}}{151.2 \text{ lb/Cy}} = 151.2 \text{ lb/Cy} \sqrt{100}$ 402 CY

38.7 CY × 151.2 lb/CY = 5886

Note: 60,770 lbs of rebar and 402 CY of concrete are the plan quantities for this structure taken from the Bill of Materials shown on the plans.



Inspector's Daily Report

Section

County

				Route	B
Date <u>9-27-16</u>		Initial(s)	Date	District	10-10
	Inspected by:	GEB	9-27-16	Contract No.	
Contractor or Sub. <u>SUPERIOR</u>	Measured by:			Job No.	
	Calculated by:	GEB	9-27-16		
Weather HOT-HUMID 90's	Checked by:	RLS	9-27-16	Project	6

	Item Code #	Fund Code (Opt.)	Item	Location	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book
	55019500		SS 1 RCP CL 4 12	STA 9+00 TO 9+50	45.0 ft.	List & Mark; (Conc. Structures Inc.)	\checkmark
27							
	This is: $$ an	estimated	progress measurement (item	no.: 55019500)	

a final field measurement (item no.:

(e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours worked) Use reverse side, if needed. Remarks:

7.5 ft per section \times 6 sections= 45.0 ft

				PAY	TOTAL				+++++++	
				THIS	TOTAL	CALCI		CHCK D	++++++	+++++
DATE				DATE	DATE	BY	DATE	BY	DATE	D.Q. #
VAIL				VAIL	VAIL	Dr	VAIL	DY	VAIL	ν.α. #
9/20/16	INITIAI	SETUP		0.25	0.25	MRM	9/20/16	JGL	9/20/16	2
10/7/16	10 0	AYS	x 0.65 =	0.12	0.37	"	10/7/4/		40/7/4/	29
		DAYS	X 0.05	0.12			10/7/16		10/7/16	29
11/4/16	28 D	AYS	x 0.65 =	0.18	0.55		11/4/16			104
	100 L						11/4/10	<i>70</i> M	11 3416	104
12/2/16	28 L	AYS	x 0.65 =	0.18	0.73	"	12/2/16	JGL	12/2/16	223
	100	DAYS								
12/15/16	ALL TC	REMOVE	D	0.27	1.00		12/15/16	7 CM	12 15 16	247
	PAYB	ALANCE					12.7 107 10			
E: The fir										
ororated 65 10% for th					nd the					
					I	ALI	. SIGNS & BA	RRICADES	CONFORM TO	SPECS

F - 28



Inspector's Daily Report

Section

STA. 2+00 80'L

STA. 6+00 80'R

BC 628 (Rev. 8/04)

County

				Route	B	,
Date <u>July 18, 2016</u>		Initial(s)	Date	District		12
	Inspected by:	JMS	7-18-16	Contract No.		
Contractor or Sub. <u>ACME Const. Co.</u>	Measured by:	JMS & 7ER	<u> </u>	Job No.		
Weather Sunny Low 70's	Calculated by: Checked by:	<u> </u>	7-19-16	Project	51.	
Fund			Quantity			Posted

Item Code #	Fund Code (Opt.)	Item	Location	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book
21101505		Top Soil Exc. & Place	Sta. 2+50 TO 7+00	1449.1 C.Y.	None, topsoil taken from	
					Within R.O.W.	
This is: 🖂 a	n estimated	d progress measurement (item	no.: 21101505)	

F - 29

a final field measurement (item no.: (e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours Remarks: worked) Use reverse side, if needed. Sta. 36,250 C.F. Sta. End Areas Sta. 7+00 +42,000 C.F. 5+00 1.) 80' × 1.5' = 120 S.F. 2+50 2.) 85' × 2.0' = 170 S.F. 78,250 C.F. ÷ 27 = 2898.1 C.Y. 3.) 125' × 2.0' = 250 S.F. 18"deep 24"deep 80, 24"deep 125' V_1 85, V_2 Volumes 2898.1 C.Y. × 0.50 = 1449.1 C.Y. V1 = 120+170 × 250' = 36,250 C.F. Will pay remaining 50% upon 2 V₂ = 170+250 × 200' = 42,000 C.F. placement of topsoil later. NOTE: Stockpiled @

Pay	Code	Pay Ite	em							Plan QTY		Units				County:	WIL	LIAMS	ON					
4420	0970	CLASS	S B PAT	CHES,	TYPE	II, 10 I	NCH			260.0		sy				Section:	(X1-	4)81 La	ake Ci	reek				
4421	Contraction of the second	SAW C				Ĺ				1470.0		ft				Route:		RTE 57						
																District:	9							
Thick	kness	10	inches		-											Contract:	9863	34	-				-	
-		10000			-											Job No:		-088-0)6	-			-	
Notes:					-						-			-		Project:				1			-	
	157: RL - R	amnlane	PL - Passi	ing Lane DI	L - Drivir	nglane 9	SB - South	hound I	I NB - North Bo	und						1 10,000				-			-	
	~	100 000 00	Sec. 1. and 1.				1 m m			We will a set data contains	eas, depth of the a	I actual natch	l if contractor i	indercuts e	l visting nav	t without car	USP	-	-				-	
	11 IN 11 IN 11	0	Print the InduAtion	n & length o	55 CH 106 P	10 CO	5.0		ig in change.							E without out	1		-				-	
									al measi	urements.)	i					-		-		-			1	
8 6	(00010	conning		iginal M				ungn			5			Fin	al Meas	uremen	ts	R 3	1	G2			<u>a</u>	
s		2		gina in	l	emen	.0				% Change			(3)			T			6	2		1	
(1)	04-	Datak	100	Length	Mor		io ntiti o	- (au)	(2) Avera	age Depth		100.146	Lawath	10.000	Quan.	Final	l na		ntitioo	(01)	Saw	Dowel	Eine	al Meas.
Lane	Sta	Patch	wiath	Length	IVIAL	kea Qu	lanutre	5 (SY)	(inc	ches)	in	wiath	Length	Min.	Adj.	Area	Га	y Quai	nuues	(sy)	Cuts	Bars	Fille	a weas.
											Thickness	(54)	(51)	Area							(54)			
		#	(ft)	(ft)	TYI	TYI	TY III	TY IV	Pav't	Patch	%	(ft)	(ft)	(sy)	(%)	(sy)	IYI	TYII	IYIII	IYIV	(ft)	(ea)	By	Date
	100	100000000	bound																		_			
174-360-6609-2603260	193+35	17	9.0	12.0		12.0			15.00	15.00	50.0	9.1	12.0	12.0	0.20	14.4		14.4			54	20	BWC	7/12/07
	192+33	-	6.0	12.0		8.0																		
NBDL	189+80	19	8.0	12.0		10.7			16.00	16.00	60.0	8.2	12.0	10.7	0.20	12.8		12.8			52	20	BWC	7/12/07
NBDL	188+80	20	7.0	12.0		9.3			16.00	16.00	60.0	7.0	12.0	9.3	0.20	11.2		11.2			50	20	BWC	7/12/07
NBDL	187+80	21	6.0	12.0		8.0			16.00	16.00	60.0	6.0	12.0	8.0	0.20	9.6		9.6			48	20	BWC	7/12/07
NBPL	187+80	1.8.282-	6.0	12.0		8.0		-		C2.0000.02	500.000	104/1020	0.025466	8504587	21420.000	1000008		07.4290	-	• · · ·	480	0.000	Sector Press	×
	187+15	100772	6.0	12.0		8.0	-		16.00	16.00	60.0	6.1	12.0	8.0	0.20	9.6		9.6	-		48	20	กษต	7/12/07
	187+15		6.0	12.0	-	8.0			10.00	10.00				0.0	0.20	0.0		0.0	-	-			Lora	1/12/01
	185+75		6.0	12.0		8.0			16.00	16.00	60.0	6.1	12.0	8.0	0.20	9.6		9.6	-	1	48	20	กษต	7/12/07
NBPL	185+75		6.0	12.0		8.0	-		10.00	10.00	55.5	5.1		0.0	0.20	0.0		0.0				20	Lora	1/12/01
	185+38		6.0	12.0		8.0			16.00	16.00	60.0	6.1	12.0	8.0	0.20	9.6		9.6		1	48	20	กษต	7/12/07
	185+38		6.0	12.0		8.0			10.00	10.00		2.,		0.0	0.20	0.0		0.0					Dora	1/12/01
1. S. S. T. S. S. T. T.	182+80		6.0	12.0		8.0	-							1	1				-				2	
	182+80	1.000	6.0	12.0	-	8.0	2	-		- FOR	R EXAM	PLE (ONLY	′									•	2
	181+80		6.0	12.0	-	8.0								-									-	
	181+80		6.0	12.0		8.0				🗏 The	Depart	tmen	it doe	es no	ot pro	ovide	e. no	or a	ppr	ove			-	
	181+28		6.0	12.0	-	8.0											·		•••				-	
	177+15		9.0	12.0		12.0				anv	electro	onic s	prea	dshe	ets.	It is t	the	resi	pon	isibi	litv		+	
	176+21		6.0	12.0		8.0															1		+	
Participation of the second second	175+15	152-24-2	6.0	12.0	-	8.0				🗏 of tl	he Resi	dent	to er	isure	e the	accu	irad	CV O	t ar	۱V			-	
Contraction of the second	175+15	101-10-101-	6.0	12.0	-	8.0				19-10								· ·		· ·			-	
	174+20		6.0	12.0		8.0				spre	eadshee	et he	/she	choo	oses '	to us	se, i	nclu	Jdir	ng ai	ny		+	1
	174+20		6.0	12.0	1	8.0				-			-							0	1		+	
	173+58		6.0	12.0	-	8.0				🗏 torr	nulas tl	nat m	hay b	e em	ibed	ded i	ın t	he					+	
	173+58		6.0	12.0		8.0																	1	
	172+85		6.0	12.0		8.0				spre	eadshee	et. NI	EVER	use	any	sprea	ads	nee	t th	iat y	ou			
	172+25		6.0	12.0		8.0				-					-								1	
Participation of the second second	171+25		9.0	12.0		12.0				– nav	e not cl	necke	ed to	r acc	curac	у.							-	
	171+25	122.077	9.0	12.0	-	12.0										-							-	
	170+20		9.0	12.0		12.0				-						1	_			1			-	<u> </u>
	170+20		6.0	12.0	+	8.0											1	-	+	1			-	
					0	272	0	0	İ					64.00		76.80	0	77	0	0		1000000		
-		otal	S		-		272										1 -		77	-	348	140	-	+

Bar	Bar Size	No. of Bars In Place	Length (ft-in)	Length (ft)	lb/ft *	lb	Subtotals (Ib)	Is	
а	9	64 √	16 ft 3 in	16.25	3.400	55.25	3536.00 lk	lb	
a1	9	64 √		6.5	3.400	22.10	1414.40 lt		
a2	9	32 🗸	12 ft 9 in	12.75	3.400	43.35	1387.20 lt	lb	
h	7	70 √	••	6.67	2.044	13.63	954.34 lb		
h1	7	28 🗸	6 ft 8 in	6.67	2.044	13.63	381.74 lb	b	
h2	6	36 √	5 ft 9 in	5.75	1.502	8.64	310.91 lb		
h3	6	10 🗸		8.75	1.502	13.14	131.43 lb		
h4	5	204 🗸	3 ft 6 in	3.5	1.043	3.65	744.70 lb	FOR EXAMPLE ONLY!	
۷	7	21 √		10	2.044	20.44	429.24 lb		
v1	7	12 🗸	8 ft 6 in	8.5	2.044	17.37	208.49 lb		
Х	6	4 √	3 ft 9 in	3.75	1.502	5.63	22.53 lb	approve, any electronic spreadsheets.	
per table (Art 508.07)Total = 9520.98 lbis the responsibility of the Re ensure the accuracy of any s he/she chooses to use, inclu formulas that may be embed spreadsheet. NEVER use any spreadsheet that you have no for accuracy.									
		ncrete facto	9520).98lb / 3′	1.0 Cy =	307.1 1)/су		
	-								
	r a bar	16/ <i>ft</i> 16	10.0	E 4 4 0 1			=	Initials Date	
	ength x i	lb/ft = lb	10.2	5 ft x 3.4	10 = 55.2	מו כ		Prepared by: BCA 10/10/16	
Le	-							Prepared by: BCA 10/10/16	

333



Item of Material

Print Form Reset Form

Material Allowance Affidavit

	Contract Number 94270	District 7	Letting Date 07/10/23
	Route FAI 57		County Jefferson
	Project Number		Job Number
	Section Number		
Itemized Material	Statement		
Quantity	Unit Cost		Amount
8	\$2,640.00		\$21,120.00

\$21,120.00 Subtotal I hereby certify that the above material has been received \$702.47 Freight on Material and properly stored. Resident's Signature Date \$21,822.47 Total Allowed on Est. No. Proof of Payment Rec'd

AFFIDAVIT

John Smith

being first duly sworn, deposes and says that he is the duly authorized representative of the

Quality Contracting, Inc.

1. Mast Arms

Company and as such has authority to make the following statement: I hereby, certify that the material herein mentioned has been received and stored in a manner satisfactory to a representative of the Department of Transportation. Further, that said material is to be used for the purposes of constructing the Contract captioned above.

I further certify that the within statement is true and correct and that the purpose of this affidavit is to obtain payment for material in storage.

Contractor Signature Date	Ву
	John Smith
Notary Public	
State of Illinois	
County Jefferson	
Signed (or subscribed or attested) before me on Monday, Jul	ly 10, 2023 by (date)
John Smith	· · · · · · · · · · · · · · · · · · ·
(name/s of person/s) "OFFICIAL SEAL" MARY JONES Notary Public, State of Illinois My Commission Expires 07/10/23	Signature of Notary Public
(SEAL)	My commission expires 07/10/23



Submit with Resident's Pay Estimate Report

Estimate No.

05

F-33

Statement of Material Allowances

E-mail Reset Form



Section Number

						Quantity			
1 Description of Material(F Pay Items it will be us		2 Unit	3 Receipted Bill Due	4 Receipted Bill Received	5 Total from Form(s) BC-49	6 Paid for in place to date	7(5-6) Remaining in storage	8 Contractor's cost/unit	9(7x8) Value
Mast Arms - 877029 MAA&P50	980 S	Each	11/15/16		8	0	8	\$2,727.81	\$21,822.48
- - -	2. Onc pay mat you t: When t of the ir	ment on the pr erial allowance r knowledge a he contractor i tvoice by the u	is paid on a evious contr e. Guardrail nd possibly t nvoice consi nit of measu	n estimate if n act. This may and Aggregat being paid for sts of several irement of the	nay not be used on a y not be possible if the te items are particula twice. components that ma pay item and calcula	nere is not sufficient Irly vulnerable to bei ake up a pay item su ate a unit price.	is it is first completely funds in that contrac ng removed to anoth ich as guardrail, divid or to receive his or he	t to deduct the ler project without le the total amount	
Add							Total value	e of material on hand	\$21,822.4

Original - Bureau of Construction

cc: District File Resident

By checking this box and typing my name below, I verify this document has been approved by the resident named below.

Date

Resident Name

Sam Cooke 07/10/23



Page 235

Item 40603310

Fund 33DC01

HMA SC "C" N50

Plan Quantity 3397.000

Unit Measure TON Contract Unit Price 77.08 **Quantity Sheet**

County 177 Stephenson

Section 20RS-1 & 20BR

Route FAP 5

District 02 Contract No. 84776 Job No. C-92-072-12

Project STPF-BRF-0005/050/000

AuthorizationsNumberDate App'vdAddDeductTotal810/13/1625.03,422.0999</

Cnty Const Sfty 177 I000 2A Quantity 3397.000

	Station to Station	C	uantities Plac	ed	Evidence of	Progress					
Date	Location or Description	This Date	To Date	Pay Est	Material Inspection	Document Source					
	Per Art. 406.13, the ,	Adjusted F	Plan Quanti [.]	ty is as follo	ows→						
	Avg. Bulk Specific Gra										
	$\frac{2.34 x 46.8}{112} \frac{G_{mb} x 46.8}{U} C =$	=	= 0.9	78							
	Adj Plan Qty = $0.978(3,397) = 3,322.3$ tons										
9/5/16	STA 62+03 $ ightarrow$ 118+27 NB	865.8	865.8		Daily Plant Rpt. &Tickets & Test	Tickets					
9/6/16	STA 118+27 → 175+79 NB	885.5	1,751.3								
9/7/16	STA 175+19 $ ightarrow$ 119+27 SB	861.0	2,612.3								
9/8/16	STA 119+29 $ ightarrow$ 62+03 SB	872.7	3,485.0	#5/3397							
9/12/16	Deduct for Max Pay	-63.0	3,422.0	#6							
			FINAL								
	Max. Pay = 3,322.3 to	ns x 1.03 =	3,422.0 tons	$\rightarrow Deduc_1$	t Pay Q t y						
	Quan. Placed 3,485.0	- Max. Pa	y 3,422.0 = [Deduct 63.0)						
	The surface was che	'ee FB #3, p. 35.									
Source of	documentation			•		•					
for final qu	uantity: Tickets										

For all tonnage items weighed on platform scales: Scales checked by Dept. Of Agriculture Date on decal 2016 Identification No. 074346 Scale Location General Plant 1, Rock Falls

Inspection Reports

Date	Mistic Report No. or Source or Manufacturer	Amount	Total to Date	Transferred to Other Code or Remarks
9/5/16	MI-305, Daily Bit Plant	865.8	865.8	
9/6/16	Output	887.5	1,753.3	
9/7/16		861.0	2,614.3	
9/8/16	•	875.5	3,489.8	



Inspector's Daily Report

Section

County

				Route	B
Date 9-22-16		Initial(s)	Date	District	10-10
	Inspected by:	JS	9-22-16	Contract No.	
Contractor or Sub. <u>B&M Constr.</u>	Measured by:	JS & D 7	9-22-16	Job No.	
	Calculated by:	JS	9-22-16		
Weather <u>Sun, 80⁰</u>	Checked by:	D7	9-28-16	Project	5

	Item Code #	Fund Code (Opt.)	Item	Location	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book
F - 36	42400100	07AU01	PC Conc. Sidewalk 4	RT 0+00-	2,500.0	Plant Report & Tickets & Test	\checkmark
				RT 5+00	SF		
	This is: 🔄 an estimated progress measurement (item no.:						

a final field measurement (item no.: <u>42400100</u>


(e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours Remarks: worked) Use reverse side, if needed.

<u>Depth Checks</u>					
STA 0+00	= 4.05"				
1.00	(1)				

 $\sqrt{}$

$$1+00 = 4.10$$

 $2+00 = 4.10^{\circ}$
 $3+00 = 4.05^{\circ}$



<u>Cross-Slo</u>	ope Checks
STA 0+00	= 1.9%
1+00	= 2.0%
2+00	= 1.9%
3+00	= 1.9%
4+00	= 1.9%
5+00	= 2.0%



Truck Tare Weights

Reset Form



Date	Contract Number	District	Letting Date
07/10/23	90210	5 •	07/10/23
Contractor	 Route	Co	unty
Trusty Hauling	FAI 57	Ch	nampaign 🔽
Scale Location	 Project Number	Job	Number
Gravel Group - Rantoul			
Material	 Section Number		
CA-6			

Print Form

Γ	Tr	uck or License Number	Name on Truck	Tare Weight	Driver in Truck?
-	1.	19	Peters	20,000.0000	🗙 Yes 📃 No
-	2.	44	Peters	20,500.0000	🗙 Yes 📃 No
-	3.	21	Peters	20,800.0000	🗙 Yes 📃 No
-	4.	22	Peters	21,000.0000	🗙 Yes 📃 No
-	5.	43	Peters	20,000.0000	🗙 Yes 📃 No
-	6.	40	Peters		Yes No
-	7.				Yes No
-	8.				Yes No
-	9.				Yes No
-	10.				Yes No
-	11.				Yes No
-	12.				Yes No
-	13.				Yes No
-	14.				Yes No
-	15.				Yes No
-	16.				Yes No
-	17.				Yes No
-	18.				Yes No
-	19.				Yes 🗌 No
-	20.				Yes No
		Add			

Note: Tare weights of trucks hauling material to Department of Transportation projects must be established daily when pay quantities are determined by platform scale weights.

Department of Agriculture scale certification information:

Date	Inspector			
07/10/23	Paul Kliner			
Certificate No.				
35044				
Resident				
Earl T. Jones				



Independent Truck Weight Check/ Action Report District

Instructions:

At random, select a loaded truck and obtain a loaded weight on an independent scale. Allow the truck to unload. Then obtain an empty weight. All information (except * fields) is required. E-mail your submission to: <u>DOT.ITWC@illinois.gov</u>. DO NOT SUBMIT FORMS MISSING INFORMATION.

See Construction Manual and Article 109.01 of the Standard Specifications Book for additional information.

Ticket Information						
Local Ticket Number	047488	Supplier Name	Cross Co	nstruction		
Loaded Weight (Gross) [*]	73,260	City	Urbana			
Empty Weight (Tare)*	28,180	Supplier Code	3916-03			
Local Ticket Weight (Net)	45,080	Scale Decal No.	006320			
		Decal Year	2016			
Independent Scale Inform	ation					
Loaded Weight (Gross)	73,260	Scale Location	Bunge(D	ump 2)/Danville	ł	
		Scale Decal No.	006151			
Empty Weight (Tare)	28,080	Decal Year	2016			
		Name of Truck	Gilbert			
Calculated Net Weight	45,180	Truck ID	456			
		License Plate	610 78 4	5	State	IL
Tolerance %	-0.22%	Contracts	90939			
(Ticket Weight - Ind. Wt. Ck.	Net Weight) / Ind. Wt. Ck. Net Wt. x 100	List all contracts using materials				
Aggregate		from this supplier this week.				
Tolerance for bitumin	ous should not exceed 0.50%					
Calculated By Matt A. Yo			Date	9/27/2016		
Weights Verified By Matt	Print Name Clearly		Date	9/27/2016		
	Print Name Clearly					
E-Mail Your Submission to: DOT cc: Contractor Resident District Office	Hard Copy Submissi Illinois Department o Bureau of Investigati 2300 South Dirksen	f Transportations and Con Parkway, Sp	npliance, ringfield, IL 62764			
		DO NOT SUBMIT A H HAS BEEN SUBMITT		F AN ELECTRON	IC COPY	



Date: 9/27/2016

Action Report

Contract Number: 90939

An independent Weight Check was performed today and passed. No further action is required.

An independent Weight Check was performed today and failed. Complete this form within 48 hours and send to the Bureau of Investigations and Compliance at DOT.ITWC@illinois.gov. If you have any questions, please contact (847) 221-3000. Thank you in advance for your cooperation.

Weight Check Re	eviewer: Matt A. Young		Phone Number: 217-555-0004
Supplier Name:	Cross Construction	City: Urbana	Phone Number: 217-555-1212

Report Action Taken to Correct Scale:

Resident Engineer: Matt A. Young

Phone Number: 217-555-0004

Note: Resident Engineer to receive a copy of Independent Weight Check and Action Report.



If the truck is out of tolerance the contractor may request the empty truck to be taken to another independent scale to verify the empty weight.

The contractor requests a check on independent scale, please fill out the information below.

	2 nd INDEPENDENT SC	CALE INFORMATION
Scale Location:		
Scale Decal No.:		
Decal Year		
Name of Truck:		
Truck ID:		
Empty Weight of True	ck:	
Remarks:		
	Submit by Email	Print Form

8-8-16 35100100 AGG BASE CS STA 1+20 to 19+00	ЕА 0. С
	24,300. +
Contract 90002	23,700. +
	22,300. +
	24,700. +
	23,500. +
	22,900. +
	25,500. +
	23,700. +
	23,800. +
	22,800. +
	24,000. +
Calc by: <i>JWS</i> 8-8-16 Check by: <i>RH</i> 8-9-16	23,100. +
заіс by: <i>JWS</i> 8-8-16 Сћеск by: <i>RH</i> 8-9-16	23,600. +
S 8 7 8	24,100. +
がみ	23,800. +
ř ž	24,300. + 23,400. +
d .≻ ∠	24,300. +
e c p	22,800. +
Ch	25,600. +
0 -	23,200. +
	24,000. +
	23,900. +
	547,300 *
	LBS
	547,300. ÷
	2,000 =
	2,000 *
	tons
Actual =	220.9 - 206.1 =
Moisture	206.1
	= 0.072
Pay Wt. =	
Fa) Wr	<u>273.65 × 1.06</u>
_	1.072
=	<u>270.6</u> TONS

Ticket Tape Example, Aggregate Base Course, Type A (English)

NOTE: Refer to Small Quantities provision in Section A of doc guide. No moisture correction <u>required</u> if less than 500 tons per day, however IDOT reserves right to perform moisture correction on any amounts delivered.

This is an example of the documentation requirement for granular pay items paid on a tonnage basis.

This adding machine tape is to be securely bound around the truck tickets for each pay item for each day.



Inspector's **Daily Report**

Section

County

				Route	B
Date <u>7-20-16</u>		Initial(s)	Date	District	10-10
	Inspected by:	KWH	7-20-16	Contract No.	
Contractor or Sub. <u>ACME Construction</u>	Measured by:			Job No.	
	Calculated by:	KWH	7-20-16		
Weather <u>Cloudy, 82⁰</u>	Checked by:	sym	7-22-16	Project	5 '

Item Code #	Fund Code (Opt.)	Item	Location	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book		
25000700		Agricultural Ground Limestone	Entire Job (20 acres)	83.5 tons	Tickets from approved aggregate source	\checkmark		
					List – Charleston Stone Co. @			
					Charleston, IL (Coles County)			
					West Pit, see wt. tickets in			
					File #6 (list & tiCk)			
This is: an estimated progress measurement (item no.:								

This is:

Т 42

a final field measurement (item no.: 25000700

(e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours worked) Use reverse side, if needed. Remarks:

Plans require 4 Tons/acre to be applied to 20 acres

From "Agricultural Limestone Booklet" at http://www.idot.illinois.gov/Assets/uploads/files/Doing-

Business/Specialty-Lists/Highways/Materials/Materials-4-Physical-Research/Aggregate/2016LimestoneBook.pdf,

The 4 year conversion factor = 0.85

Total tons required = $4 \text{ T/aCre} \times 20 \text{ aCres} \times 0.85 = 68.0 \text{ Tons}$

Actual tons delivered = 71.0 Tons (see Tickets)

Pay Q_{ty} = 71.0 tons ÷ 0.85 = 83.5 tons (Max Pay 80 tons x 1.08 = 86.4 Tons)



Inspector's Daily Report

Section

County


				Route	-8
Date 9-13-16		Initial(s)	Date	District	10-10
	Inspected by:	KWH, SM	9-13-16	Contract No.	
Contractor or Sub. <u>Interstate LandsCaping</u>	Measured by:	KWH, S m	9-13-16	Job No.	
	Calculated by:	КWH	9-13-16		
Weather Sunny, 81 ⁰	Checked by:	sm	9-19-16	Project	G '

Item Code #	Fund Code (Opt.)	ltem	Location	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book
25000200		Seeding, Class 2	STA. 1 +00 TO	4.5 ACRE	Certificate of Seed Analysis From	
			19 + 00 LT.		Registered Seed Technologist	
25100105		Mulch Method 1	66 66	4.5 ACRE	Straw – Visual	
rion	Seed	675 lb. Delivered \rightarrow	Rate =900LB/4.5AC=200	LB/ACRE √		
alica's	Straw	9.0 Tons Delivered \rightarrow	Rate = 9.0T/4.5 AC = 2	Ton/Acre \checkmark		
APPRA						

This is: an estimated progress measurement (item no.:

a final field measurement (item no.: 25000200, 25100105

(e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours worked) Use reverse side, if needed.

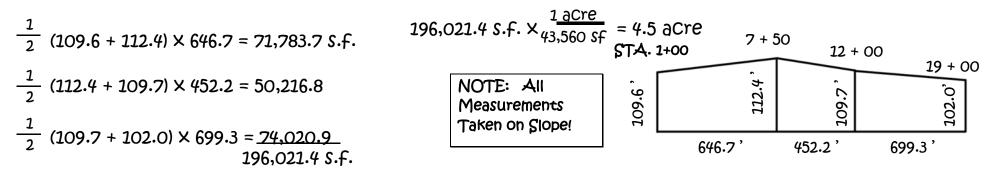

Remarks:





Traffic Control Surveillance Report

Print Form Reset Form

Contractor		Contract Number	Date		
General Contract	tor, Inc.		99999	09/14/16	
Time of Inspection	Signature	Weather	Comments and/or Corrective Action		
Midnight					
1 A.M.					
2 A.M.	Míke Jones	Light Rain, 50F	All Traffic Control good		
3 A.M.					
4 A.M.					
5 A.M.					
6 A.M.	Míke Jones	Light Fog, Calm, 50F	All Traffic Control good		
7 A.M.					
8 A.M.	↑				
9 A.M.					
10 A.M.			CONTRACTOR WORKED 8:00 am - 4:	30 PM	
11 A.M.			PAY: 15.5/24 = 0.65 CAL DAY		
Noon			CALC'D BY: REJ 9-15-16 CK'D BY: 9	AM 9-15-16	
1 P.M.					
2 P.M.					
3 P.M.					
4 P.M.	<u> </u>				
5 P.M.					
6 P.M.	Jack Hammer	Partly cloudy, 62F	Traffic control ok		
7 P.M.					
8 P.M.					
9 P.M.					
10 P.M.	Jack Hammer	Clear and calm, 46F	Moved barricade back in place, Traffic control o	k	
11 P.M.					

Distribution: Contractor Resident

Completed forms must be turned in to the Resident the next working day.



Inspector's Daily Report

Section

County

				Route	-8
Date September 6, 2016		Initial(s)	Date	District	10-10
	Inspected by:	WNP	9/6/16	Contract No.	
Contractor or Sub. <u>Artful Const.</u>	Measured by:	WNP L CJ	9/6/16	Job No.	
-	Calculated by:	WNP	9/6/16		
Weather Partly Cloudy, 76 ⁰	Checked by:	<u>JS</u>	9/12/16	Project	G '

Item Code #	Fund Code (Opt.)	ltem	Location	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book
50200100		Structure Excav.	Pier #2 @	239.4 CY		
			Sta. 47 + 23.61			

- 45

П

This is:


Remarks:

 $\sqrt{}$

] an estimated progress measurement (item no.:

a final field measurement (item no.: 50200100

(e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours worked) Use reverse side, if needed.

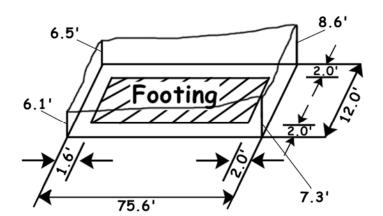

 $Vol = \left(\frac{8.6' + 7.3' + 6.1' + 6.5'}{4}\right) \times 75.6' \times 12.0' \times 1/27 = 239.4 \text{ CY}$

NOTE:

Max allowable pay width = 2.0 ft + ftg. Width + 2.0 ft. Max allowable pay length = 2.0 ft. + ftg. Length + 2.0 ft.

See FB #3, p. 23 for layout



Inspector's Daily Report

Section

County

				Route	-8
Date 8-15-16		Initial(s)	Date	District	10-10
	Inspected by:	RCW	8-15-16	Contract No.	
Contractor or Sub. <u>Stan's Sewer Co.</u>	Measured by:	RCW LM7	8-15-16	Job No.	
	Calculated by:	RCW	8-15-16		
Weather <u>Clear, 70's</u>	Checked by:	mF	8-23-16	Project	5

Item C	Code #	Fund Code (Opt.)	Item	Location	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book
20800	0150		Trench Backfill	MH #3 to MH#4	55.2 CY	Approved Srce. ♦ Shipment Ticket	
						(Mid-America S&G)	
55022	2000		\$\$ 2 RCP CL 3 24	MH# 3 to MH#4	66.6 FT	List and Mark (CMCM)	
1							
,							


This is: an estimated progress measurement (item no.:

 $\sqrt{}$


F - 46

a final field measurement (item no.: 20800150, 55022000

Remarks: (e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours worked) Use reverse side, if needed.

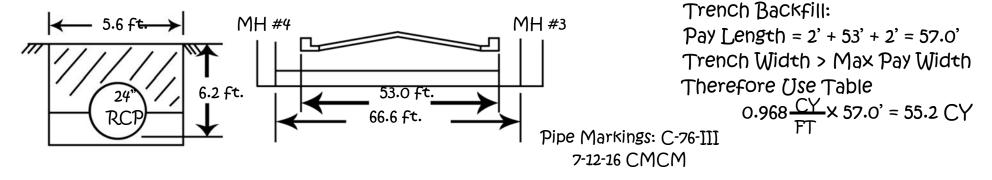

CALC BY: jws 11-8-16 CHECK BY: MLC 11/8/16



50300225 <u>CONCRETE STRUCTURES</u> 1. 8.5' × 2.25' × 18.33' × 1/27 (no deduction for steel H-pile) = 12.98 2. $\frac{12.0 + 16.0}{2}$ × 16.25' × 2.5' × $\frac{1}{27}$ = 21.06

3.
$$2\left(\frac{2.5+5.5}{2}\right) \times 8.00' \times 2.5' \times \frac{1}{27} = 5.93$$

5.
$$16.00' \times 0.11' \times 2.17' \times 1/27 = 0.14$$

Total Conc. Pier 2 46.2

Cu yd

50800105 REINFORCEMENT BARS

Bar	Şize	No.	Length Ea.	#5	#6	#9	#11			
h9	5	4	27' – 9"	111.0						
h10	5	4	23' – 0"	92.0						
h11	5	36	11' – 9"	423.0						
n	5	36	4' - 10"	174.0						
p1	11	10	27' – 9"				277.5'			
p2	5	8	9' – 3"	74.0						
S1	5	56	6' – 8"	373.3						
S2	5	36	8' – 8"	312.0						
\$3	5	18	9' – 8"	174.0						
t1	9	22	8 [°] – 3"			181.5'				
u1	6	6	10' - 3"		61.5'					
V7	5	36	20' – 6"	738.0						
ωı	5	8	18 [°] – 0"	144.0						
		Total Leng	th Each Size $$	2615.3'	61.5'	181.5'	277.5'			
		× lb	os./ft.	1.043	1.502	3.400	5.313			
		Total Ibs	. each size –	2727.8	92.4	617.1	1474.4			
	T_{0} tal lbs rehar nier #2 = 4912 lbs									

Total lbs. rebar pier #2 = 4912 lbs.

SUMMARY OF FIELD COMPUTATIONS

50300225	CONC STRUCT
50300255	CONC SUP-STR
50800105	REINFORCEMENT BARS
50800205	REINF BARS, EPOXY CTD.



Job No. Project No.

LOCATION	CALCULATED	D CHECKED	PLAN QTY	CALC. QT	Y. PAY
	BY	BY			QTY.
CONCRETE	SUPERSTRUCTU	IRES			
DECK	ICS	BDL	257.4 CY	259.8 CY	259.8 CY
	<i>8-23-1</i> 6	9-1-16	20/11 C1		
PARAPETS	ICS	PLAN	23.0	23.2	23.2
	<i>8-23-1</i> 6	CHECKS	25.0	25.2	25.2
		TOTAL	280.4 CY		283.0 CY

ADD 2-0-CY AUTH #2

2.6

CONCRETE STRUCTURES

CONCIDENT	001010p				
2 ABUTMENTS	BDL	PLAN CHECKS	77.8 CY	77.5 CY	77.5 CY
	<i>8-23-1</i> 6				
PIERS 1 & 3	BDL	PLAN CHECKS	136.4	136.4	136.4
	<i>8-23-1</i> 6		230.1	230.1	230.1
PIER 2	BDL	ICS	79.0	74.0	74.0
	8-24-1 6	<i>8-24-1</i> 6	//.0	71.0	71.0
		TOTAL	293.2 CY		287.9 CY

DEDUCT 5.3 CY AUTH. #2

REINFORCEMENT BARS, EPOXY COATED

DECK	BDL 8-24-16	jcs 8-24-16	52,910 LB	52,804	52,804 LB
PARAPETS	<i>jcs</i> 8-23-16	PLAN CHECKS	1,840	1,844	1,844
		TOTAL	54,750 LB		54,648 LB

DEDUCT 102 LBS AUTH. #2

REINFORCEMENT BARS

2 ABUTMENTS	JCS 8-30-16	PLAN CHECKS	5,760 LB	5,756 LB	5,756 LB
PIERS 2 & 3	BDL 9-1-16	PLAN CHECKS	8,690	8,691	8,691
PIER 2	BDL 8-30-16	PWR. 8/30/16	6,030	5,912	5,912
		TOTAL	20,480 LB		20,359 LB

DEDUCT 121 LBS AUTH. #2

Date 10/13/17				Dail	pector's y Report	County Section Route District Contract No. Job No.	2
Date <u>10/13</u>	5717	I	nspected by:		Date <i>10/13/1</i> 7	District Contract No.	
Contractor or Sub.	COLBE		leasured by:	MRL + MN	10/13/17	Job No.	
Weather PARTLY SUNNY, 62°			Calculated by: Checked by:	 	10/13/17 10/13/17	Project	
Item Code #	Fund Code (Opt.)	ltem		Location	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book
60600095		CL SI CONC (OUTLET,	NB STA	705+42	3.53 С.У. 🗸	DAILY PLANT REPORT & TICKET & TEST	DQ #61
This is: 📋 ar	n estimated	l progress measurement (it	em no.:		1)	1

a final field measurement (item no.: <u>60600095</u>

Remarks: (e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours worked) Use reverse side, if needed.

BUILT ACCORDING TO STANDARD 606006-03, "OUTLETS FOR CONCRETE CURB AND GUTTER TY B-6.24"

OUTLET LENGTH (MEASURED FROM END OF RADIUS) = 16.6' ✓

	SECTION A-A TO E-L		2.38 C.Y.(FROM STANDARD) 🗸		
Printed 10/13/2017	SECTION F-F	16.6' X 0.069 C.Y.PER FT	+ <u>I.15 C.Y</u> . ✓	BC 628 (Rev. 8/04)	
	TOTAL		<u>3.53 C.Y.</u>		

SURFAC	E VARIA	<u>ATIONS</u>		6/24/16					PG.	39	
				CLEAR, 8	3°						
ITEM XX	(X21600	SURF \	AR HMA	<u>C 2T</u>							
	WHEEL										
LANE	PATH	STATION									
EB	L	787+43									
		788+16	,								
		+22	,	_							
		+25							+++		
		793+37	,								
		798+75	;	NOTE: Per Article 40							
		814+43		one or two tons of surface mix shall be deducted from the contract each surface variation measured in the wheel paths. This informat would be shown in the explanation on the authorization:							
EB	R	788+16			explanatio		autrioriza	uon.			
		+22		Cost of 1 ton of Sur	face =			\$ 73.43			
		790+48		Cost of 2 tons 14 variations @ \$14	46.86 -	\$2,056.	04 total d	\$146.86			
		793+37			+0.00 –	φ2,000.	04 101ai u	eduction	1		
		798+72		On the authorization s							
		+75		positive quantity (14 E the authorization.	ach) which	will resul	t in a "ne	gative a	ddition	″ to	
		814+43									
		14 EACH	4								
TOTAL	-	11 2/101									
TOTAL											
TOTAL	-	Measured By: / Calculated By: /	ND 6/24/								

County 117



Page 16

Item 70100800

Fund 07E0A01 Plan Quantity 1.000

Unit Measure L SUM

TRAF CONT PROT 701401

Contract Unit Price 28000.00

Quantity Sheet

Section 59-1, 2(I-2); 68-1, 2(I-2)

Route FAI 55

District 06 Contract No. 72B21 Job No. C-96-023-12

Project

	Authorizations								
Number Date App'vd Add Deduct Total									

Cnty Const Sfty 117 I000 2A Quantity 1.000

	Station to Station	Q	uantities Place	d	Evidence of	Progress	
Date	Location or Description	This Date	To Date	Pay Est	Material Inspection	Document Source	
	From Progress Schedu			N/A			
	Est. Months of Use	= 9					
3/22/16	Initial Setup	0.25	0.25				
4/1/16	0.5 MO/9 MO. X 65%	0.04	0.29	#1			
4/22/16	1 MO/9MO × 65%	0.07	0.36	#2			
5/27/16		0.07	0.43	#3			
6/24/16	ده	0.07	0.50	#4			
7/22/16		0.07	0.57	#5			
8/26/16	"	0.07	0.64	#6			
9/23/16		0.07	0.71	#7	*Note: The To Work Items Co		
10/21/16	"	0.07	0.78	#8	Traffic Control Item Increa		
11/18/16	TRAF CONT. REMOVED	0.22	1.0	#9	By 10%. See Ca Page.	IIC. On Opposite	
			FINAL				
Source of for final q	documentation						

		FOR STD	701401	1					
					UNIT	PLAN	PLAN	FINAL	FINAL
DESCRIP	ΓΙΟΝ		UNIT		PRICE	QTY	COST	QTY	COST
CLA PAT	CH T2 12		SQ.YD.		\$185.00	155	\$28,675.00	169.6	\$31,376.00
CLA PAT	СН ТЗ 12		5Q.YD.		\$160.00	48	\$7,680.00	59.5	\$9,520.00
CLA PAT	CH T4 12		SQ.YD.		\$155.00	31	\$4,805.00	30.2	\$4,681.00
CLA PAT	CH T2 14		5Q .YD.		\$200.00	159	\$31,800.00	<i>193.1</i>	\$38,620.00
CLA PAT	СН ТЗ 14		5Q .YD.		\$190.00	16	\$3,040.00	0.0	, \$0.00
РАТСН R	EINF.		5Q .YD.		\$60.00	420	\$25,200.00	459.1	\$27,546.00
SAW CV	TS		FT.		\$1.00	3059	\$3,059.00	3241.4	\$3,241.40
SUBGRA	DE REPAI	R	DOLLAR		\$1.00	0	\$0.00	852.05	\$852.05
CLA PAT	CH T2 13		5Q . YD.		\$190.00	11	\$2,09000	10.6	\$2,014.00
TIE BARS			EACH		\$15.00	12	\$180.00	10.0	\$150.00
						TOTAL	\$106,529.00		<u>\$118,000.45</u>
(FINAL	COST – PL	AN COST)	0.45 - 100	6 <u>,529.00)</u>				
PL	AN COST	-	100	6,529.00					
			= 10.768	77	> 10%	THEREFORE	- ADJUSTMENT	NEEDED	
<i>P</i> =	28,000	(BID UNI)	T PRICE FO	OR STD. 7	01401)				
X =	<u>(118,000</u>	.45 - 106,	5 <u>29.00)</u>				Measured By: Calculated By:	MD 6/24/	16
		106,529					Checked By:	VMC 6/24/	
ADJ. UN	VIT PRICE	= 0.25P +	0.75P[1 +	(X - 0.1)]			1110 01 1 1	
		= 28,161.3	36						
АDЛ	/STMENT	= \$28,161.	36 - \$28,C	00 = \$161	.36	<u>ΡΑΥ ΧΧΧΟ</u>	<u> 03100 = \$161.36</u>		



Page 27 Item XXX03100

Traf Cont Price Adj

Contract Unit Price 161.36

Fund 07E0A01

Plan Quantity 0 Unit Measure L SUM **Quantity Sheet**

County 117

Section 59-1, 2(I-2); 68-1, 2(I-2)

Route FAI 55


District 06 Contract No. 72B21 Job No. C-96-023-12

Project

	Authorizations								
Number	Date App'vd	Add	Deduct	Total					
16	12/19/16	1.0		1.0					

Cnty Const Sfty 117 I000 2A Quantity 0.000

	Station to Station	Q	uantities Place	ed	Evidence of	Progress
Date	Location or Description	This Date	To Date	Pay Est	Material Inspection	Document Source
12/12/16	Price Adjustment	1.0	1.0		N/A	See calc file
	Of 70100800 Traf.		FINAL			
	Cont. & Protection					
	Std 701401					
Source of for final qu	documentation	eadsheet ir) CalC file			

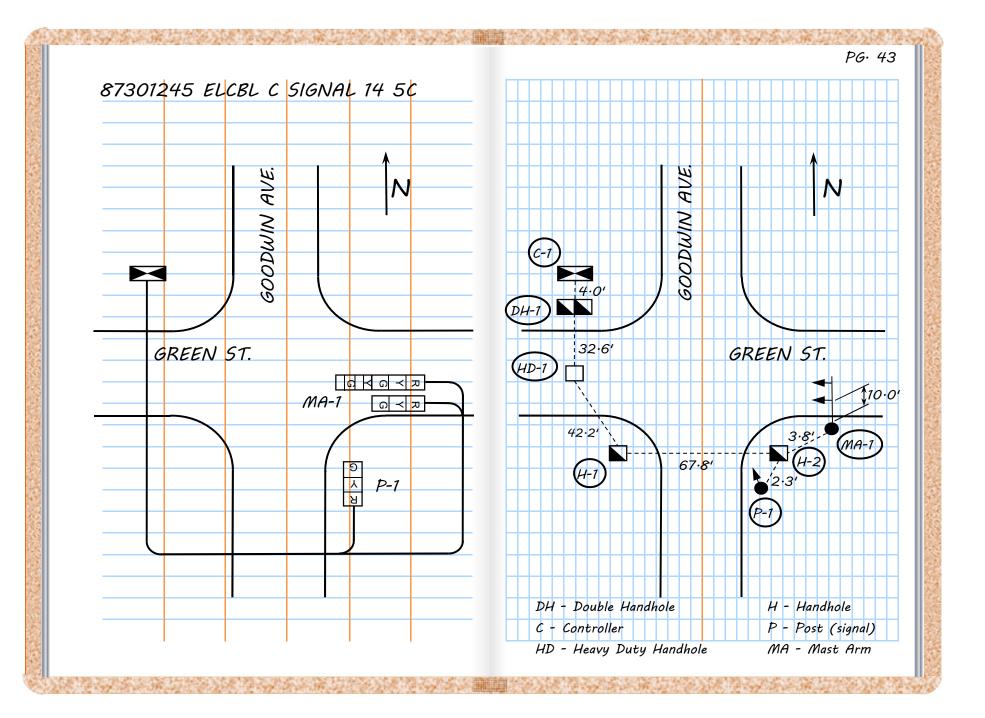

F-54

														Ш	
						RUN			+++					\square	++-
DATE	FROM	ТО	LENGTH	SLACK	VERTICAL	TOTAL		ΤΟΤΑ	L	NO	TES				+++
6/21	C-1	DH-1	4.0'	13.0'						4	SEE .	PAG	E 43	B FOR	2
	DH-1	HD-1	32.6'	6.5'									TIC A		
	HD-1	H-1	42.2'	6.5'						/	NEA:	SURE	EMEI	VTS	
	H-1	H-2	67.8'	6.5'											
"A-1"	SUBTOTA	2	146.6'	32.5'	3.0'										
	H-2	P-1	2.3'		3.0'										
	P-1	SIGNAL HEAD			13.0'	200.4	41								\square
"A-1"	C-1	H-2	146.6'	32.5'	3.0'									+++	++
	H-2	MA-1	3.8'		3.0'										
	MA-1	SIGNAL HEAD	10.0'		20.0'	218.9	9'	419	.3'					Щ	
														+++	++
]	Final Meas	urement:	<u>419.3'</u>												
								Measured	By: E	ALQO	CR	6/2	4/16	;	
								Calculated	By:	EAL		6/2	4/16	5	
								Checked E	sy:	CR		6/2	:4/16	Ш	
														Ш	\square

PIPE CULVERT	

PG. 83

					DATE	STAKED	MEASURED	PAY
ITEM	DESC	RIPTION		STA.	INST.	LENGTH	LENGTH	LENGTH
542A0235	P CVL	CL A 130	10)+50	7/11/16	31.0'	31.2 '	<i>31.0</i> ′
//		//	11-	+90	//	27.0'	28.3'	27.01
//		//	13	+24	7/12/16	50.01	49.3'	49.31
542A0241	P CVL	CLA 136	14	+18	//	24.0'	24.0'	24.0'
542A0247	P CVL	CLA142	15	+95	7/13/16	112.0' *	112.7'	112.0'
542A0235	P CVL	CLA 130	18	+02	//	21.0'	21.0'	21.0' V
SVBCON WEATHE		R: ROGER	S CONSTRI	Ιςτιοι	V	TOTAL PAS	Y LENGTHS: 542A0235	128.3′ √
	7/11/16	SUNN	IY, 79°				542A0241	24.0'
	7/12/16	SUNN	IY, 82°				542A0247	112.0′ 🗸
	7/13/16	PAR7	LY CLOUD	Y, 75°				
						STAVEDIEN	NGTH CHECKED В	Y: MD & VC 7/6/16
	ΤΛΛ ΔΛΛΕΙ	DIDE CO	,			SIAKEV LEN	VUIN CHECKEV D	1: IVIL 4 VC 770/10
ALL FDA							Measured E	By: MD&VC 7/13/16
ALL FRC	N/FD 1 157	d MARM)					TATAAA AA AA	
	VED LIST	& MARK)					Calculated	By: MD 7/13/16 w VMC 7/13/16

100 100

February 24, 2016

County Section Route Contract No.

Don Doe, Superintendent ACME Construction 1200 North Easy Street Anyplace, IL

Dear Mr. Doe:

As specified in Article 512.16 of the Standard Specifications for Road and Bridge Construction, you are hereby being provided this itemized list of authorized lengths of metal pile shells to furnish for the structure for the above route and section.

It has been determined from the test piles driven on February 18, 2016 that the following lengths should be furnished:

E Abut	23 pile @ 24'	=	552 lin. ft.
Pier 1	32 pile @ 30'	=	960 lin. ft.
W Abut	23 pile @ 36'	=	828 lin. ft.

Very Truly Yours,

John Smith

John Smith District Engineer

Note: Final documentation for FURNISHING PILES consists of a copy of the itemized list which was given to the Contractor and field measurements of the delivered piling.

DATE:	TUE	SDAY 6	/28/16		
WEATHE	R: MO	STLY SU	NNY, 60°	AM	
	PAI	RTLY CL	OUDY, 76	° PM	
CONTRA	CTOR: N	EWMARI	к(1 AM-	3:30 PM	
PAY ITEN	15:				
51200956	FURN I	METAL P	ILE SHE	LLS, 12"x	0.179 "
-51202305	DRIVIN	G PILES			
CREW:	1 FOREN	1AN, 4 C.	ARPENT	ERS,	
	2 OPER	A <i>TORS</i>			
EQUIPME	ENT: 1 C	RANE (L	INK BEL	T LS 138	H II)
	1 F	IAMMER	APE DI	9-42	
		4190LB F	RAM		
		E _{MAX} = 47	K · FT @	H = 11,2	5'
		Е _{міл} = 23	K · FT @	H = 5,5'	
			ACTING F		
NOMINA	L REQ'D	BEARIN	G:256 KII	PS	
NUMBER	REQ'D:	7 , INCLL	IDING TE	ST PILE	
FURNISH					
NOMINAL				TEROPT	,,,,,
RNDB	= <u>6.6 F_{eff}</u>	E In(10N	6		
	1000		red By: EA	4 ML 6	/28/16
		Measu		EA 6,	/28/16
		Calcu	lated By: ked By:		5/28/16

$\begin{array}{cccccccccccccccccccccccccccccccccccc$		- STAGE CONSTRUCTION LINE
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	6/28/16	ALGONQUIN RD.
2k(7 AM - 3:30 PM) <i>6 PILE SPACES @ 5'3" = 31'6"</i> <i>FINAL</i> <i>PILE SHELLS, 12"x 0.179"</i> <i>HEAT PILE FURN. DEL. CUT DRIVEN BLOW E</i> <i>NO. NO. LEN. LEN. OFF LEN. 7IN. K · FT</i> <i>615203 1 50.0' 50.02' 1.92' 48.10' 13.6 23.0</i> <i>615203 2 50.0' 51.12' 8.08' 43.04' 12.7 25.1</i> <i>615203 3 50.0' 50.03' 6.00' 44.03' 12.1 27.2</i> <i>615203 4 50.0' 50.03' 6.00' 44.03' 12.1 27.2</i> <i>615203 5 50.0' 50.04' 3.42' 46.62' 12.1 27.2</i> <i>615203 5 50.0' 50.04' 3.42' 46.62' 12.1 27.1</i> <i>7 TEST PILE 100.0' 13.42' 46.62' 12.1 27.1</i> <i>81647 6 50.0' 10.04' 3.42' 46.62' 12.1 27.1</i> <i>8170 300.0' 12.1 27.1 12.2 20.5 200.00' 10</i>	UNNY,60° AM	
PILE SHELLS, $12" \times 0.179"$ FINAL PILE SHELLS, $12" \times 0.179"$ HEAT PILE FURN. DEL. CUT DRIVEN BLOW E NO. NO. LEN. LEN. QFF LEN. //N. K + FT 615203 1 50.0' 50.0' 1.92' 48.10' 3.6 23.0 CARPENTERS, 615203 2 50.0' 51.12' 8.08' 43.04' 2.7 25.1 615203 2 50.0' 50.0' 4.92' 45.08' 1.7 29.3 CARPENTERS, 615203 3 50.0' 50.0' 4.92' 45.08' 1.7 29.3 CLINK BELT LS 138H II) 615203 5 50.0' 50.03' 6.00' 44.03' 2.7 25.1 RAM 615203 5 50.0' 50.04' 3.42' 46.62' 2.1 2.7 2.7 2.7 7 7 RAM 6 50.0' 50.04' 3.42' 46.62' 2.1 2.7 2.7 7 7 SCEE LETTER 6/13/16) PI	LOUDY, 76° PM	
PILE SHELLS, $12" \times 0.179"$ FINAL PILE SHELLS, $12" \times 0.179"$ HEAT PILE FURN. DEL. CUT DRIVEN BLOW E NO. NO. LEN. LEN. QFF LEN. //N. K + FT 615203 1 50.0' 50.0' 1.92' 48.10' 3.6 23.0 CARPENTERS, 615203 2 50.0' 51.12' 8.08' 43.04' 2.7 25.1 615203 2 50.0' 50.0' 4.92' 45.08' 1.7 29.3 CARPENTERS, 615203 3 50.0' 50.0' 4.92' 45.08' 1.7 29.3 CLINK BELT LS 138H II) 615203 5 50.0' 50.03' 6.00' 44.03' 2.7 25.1 RAM 615203 5 50.0' 50.04' 3.42' 46.62' 2.1 2.7 2.7 2.7 7 7 RAM 6 50.0' 50.04' 3.42' 46.62' 2.1 2.7 2.7 7 7 SCEE LETTER 6/13/16) PI	DV/7 AM 3.30 DM	
PILE SHELLS, $12"_{x}$ 0.179" HEAT PILE FURN. DEL. CUT DRIVEN BLOW E S NO. NO. LEN. LEN. OFF LEN. //// X FT S 1 50.0' 50.0' 50.0' 1.92' 48.10' 3.6 23.0 CARPENTERS, 15203 1 50.0' 50.0' 51.22' 8.08' 43.04' 2.7 25.1 CLINK BELT LS 138H III) 15203 2 50.0' 50.0' 50.03' 6.00' 44.03' 2.7 25.1 RAM 15203 5 50.0' 50.08' 5.33' 44.75' 2.7 25.1 RAM 15203 5 50.0' 50.08' 5.33' 44.75' 2.7 25.1 RAM 168847 6 50.0' 50.04' 3.42' 46.62' 2.7 2.7 2.7 Strong HAMMER Y 51200956 -300.00' -300.00' -7 -7 1.7 1.4 1.2 1.0* 8LOWS/N VIDING TEST PILE </td <td>KK/T AMT- 5:50 PMJ</td> <td>6 PILE SPACES @ 3-3 = 31-6</td>	KK/T AMT- 5:50 PMJ	6 PILE SPACES @ 3-3 = 31-6
$S = \frac{NO. NO. LEN. LEN. OFF LEN. /IN. K \cdot FT}{615203 1 50.0' 50.02' 1.92' 48.10' } 3.6 23.0$ $CARPENTERS, = \frac{NO. 15203 2}{50.0' 50.00' 4.92' 45.08' } 2.7 25.1$ $S = \frac{15203 3}{50.0' 50.00' 50.00' 4.92' 45.08' } 2.7 27.2$ $S = \frac{15203 4}{50.0' 50.00' 50.00' 4.92' 45.08' } 2.7 27.2$ $S = \frac{15203 5}{50.0' 50.00' 50.00' 50.00' 4.92' 45.08' } 2.7 27.2$ $S = \frac{1720}{12} = \frac{1125'}{7 12} = \frac{1125'}$	PILE SHELLS 12" NO 179 "	
$ \begin{array}{c} 615203 & 1 & 50.0' & 50.02' & 1.92' & 48.10' & 3.6 & 23.0 \\ 615203 & 2 & 50.0' & 57.12' & 8.08' & 43.04' & 2.7 & 25.1 \\ 615203 & 3 & 50.0' & 50.00' & 4.92' & 45.08' & 1.7 & 29.3 \\ 615203 & 3 & 50.0' & 50.00' & 4.92' & 45.08' & 1.7 & 29.3 \\ 615203 & 4 & 50.0' & 50.03' & 6.00' & 44.03' & 2.7 & 27.2 \\ RAM & & & & & & & & & & & & & & & & & & &$		NO. NO. LEN. LEN. OFF LEN. /IN. K.FT
CARPENTERS, (LINK BELT LS 138 H II) (LINK BELT LS 138 H II) (R APE D19-42 RAM $47 K \cdot FT @ H = 11.25'$ $3 K \cdot FT @ H = 5.5'$ ACTING HAMMER NG; 256 KIPS (SEE LETTER 6/13/16) (NUMG; EXP ML 6/28/16 MU		
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	CARPENTERS,	
R APE D19-42 615203 5 $50.0'$ $50.0'$ $50.3'$ $44.75'$ 2.7 25.1 RAM 615203 5 $50.0'$ $50.04'$ $3.42'$ $46.62'$ 2.1 27.1 AT $K \cdot FT @$ $H = 5.5'$ $300.0'$ $2771.62''$ 2.7		
RAM 168847 6 $50,0'$ $50,04'$ $3,42'$ $46,62'$ 2.1 27.1 AT K · FT @ H = 11,25' 7 TEST PILE $300,0'$ $271,62''$ 2.1 27.1 AS K · FT @ H = 5,5' $300,0'$ $271,62''$ 2.1 27.1 ACTING HAMMER $NG: 256$ $KIPS$ $PAY: 51200956$ $300,00'$ $271,62''$ $300,00'$ <	(LINK BELT LS 138H II)	615203 4 50.0' 50.03' 6.00' 44.03' J 2.1 27.2
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	R APE D19-42	615203 5 50.0' 50.08' 5.33' 44.75' 2.7 25.1
$\begin{array}{c} 3 \ K \cdot FT @ \ H = 5.5' \\ \hline ACTING \ HAMMER \\ VG: 256 \ KIPS \\ \hline VG: 256 \ KIPS \\ \hline VG: 256 \ KIPS \\ \hline VDING \ TEST \ PILE \\ \hline VDING \ TEST \ PILE \\ \hline VING: \\ N_{W} \\ \hline VING: \\ N_{W} \\ \hline VING: \\ N_{W} \\ \hline VING: \\ \hline VING: \\ \hline VING: \\ \hline N_{W} \\ \hline VING: \\ \hline VING$	RAM	168847 6 50.0' 50.04' 3.42' 46.62' 2.1 27.1
$ACTING HAMMER$ $NG: 256 \ KIPS$ $PAY: 51200956$ $JUDING \ TEST \ PILE$ $VG: SEE \ LETTER 6/13/16$ $PILE \ BEARING \ ACCEPTANCE \ TABLE$ $H \ 5.5 \ 6.0 \ 6.5 \ 7.0 \ 7.5 \ 8.0 \ 8.5 \ FT.$ $E \ 23.0^{**} \ 25.1 \ 27.2 \ 29.3 \ 31.4 \ 33.5 \ 35.6 \ K \cdot FT$ $W_4 \ 3.6 \ 27 \ 21 \ 1.7 \ 1.4 \ 1.2 \ 1.0^{*} \ BLOWS/IN$ Sured By: EA 4 ML 6/28/16		
$PAY: 51200956 \longrightarrow 300.00' \sqrt{51202305} \longrightarrow 271.62' \times 271.62' \longrightarrow 271.62' \times 271.62' \longrightarrow 271.62' \longrightarrow 271.62' \longrightarrow 271.62' \longrightarrow $	² 3 K · FT @ H = 5.5'	<u>300.0</u> V <u>271.62</u> V
$51202305 = 271.62'$ $CUDING TEST PILE$ $(SEE LETTER 6/13/16)$ $PILE BEARING ACCEPTANCE TABLE$ $H 5.5 6.0 6.5 7.0 7.5 8.0 8.5 FT.$ $E 23.0^{**} 25.1 27.2 29.3 31.4 33.5 35.6 K \cdot FT$ $K_{0} 36 27 21 17 14 12 10^{*} BLOWS/IW$ $FA - 6/28/16$ $(Sured By: EA + ML 6/28/16)$ $FA - 6/28/16$ $(Sured By: EA + ML 6/28/16)$ $FA - 6/28/16$ $(Sured By: EA + ML 6/28/16)$ $FA - 6/28/16$		
$UDING TEST PILE$ $(SEE LETTER 6/13/16)$ $VING:$ N_{IJ}	VG:256 KIPS	
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	UDING TECT PULE	51202305 271.62'
$\begin{array}{c} H & 5.5 & 6.0 & 6.5 & 7.0 & 7.5 & 8.0 & 8.5 & FT. \\ \hline H & 5.5 & 6.0 & 6.5 & 7.0 & 7.5 & 8.0 & 8.5 & FT. \\ \hline E & 23.0^{**} & 25.1 & 27.2 & 29.3 & 31.4 & 33.5 & 35.6 & K \cdot FT \\ \hline N_4 & 3.6 & 2.7 & 2.1 & 1.7 & 1.4 & 1.2 & 1.0^{*} & BLOWS/W \\ \hline Sured By: EA & ML & 6/28/16 \\ \hline FA & 6/28/16 \\ \hline \end{array}$		PILE REARING ACCEPTANCE TARLE
$\frac{E}{23,0^{**}} \frac{25,1}{27} \frac{27,2}{27} \frac{29,3}{37,4} \frac{33,5}{35,6} \frac{35,6}{K} \cdot FT$ $\frac{E}{3,0^{**}} \frac{25,1}{27} \frac{27,2}{27} \frac{29,3}{17} \frac{37,4}{12} \frac{33,5}{10^{*}} \frac{35,6}{BLOWS} \frac{K \cdot FT}{W}$ Sured By: $EA \neq ML \frac{6}{28}/16$ $= \frac{6}{28}/16$ $= \frac{100}{100}		
$\frac{W_{4}}{36} = \frac{36}{27} = \frac{27}{27} = \frac{17}{17} = \frac{14}{12} = \frac{10^{*}}{10^{*}} = \frac{BLOWS}{W}$		
sured By: EA \neq ML 6/28/16 = 4 - 6/28/16 * Controlled by IDOT Spec		AI 36 27 27 17 1A 12 1A BLOWS/IAU
ulated By: EA 6/28/16 cked By: MSL 6/28/16 recked By: MSL 6/28/16 ** Controlled by IDOT Spec. ** Controlled by hammer limits. PG. 23	wred By: EA & ML 6/28/16	
cked By: MSL 6/28/16 ** Controlled by hammer limits. PG. 23	wated By EA 6/28/16	
	had By: MSL 6/28/16	** Controlled by hammer limits.
	ckeu by.	PQ.23

F-58

S. Carro



Test Pile Driving Record

	ier No. East	•	. ,	Calculated				FAP 343		
Pile Type &	Size Meta	l Shell 12"	' dia w/.179" wal	ls Checked	by	WMK	Section	70D-Y-B-R	& 70HB-R-1	
Nominal Re	quired Beari	ng 372	kips Estimat	ed Plan Leng	gth	69 ft.	County	COOK		
Pile Cutoff E	Elevation 8	73.77 ft.	Authorized Fu	rnished Leng	gth	78 ft.	Contract	62897		
Ground Surf	face Elev. At	Pile Whi	le Driving 840).23 ft.* Clos	est	t Boring(s)	3-1 & sb-5	Driven Bea	aring Verification	on Gates
lammer Ma	ke & Model	Delmag [D30-32	Ham	me	er Cushion N	Aterial & T	nickness	Conbest, 2" thi	ck
		_	-lbs. Min.	Operating E	ne	rgy 25,383 f	tIbs.	Pile Helm	et Weight 425	i0 lbs.
Tip	Distance	Blows	Hammer	Nominal		Tip	Distance	Blows	Hammer	Nominal
Elevation	Below	Per	Energy	Driven		Elevation	Below	Per	Energy	Driven
(Feet)	Cut Off	(Inch)	Developed	Bearing		(Feet)	Cut Off	(Inch)	Developed	Bearing
840.23	31.54					811.23	61.54	1.1	36400	248
839.23	32.54					810.23	62.54	1.1	34125	237
838.23	33.54					809.23	63.54	1.0	31850	212
837.23	34.54					808.23	64.54	0.9	36400	219
836.23	35.54					807.23	65.54	1.1	36400	248
835.23	36.54					806.23	66.54	1.2	40650	282
834.23	37.54	<0.5	<25383			805.23	67.54	1.1	38675	258
833.23	38.54	<0.5	<25383			804.23	68.54	1.3	40950	294
832.23	39.54	<0.5	<25383			803.23	69.54	1.3	40950	294
831.23	40.54	<0.5	<25383			802.23	70.54	1.3	47775	326
830.23	41.54	<0.5	<25383			801.23	71.54	1.5	45500	339
829.23	42.54	<0.5	<25383			800.23	72.54	2.5	45500	422
828.23	43.54	<0.5	<25383			799.23	73.54	2.2	47775	413
827.23	44.54	<0.5	<25383			798.23	75.54	2.5	43225	409
826.23	45.54	0.5	27300	102		797.23	76.54	2.5	43225	409
825.23	46.54	0.5	27300	102		796.23	77.54	2.5	45500	422
824.23	47.54	0.5	31850	118						
823.23	48.54	0.7	27300	144						
822.23	49.54	0.7	27300	144						
821.23	50.54	0.7	27300	144						
820.23	51.54	0.6	27300	125						
819.23	52.54	0.6	31850	143				1		
818.23	53.54	0.8	29575	172				1		
817.23	55.54	1	29575	201				1		
816.23	56.54	1	27300	189				1		
815.23	57.54	0.5	31850	118				1		
814.23	58.54	0.5	31850	118				1		
813.23	59.54	0.5	34125	126				1		
812.23	60.54	0.8	34125	192						

*reflects being driven from bottom of plan specified precored hole elevation

min. test pile driven bearing = 372kips X 1.10 = 409 kips


First consistant Bearing around 73 ft ---- order ~ 78ft. since boring st-5 shows stiffer soil at deeper elevation.



Production Pile Driving Data

	ture Num ment/Pier			Stage 1)		riving St Calculate			te Completed <u>10/22/2016</u> Sheet <u>1</u> of <u>1</u> ute FAP 343
Pile 7	Гуре & Siz	ze Me	tal Shell [·]	12" dia w/	.179" walls	Checke	ed by 🛛 WN	IK Sec	tion 70D-Y-B-R & 70HB-R-1
Nomi	inal Requi	red Bea	ring 3	72 kips	Estimated	- I Plan Le	ength 69	ft. Cou	unty COOK
Pile (Cutoff Elev	/ation	873.77 ft	. Autho	rized Furn	ished Le	ength 78	ft. Cor	ntract 62897
Hamr	mer Make	& Mode	l Delma	ig D30-32	2	H	ammer Cush	nion Mater	sb-5 Driven Bearing Verification Gates ial & Thickness Conbest , 2" thick Bits Halmset Wainkt + 4050 lbs
Max.	Operating	l Energy	55,898	πIbs.		perating	Energy 25	,383 ftIbs.	Pile Helmet Weight 4250 lbs.
As d	riven pile la	ayout ske	tch with p	oiles num	bered, north	arrow in	cluded, and a	ny significa	nt deviations from plan locations noted
					N	₹			8" from plan location
		$\setminus 2$		(4)	(6T)	(8)	(10)	(12)	
		\backslash			\sim		<u> </u>	(11B)	
			(3B)	(5B) (78	り	(9B)		(13B) (15B) (17B)
	ate (B) at ba								
	Delivered			Paid	Paid	Blows	Hammer	Nominal	
No.	Length (Feet)	Splice	Cutoff Length		Furnished Length	Per (Inch)	Energy Developed	Driven Bearing	Driving Observations & Comments
1	81.8	0	3	78.8	78.8	2	43225	373	82 ft piles delivered as two 41 ft. sections
2	81.8	0	10.5	71.3	78	2.5	38675	381	
3B	82	0	5	77	78	3	34125	378	
4	82	0	4	78	78	2	43225	373	Bend in Pile 4 occurred 10' prior to bearing,
5B	82	0	5	80	80	2.4	38675	375	cut out bend and re-splied pile per BBS
6T						2.5	45500	422	Test pile driven on 6/22/07
7B	82.1	0	6	76.1	78	3.1	36400	398	
8	82.1	0	6	76.1	78	3.5	36400	416	
9B	82.2	0	5	77.2	78	4	36400	435	
10	78	0	1	76.6	78	2.5	38675	381	78 ft. long piles were composed of 20+38+20
11B	78.1	0	1.5	76.1	78	2	43225	373	
12	78.1	0	2	76.1	78	2.4	38675	375	
13B	78.1	10.5**	6	82.6	78	3	34125	378	
14	78.2	5**	1.5	81.7	78	2.5	38675	381	Pile hit something at 12' below precore and
15B	78	10	5.8	82.2	88	3.5	34125	399	moved out of 6" tolerence (ok per BBS)
16	78.1	10	5.8	82.2	88	3	36400	393	
17B	78.1	10	5.9	82.1	88	3.1	34125	382	
18	78.1	10	5.2	82.9	88	3.4	31850	378	
									*elevation reflects +/- 30ft. precore specified
									**Not paid as furnished since obtained from Cut
			Structures				I		off sections from piles 2 and 3B

cc: Bureau of Bridges and Structures

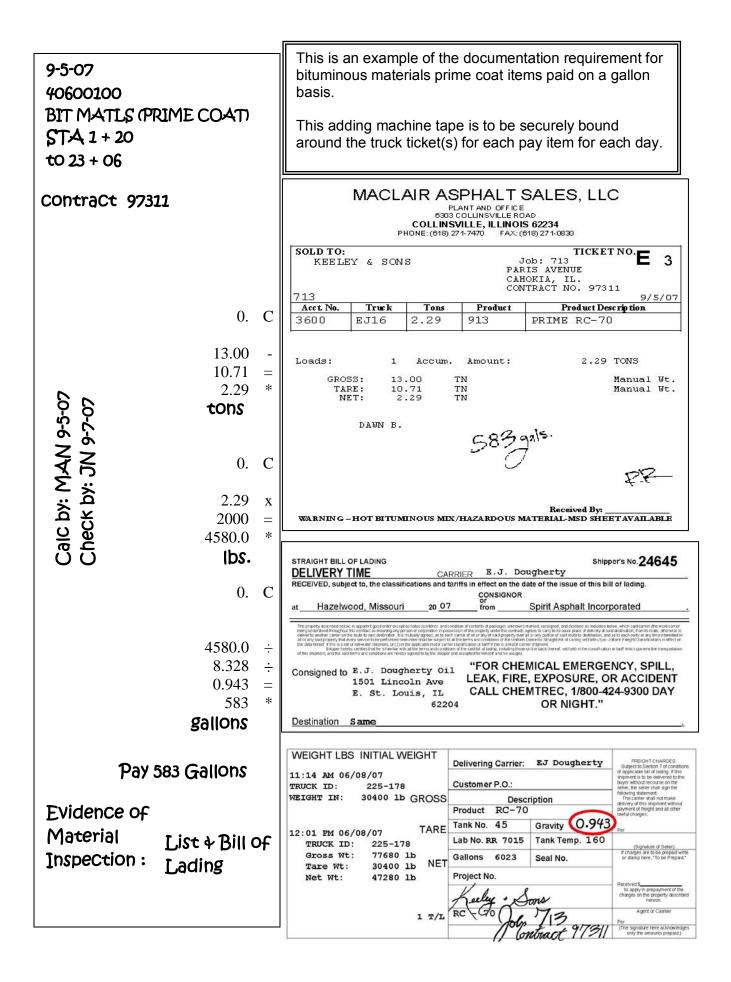



Contractor ACME CONSTRUCTION CO.

Report No. 🥖

Weekly Trainee Report

County:

Section:

Week Ending 06-24-16

					(10) Hours to Date	253	247						
	500				(9) Hours H this Week	38	36		IEES,	_			
	R				-ĭ+≥				Final documentation for the pay item, TRAINEES,	"Trainees" employed in accordance with the	your		
	2	2				4	 4		item, ⁻ weeklv	ince wi	ided ir		
			,		ked	8	8		e pay	cordar	s inclu		
					tys Wor	10	 8		for the	l in ac	vision		
Route:	District:	Contract:	Job No.:	Project:	(8) Hours and Days Worked	0	0		itation form	ployed	al Pro	_	
Ro	Dis	ပိ	Jol	Pro	Hours	0	0		cumen of this	s" emp	Training Special Provisions included in your contract.		
						∞	 8	 NOTE:	nal doc	rainee	Training contract.		
						∞	8	 ž	л. Г	<u>Ş</u> Ę			
					(7) Status	∢	T						
					(6) W ork Classification	см	CA						
					(5) TPG								
					(4) IDOT MRB								
					(3) FHWA		\boxtimes						
					(2) Ethnic Group	Ŧ	βΔ						
					(1) Trainee Name and Individual Identification Number	JUANITA SANCHEZ, 6155	ERNESTJACKSON, 7521						

visual job site inspection

Rich M. Hixou State's Representative

those trainees working on the above designated project. Cohn Smith Contractor's Representative



F - 63

Inspector's Daily Report

Section

County


				Route	-8
Date <u>9-26-16</u>		Initial(s)	Date	District	10-18
	Inspected by:	ALG	9-26-16	Contract No.	
Contractor or Sub. Wortman-Starwalt Inc.	Measured by: Calculated by:	ALG	9-26-16	Job No.	A
Weather <u>CLEAR 80 ^O</u>	Checked by:	XPR	9-26-16	Project	5 '

Item Code #	Fund Code (Opt.)	Item	Location	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book
50500405		F4E STRUCT. STEEL	N. Tri-Level MID Bridge	3140 lbs	FabriCation Inspector's	\checkmark
					Release (BBS 59) ↓ Cert	
This is: an	estimated	progress measurement (item	no.:	•)	

A final field measurement (item no.: <u>50500405</u>)
 Remarks: (e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours worked) Use reverse side, if needed.

Angles weighed on approved scale at Effingham Equity. Scale No. IL 4201 (9-1-16). See wt. ticket in str. steel file.

Note: Bill of Lading from fabricator indicates wt of steel = 3200 lb actual wt = 3140 lb





F - 64

Inspector's Daily Report

Section

County

Date <u>9-23-16</u> Contractor or Sub. Weather <u>SUNN</u>		<u>STATE</u> Mea Calo	bected by: asured by: culated by: cked by:	Initial(s) <u>BAB</u> <u>BAB. KWN</u> <u>BAB</u> <i>S</i> M	Date 9-23-16 9-23-16 9-23-16 9-23-16	Route District Contract No. Job No. Project	NP
Item Code #	Fund Code (Opt.)	Item	Lo	ocation	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book
25000400		NITROGEN FERT NUTR	ENTIRE J	OB (7.0 acres)	700 LBS	SEE GUARANTEED ANALYSIS FROM BAG	\checkmark
						IN SEEDING FILE	

2000400	NITROGEN FERT NUTR	ENTIRE JOB (7.0 acres)	100 PD2	see guaranteed analtsis rout dag	N
				IN SEEDING FILE	
25000500	PHOSPHORUS FERT NUTR.	دد	420 LBS	6	\checkmark
25000600	POTASSIUM FERT NUTR	٤٢	280 LBS	66	\checkmark
This is: an	estimated progress measurement (item	no.:)	

a final field measurement (item no.: <u>25000400, 25000500, 25000600</u>

Remarks: (e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours worked) Use reverse side, if needed.

Plans Require: N=100 lb/acre Phos = 60 lb/acre

 $Pot = 40 \ lb/aCre$

 $(7.0 \text{ aCre } \times 100 \text{ [b/aCre } = 700 \text{ [bs, yield is good]})$

 $(7.0 \text{ aCre } \times 60 \text{ }\text{b/aCre} = 420 \text{ }\text{bs}, \text{ yield is good})$

 $(7.0 \text{ aCre} \times 40 \text{ |b/aCre} = 280 \text{ |bs, yield is good)}$

Contractor delivered & used 140 bags of 10-6-4 @ 50 lb ea.

Quantity: Nit = 140 bags \times 50 lbs \times 10% = 700 lbs

 $Phos = 140 \text{ bags} \times 50 \text{ lbs} \times 6\% = 420 \text{ lbs}$

 $Pot = 140 \text{ bags} \times 50 \text{ lbs} \times 4\% = 280 \text{ lbs}$

Fertilizer bags were counted & destroyed by Resident.

	44200108	44200112										
<u>Patch #</u>	<u>TYPE 2</u>	<u>TYPE 3</u>	CALCULA	ATIONS			SB LANE		N	B LANE	Ξ	
						Depth						
(8)		16.7	(12.7' + 1	2.3') V 1	2.0 × 1/9	A=10"			Α			
1241+02			2	~ ~ 1	2.0 ~ 117	-71-20		12.7		8)	12.3'
					=16.7 S.Y.			1				
								-				
(9)	6.7		5 0 V 12	0 V 1/0 -	6.7 S.Y.	Depth		5.0'		(9)		5.0'
1241+98			J.U X 12.	0 × 119 -	0.7 3.7.	A = 10"					A	
1271-90												
											+++	
						<u>Depth</u>		4		A		54
(10)		29.4	10 // V 11	0 V 1/0	= 24.5 S.Y.	A = 14"		18.4'		(10		18.4
\sim		27.1				B = 13.8"			В		C	
1246+00			Patch De	pth Incr	ease	<u>C = 14.2"</u>	•••••••	_	в			
			= (1+	<u>10") = 40</u> ,	%	Avg.=14"	++++++	_	•	12.0'	~ ~	
							++++++			12.0	+++	+++++
			Incre				++++++			++++	+++	+++++
DACE			🔹 Pay	= 24.5 X		Evidence o	of Mat'l Insp	Plan	t Rel	oort, Tid	ckets	& Test
PAGE				= 29.4 5	.У					++++	+++	
TOTALS	6.7 S.Y.	46 . 1 5.Y.				Meas. By:	VC, MD 10/	14/16	;	++++	$\downarrow \downarrow \downarrow$	
						Calc. By:		'14/1				

F-65

1.1. 1.2.2.4



Inspector's Daily Report

Section

County

	iransp	ortation		Daliy	Report		Section		
Date <u>7-27-16</u> Contractor or Sub. Weather <u>Clear</u> ,		E. Construction	Inspected by: Measured by: Calculated by: Checked by:	Initial(s) <u>RG, MF</u> <u>RG, MF</u> <u>RG</u> JR	Date 7-27-16 7-27-16 7-27-16 7-27-16		Route District Contract No. Job No. Project	JOE STA	MP
Item Code #	Fund Code (Opt.)	Item	L	ocation	Quantity and Units	Evi	idence of Material Ins (Optional)		Posted in Q Book
35400400		PCC BASE CSE W	9 LT 0+2	25 to 23+50		Plant Re	eport & Ticket	ts & Test	
			RT 0+2	25 tO 10+20	1106.7 SY				
		base cou	09.01 states th urse, etc. shall on shown on t ngineer.	be the exact	horizontal	· · · · · · · · · · · · · · · · · · ·			
This is: □ an	estimated	progress measuremen	t (item no :		I)	
√ a f Remarks: (e.g	inal field n ., instructi	neasurement (item no.: on to Contractor, specia reverse side, if needed.	35400400	es with dimensior	ns for final measu	rements, com	putations, number of)) persons working	g, hours

See Field Book #3 Pg. 12-14 for field width and depth Checks

F-66

LT 0+25 to 23+50 2325' \times 3' \times 1/9 = 775.0 SY RT 0+25 to 10+20 995' \times 3' \times 1/9 = 331.7 SY

 $Total = 1106.7 \, SY$

BC 628 (Rev. 8/04)



Inspector's **Daily Report**

Section

County

						Route	-8	
Date <u>July 7, 20</u>	16			Initial(s)	Date	District	10-11	2
			Inspected by:	BAB	7-7-16	Contract No.		
Contractor or Sub. <u>ACME Const. Co.</u>			Measured by:	BAB & AG	7-7-16	Job No.		
			Calculated by:	BAB	7-7-16			
Weather <u>Cloud</u>	у, 83 0		Checked by:	SYJ	7-7-16	Project	5	
Item Code #	Fund Code	Item	L	ocation	Quantity and Units	Evidence of Material Ins	nootion	sted ı Q

Item Code #	Code (Opt.)	Item	Location	and Units	Evidence of Material Inspection	in Q Book
51100100		Slope wall 4"	South Abut	74.6 SY	Plant Rpt. & Tickets & Test	\checkmark
This is: 🗌 a	n estimate	d progress measurement (ite	m no.:			


 $\sqrt{}$

a final field measurement (item no.: _51100100 (e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours worked) Use reverse side, if needed.

All measurements on upper slope surface of wall

$$\left(\frac{19.6+19.8}{2}\right)$$
 (34.1) $\stackrel{\bullet}{\bullet}$ 9 $\frac{\text{sf}}{\text{sy}}$ = 74.6 sy

See FB #4, p.12 for depth Checks



Remarks:

Rev Illin	iois De Transp	partment ortation		pector's y Report	County Section	
Date <u>10-5-16</u> Contractor or Sub Weather <u>SUNN</u>		N <u>SIDE UP</u> Me Ca	Initial(s) spected by: JAJ easured by: JAJ lculated by: JAJ ecked by: <u>£</u> F	Date <u>10-5-16</u> <u>10-5-16</u> <u>10-5-16</u> <u>10-6-16</u>	Route District Contract No. Job No. Project	s MP
Item Code #	Fund Code (Opt.)	Item	Location	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book
25200200	W36U	Supplemental	STA 461+00 TO	24.5 Units	Potable Source- Danville	\checkmark
		Watering	493+00 RT		Municipal water supply	
This is: 🔲 a	n estimated	l progress measurement (iter	n no.:)	
Remarks: (e.g. wo	g., instructio rked) Use r 252.08	everse side, if needed. 3, One initial W	olems, sketches with dimension atering of 5 gal	/sy and 15	irements, computations, number of persons workin additional waterings at 3 ay at 3 gal/sy over 8167 sy	
Truck Pla	ate $ ightarrow$	3,500 Gallons/	Load; 7 Loads	Utilized ~	Today	

3500 gal/load x 7 loads = 24,500 Gal ÷ 1000 Gal/Unit = 24.5 Units

F-68



 \boxtimes

F-69

Inspector's **Daily Report**

Section

County

Date <u>5-12-16</u> Contractor or Sub. <u>GREENSIDE UP</u> Weather Sunny, 91 ⁰		NSIDE UP N	Initial(s) nspected by: <u>GJ</u> Measured by: <u>GJ</u> Calculated by: <u>GJ</u>	Date <u>5-12-16</u> <u>5-12-16</u> <u>5-12-16</u>		AMP	
Weather Sunny	, 91 0		Checked by: EG	5-15-16	Project 5		
Item Code #	Fund Code (Opt.)	ltem	Location	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book	
25301800	W36U	Seedlings	STA 26+50 LT to	23.5 (Jnits	Letter Of Certification And	DQ#	

	Code (Opt.)	nem	Eocation	and Units	(Optional)	in Q Book
25301800	W36U	Seedlings	STA 26+50 LT to	23.5 Units	Letter Of Certification And	DQ#
			26+59 LT		RE Vis (From Rhimes	150
					Nursery)	
		1		1	•	- I

This is: an estimated progress measurement (item no.:

> a final field measurement (item no.: 25301800

(e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours worked) Use reverse side, if needed. Remarks:

Seedlings Tied In Bunches Of 30 Plants Counted 87 Bunches

<u>30 PLANTS/BUNCH × 87 BUNCHES</u> 100 PLANTS/UNIT Final QTY= = 26.1 (Jnits)


Pay 90% for planting on this date: $26.1 \times 0.90 = 23.5$ (Jnits

NOTE: Per Article 253.17 the remaining 10% of the pay quantity will be paid after the period of establishment (253.14) or upon execution and receipt of a third party performance bond.

		-	TREE RE	MOVAL		
_		CIRCUM	20100110	20100210	DATE	
LOC	CATION	MEAS.	6 - <u>1</u> 5	> 15	REMOVEL	>
_						
	613+65	53″		16.9	8-18-16	
	614+10	21	6.7		"	
	614+28	28	8.9		"	
	614+80	38	12.1		"	
	616+25	58		18.5	"	
	616+38	30	9.5		"	
	616+73	48		15.3	"	
	617+28	74		23.6	8-19-16	
	617+29	23	7.3		"	
	622+91	40	12.7		"	
	623+52	68	21.6	21.6	"	
	624+21	24	7.6		"	
			64.8	95.9		
			UNIT	UNIT		
			DIA.	DIA.		
-	a	direct rea	ust note " ading tree the tree c	tape is u		

		PG. 3
SUB-CONTRACT	TOR: R 🕏 W TREE	SERVICE
<u>DATE 6-15</u>	<u>>15 INSP. BY</u>	WEATHER
8/18/16 37.2 8/19/16 27.6	50.7 EAL 45.2 EAL	SUNNY, 76° SUNNY, 80°
0/19/10 27.0	93-2 CAL	30ININY, 80
STA 613+65: 53	3" ÷ 3.1416 = 16.9 unit	diameter
	Measured By: MRL	8/16/16
	Calculated By: MRL	<i>8/19/16</i>
	Checked By: VMC	8/19/16
+++++++++++		++++++++++++++++++++++++++++++++++++
+++++++++++++++++++++++++++++++++++++++		+++++++++++++++++++++++++++++++++++++++

Contract # 60V20 X4060110 BIT· MATERIALS (PRIME COAT) IL 173 FROM COUNTY LINE TO FLAT IRON RD· 31,200.00 + 21,420.00 -9,780.00 * 51,880.00 +



Ticket Tape Calculations for Emulsions with Added Water

RON RD.	31,200.00 +	Weight before application - from prime coat ticket Weight after application - from prime coat weigh-back ticket
	21,420.00 -	
/10	9,780.00 *	Net weight of emulsion used on job (includes <u>all</u> added water)
10/0/10	51,880.00 +	Tanker weight of emulsion - shown on the bill of lading
` 1	22,234.00 +	Weight of water added to emulsion – shown on bill of lading
))	74,114.00 *	Total weight of the diluted emulsion mixture
	51,880.00 ÷	Tanker weight of emulsion shown on bill of lading
	74,114.00 =	Total weight of the diluted emulsion mixture
z z		
ha pay	0.70 *	
	9,780.00 x	Weight of emulsion used on job (includes all added water)
	-	
	0.70 =	Pounds of emulsion
	6,846.00 *	
	6,846.00 x	Pounds of emulsion
	-	% of residual asphalt in the emulsion from the bill of lading
TATA	0.638 =	Pounds of residual asphalt – this is what you pay!
TOTAL =	,	
	LBS·	

Initial(s)

Measured .


EAL

N N

Checked

Calcul

Contract # 60V20 X4060110 BIT· MATERIALS (PRIME COAT) IL 173 FROM COUNTY LINE TO FLAT IRON RD·

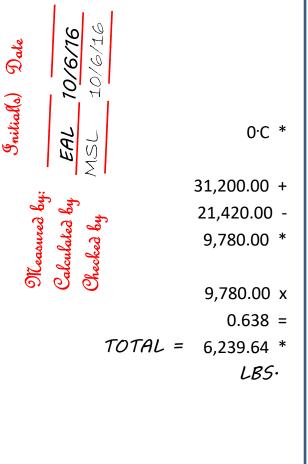



Ticket Tape Calculations for Emulsions with NO Added Water and for Cutbacks

......Weight before application - From prime coat ticketWeight after application - From prime coat weigh-back ticketNet weight – Total pounds of cutback or emulsion used on job

......Pounds of cutback or emulsion% of residual asphalt from the bill of ladingPounds of residual asphalt – this is what you pay!



Inspector's Daily Report

Section

County

Route

Date _9/21/2017		Initial(s)	Date	District
	Inspected by:	GJR	9/21/2017	Contract No. 70X01
Contractor or Sub. ACME Construction	Measured by:	GJR	9/21/2017	Job No.
	Calculated by:	MLK	9/21/2017	
Weather 80's P Cloudy	Checked by:	JMN	9/22/2017	Project

Item Code #	Fund Code (Opt.)	Item	Location	Quantity and Units	Evidence of Material Inspection (Optional)	Posted in Q Book
44003100		MEDIAN REMOVAL	Sta 59+00 Rt	229.0 SF	N/A	

This is: an estimated progress measurement (item no.:

a final field measurement (item no.: 44003100

Remarks: (e.g., instruction to Contractor, special problems, sketches with dimensions for final measurements, computations, number of persons working, hours worked) Use reverse side, if needed.

Used Cogo Area Calculation Tool from Trimble Access Version 2016.03. Area calculated from a list of coordinate points shot around the perimeter.

See attached print out of area calculation (Attachment A1).

See attached print out of point list: medianrem100 to medianrem105 (Attachment A2). Point selection indicated by a checkmark.


See attached print out of coordinates: medianrem100 to medianrem105 (Attachment A3).

Measured quantity compares to plan quantity of 228.5 SF as shown on Sheet 42 of the plans.

 \square

Field Measurements with Electronic Devices

Attachment A1 – (See Median Removal IDR on Page F-73)

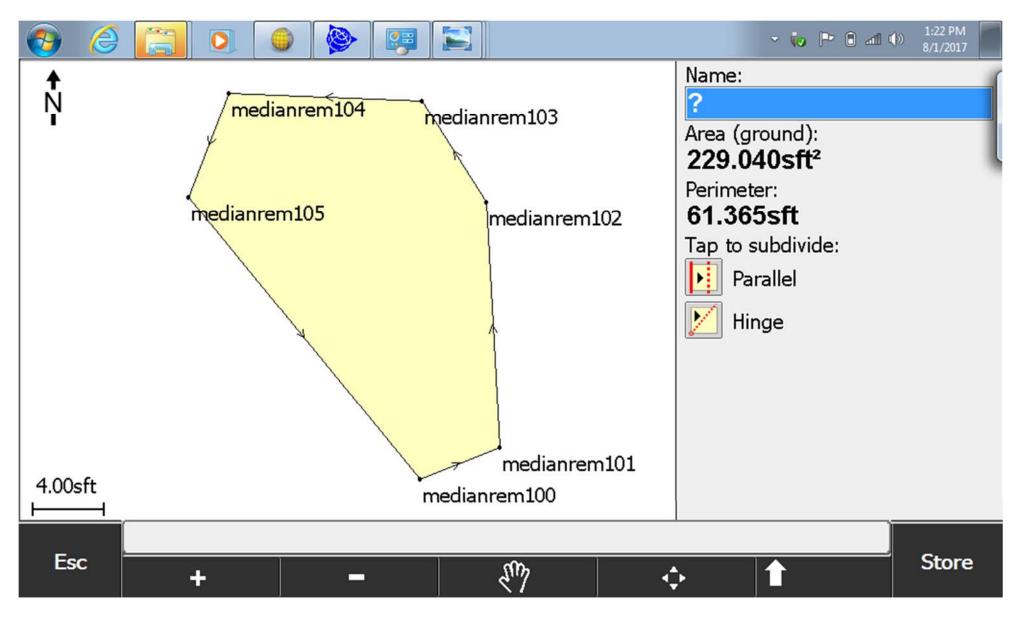

Field Measurements with Electronic Devices

Attachment A2 – (See Median Removal IDR on Page F-73)

📀 🏉 🚞 💽 🌘		• 🖻 🕯 📲	1:08 PM 8/1/2017
Name	Code		 62% 74%
✓ × medianrem100			14
🖌 × medianrem101		•	<u> </u>
✓ × medianrem102			Ψ
✓ × medianrem103			-
✓ × medianrem104			T ?
✓ × medianrem105			
× curbrem100			
× curbrem101			
× curbrem102			
× curbrem103			Map
× curbrem104			M <u>e</u> nu
× curbrem105		= -	F <u>a</u> vorites
•	ш	•	Switch to
	No survey PDOP:1.5		a i
Esc All No	ne Filter		Calc

Field Measurements with Electronic Devices

Attachment A3 – (See Median Removal IDR on Page F-73)

📀 🏉 🔚 💽 🌘		() In 8 • • •	1:24 PM 8/1/2017
Name	Northing	Easting	(
🗄 × medianrem100	393500.131	757629.986	
🗄 × medianrem101	393501.823	757634.310	
🗄 × medianrem102	393515.298	757633.609	
⊞ [×] medianrem103	393520.862	757630.052	
	393521.236	757619.481	
🗄 × medianrem105	393515.577	757617.305	
⊞ [×] curbrem100	393498.455	757608.632	
⊞ [×] curbrem101	393477.323	757620.981	
⊞ [×] curbrem102	393454.928	757626.144	
⊞ [×] curbrem103	393429.306	757628.203	
⊞ [×] curbrem104	393397.888	757629.830	
⊞ [×] curbrem105	393364.404	757631.296	
•			+ -
Esc Display	V Edit	Options	Details