
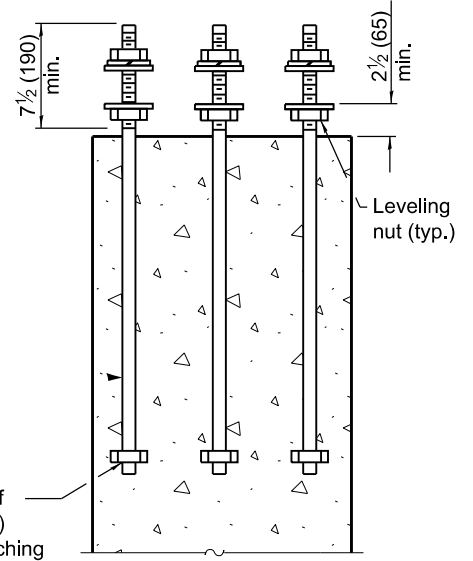


When required provide second luminaire, arm and brackets at 90° or as noted on the plans. Second luminaire and arm not shown for clarity.

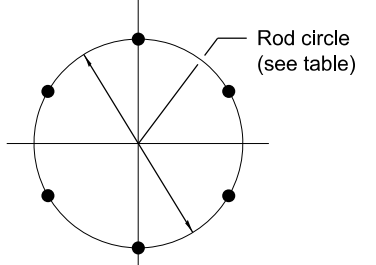

ANCHOR ROD DETAIL

GENERAL NOTES

Signal heads, sign panels, and other attachments are shown for minimum design loading purposes only. Each signal head shall weigh 80 lb (36 kg) and have a projected area of 14.7 sq. ft. (1.37 sq. m).
 See Standard 720016 for location of sign panel or blankout sign closest to pole.
 See standard 821101 for luminaire wiring diagram.
 All dimensions are in inches (millimeters) unless otherwise shown.

MAST ARM LENGTH	ANCHOR ROD CIRCLE	ANCHOR ROD SIZE
16' thru 35' (4.87 m thru 10.67 m)	18 (450)	1 3/4 x 7' (44 x 2.10 m)
36' thru 55' (10.97 m thru 16.80 m)	21 (535)	1 3/4 x 7' (44 x 2.10 m)

DATE	REVISIONS
1-1-19	Remove tenon top info. Rev.
	luminaire arm info. Rev. second
	luminaire info.
1-1-18	Revised for LRFD reqs. Revised
	GEN. NOTES for sign location.
	Revised ANCHOR ROD DETAIL.

STEEL COMB. MAST ARM ASSEMBLY AND POLE 16' THROUGH 55'

STANDARD 877011-10

Illinois Department of Transportation

APPROVED January 1, 2019
Amy Ellis
 ENGINEER OF OPERATIONS

APPROVED January 1, 2019
S. E. ...
 ENGINEER OF DESIGN AND ENVIRONMENT

ISSUED 1-1-02