



### TYPICAL FABRIC FORMED CONCRETE REVETMENT MAT LINED DITCH

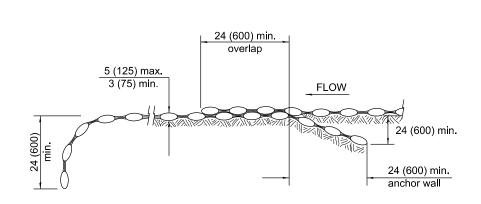

### **CUT OFF WALL DETAILS**

## **TYPICAL LAP JOINTS W/ANCHOR WALL**

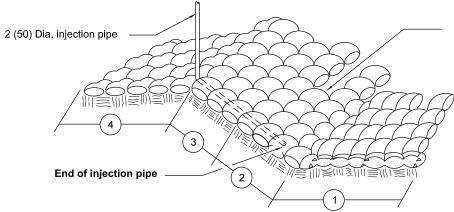

#### **INSTALLATION DETAILS**

- In placing inserts through fabric use care to avoid breaking drop stitches.
- 2. 1 Indicates sequence of pour.

Seams between mill widths of fabric shall be generally perpendicular to waterway.

#### **GENERAL NOTES**

Dimensions given with minimum limits shall be adjusted for field conditions as directed by the Engineer.

All anchor walls on side slopes and at lap joints, as well as cut off walls, shall be installed in trenches.

Cut off walls shall be installed at the upstream and downstream ends.

All dimensions are in inches (millimeters) unless otherwise shown.

Illinois Department of Transportation	
APPROVED January 1, 2008	SI
Sart Est X	SUED
ENGINEER OF POLICY AND PROCEDURES	D 1
APPROVED January 1, 2008	1 9
Eri E Han	97
ENGINEER OF DESIGN AND ENVIRONMENT	

DATE	REVISIONS	
1-1-08	Switched units to English (metric).	
1-1-02	Revised second note.	-

# FABRIC FORMED CONCRETE REVETMENT MATS

**STANDARD 285001-02**