



Technical drawing of a concrete slab layout showing reinforcement details. The drawing includes the following specifications:

- Reinforcement Bars:**
 - A:** Top longitudinal bars, indicated by arrows pointing right.
 - B:** Bottom longitudinal bars, indicated by arrows pointing down.
 - C:** Top longitudinal bars in the right section, indicated by arrows pointing right.
 - D:** Bottom longitudinal bars in the right section, indicated by arrows pointing down.
- Dimensions:**
 - Top left section: 36 (900) min. (width of top reinforcement).
 - Top right section: 36 (900) min. (width of top reinforcement).
 - Right section: 4'-0" (1.2 m) min. (width of bottom reinforcement).
 - Right section: 4'-0" (1.2 m) to 6'-0" (1.8 m) (height of bottom reinforcement).
- Angles:**
 - Angles not less than 60° (indicated at the top and bottom of the slab).
- Other Features:**
 - Existing longitudinal joint (indicated by a vertical line).
 - Centerline (indicated by a horizontal line with 'C' markers).



CLASS D

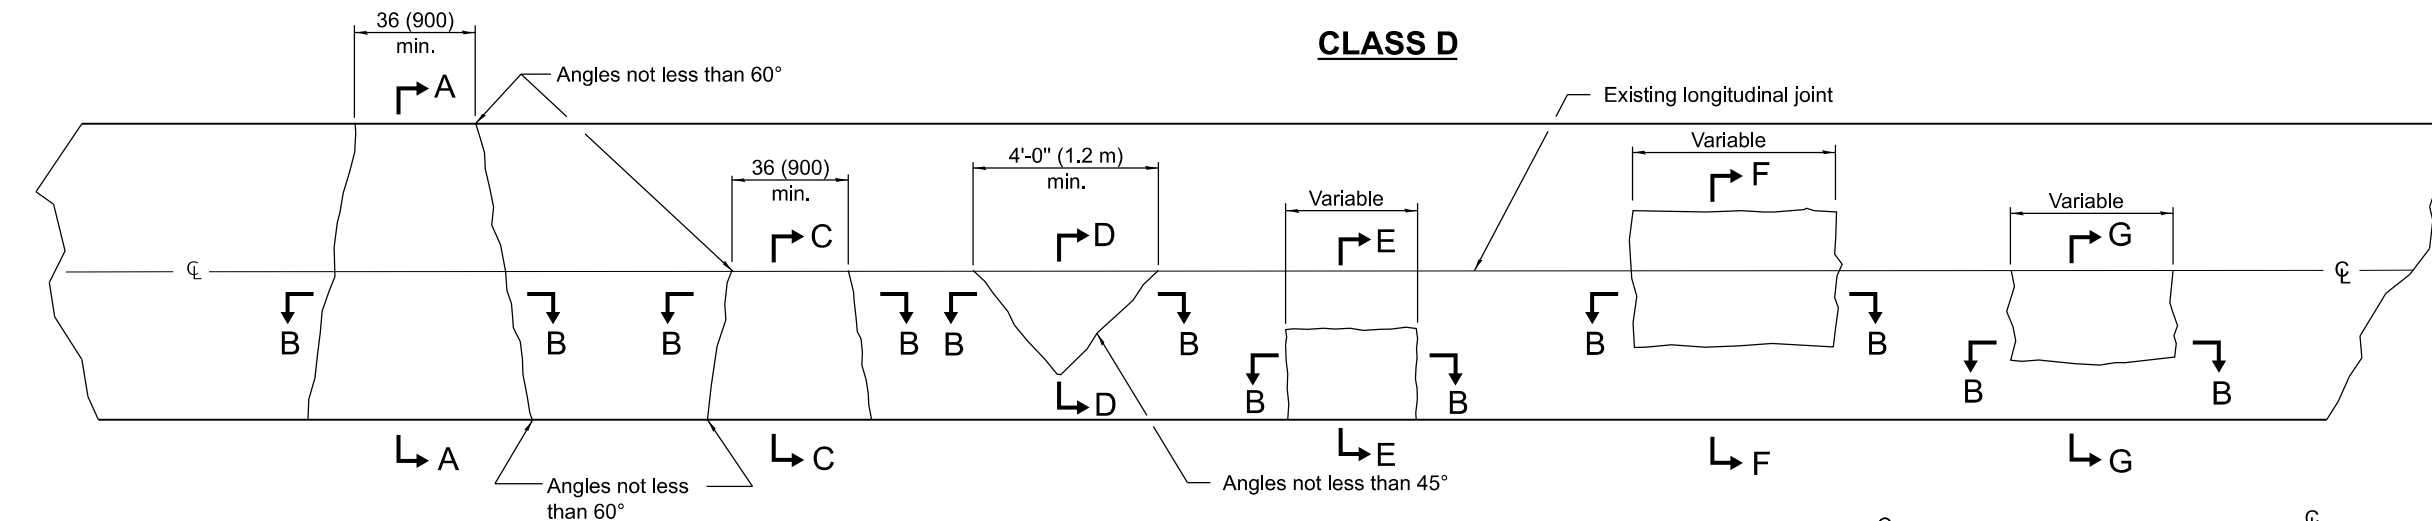

SECTION B-B



SECTION F-F

SECTION G-G

CLASS C and D PATCHES

STANDARD 442201-03