




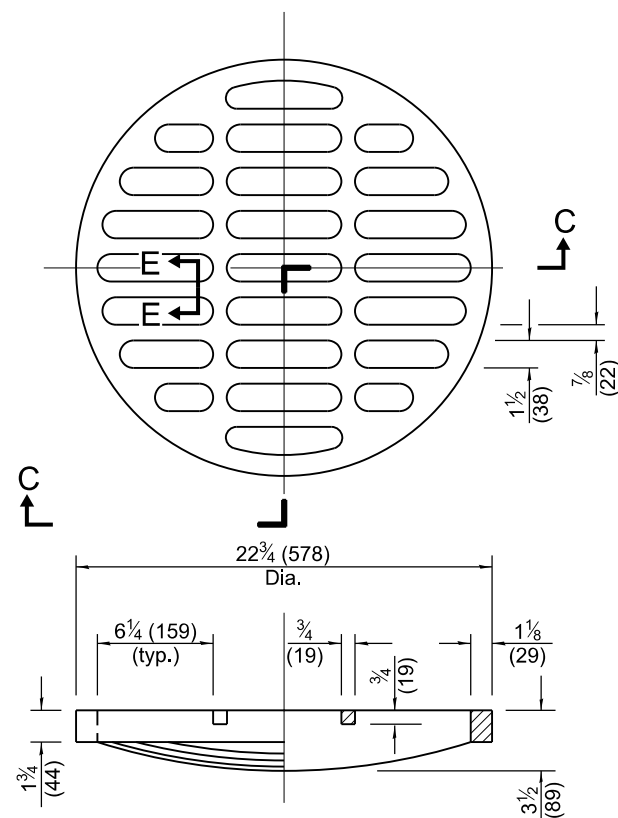


SECTION C-C
CAST OPEN LID




SECTION E-E




SECTION G-G

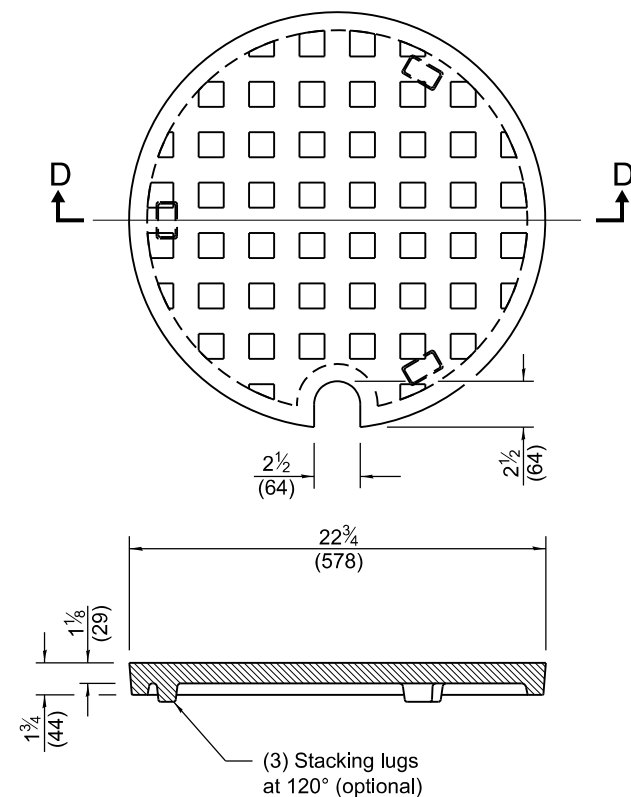


SECTION D-D
CAST CLOSED LID
Gray Iron

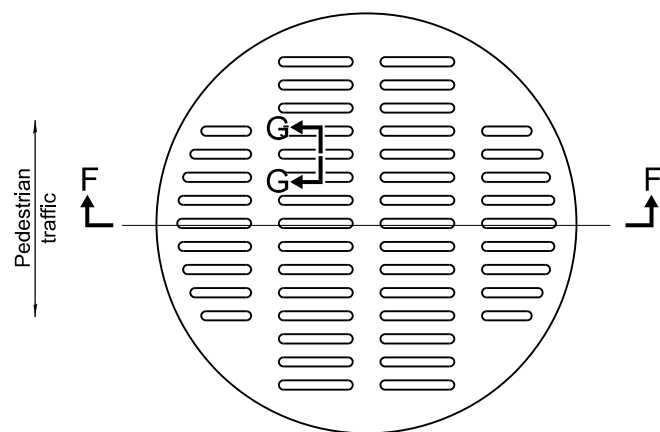


SECTION F-F
ADA COMPLIANT CAST OPEN LID

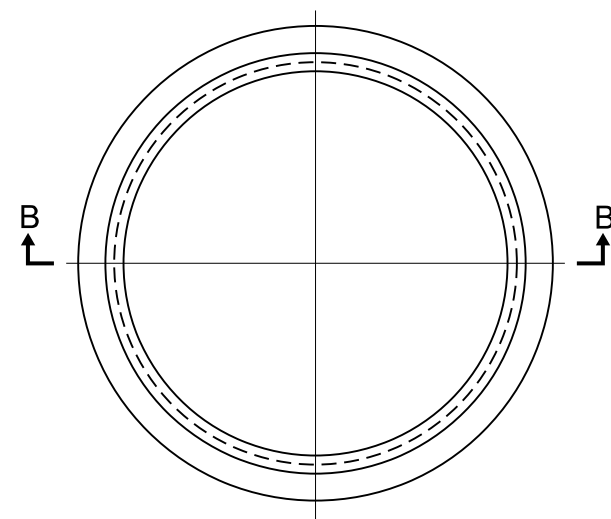

SECTION B-B
CAST FRAME
Gray Iron

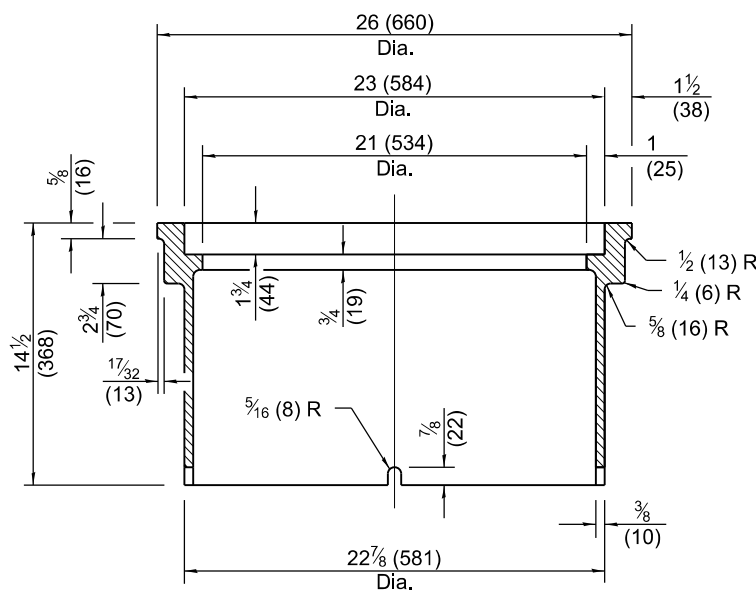

SECTION A-A
CAST BASE
Gray Iron

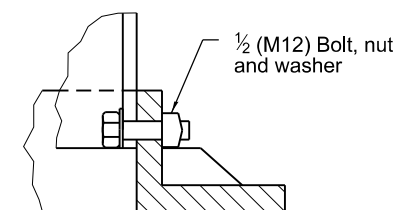

DETAIL OF BOLTING FRAME TO BASE

NOTE: Bolts shall be removed after pavement has been placed.

GENERAL NOTES

The four holes in the cast base may be rotated 45° from the position shown in section A-A.

All dimensions are in inches (millimeters) unless otherwise shown.

DATE	REVISIONS
1-1-20	Revised dimension location in Section A-A.
1-1-15	Added ADA compliant open lid.

BASE, FRAME AND LIDS TYPE 5

STANDARD 604021-04