

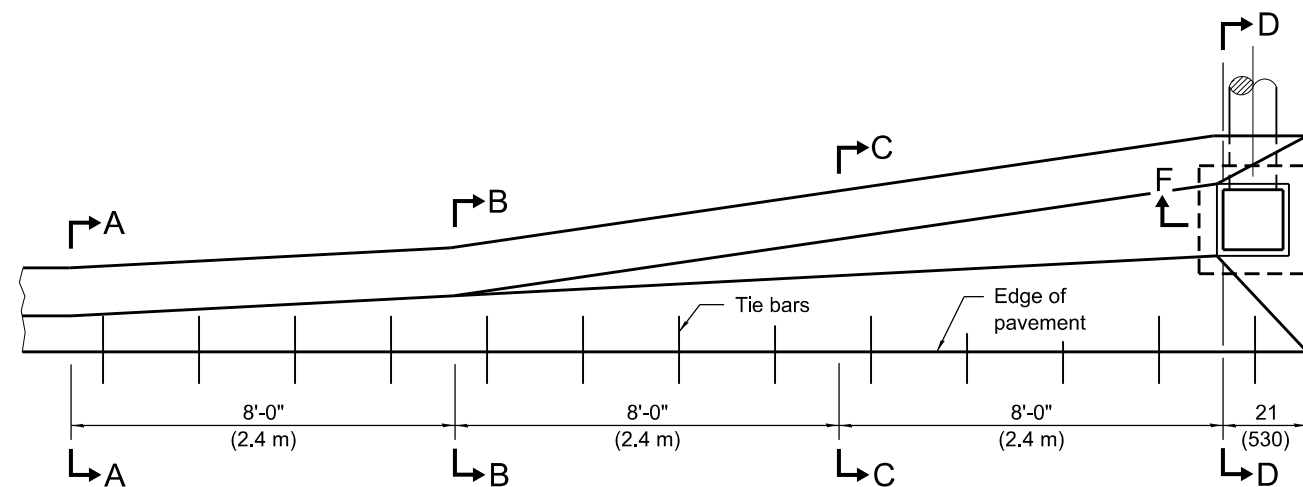
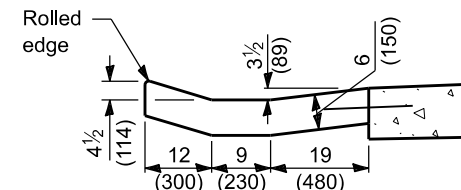
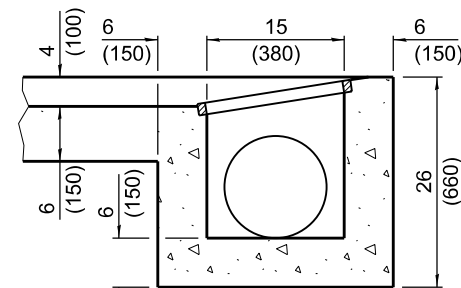



PLAN - DOUBLE OUTLET

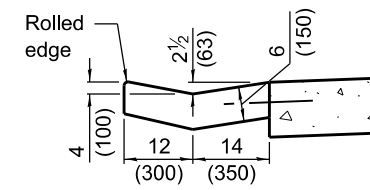


PLAN - SINGLE OUTLET

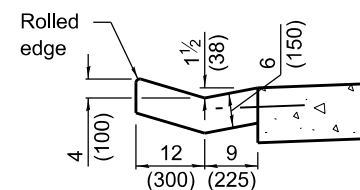

SECTION C-C

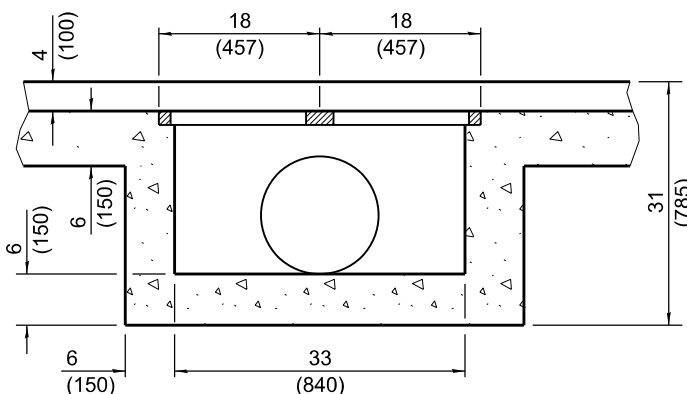


SECTION E-E

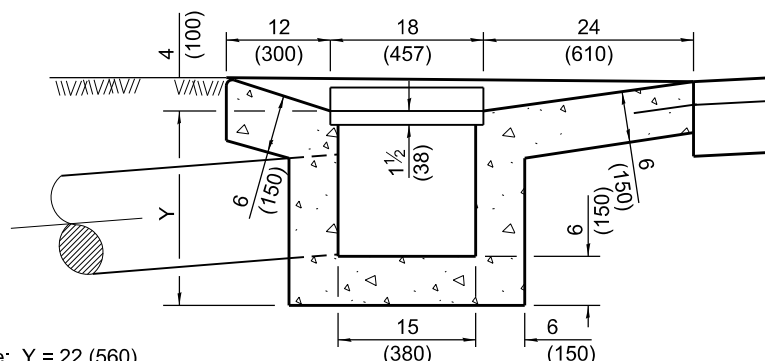

SECTION D-D

Single: Y = 22 (560)
Double: Y = 27 (685)

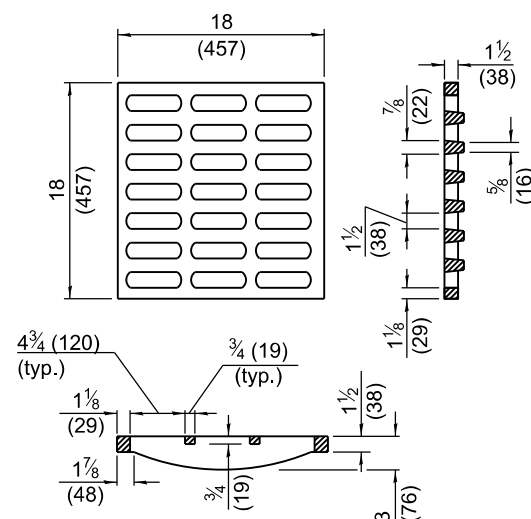

GRATE TYPE B

QUANTITIES

Material	Single	Double
Concrete - cu. yd. (m³)	1.7 (1.3)	3.1 (2.4)
Cast Iron Grate - Ea.	1	2
Pipe Drain - Dia. in (mm)	12 (300)	15 (375)

GENERAL NOTES

The gutter outlet shall be tied to the pavement in accordance with details for longitudinal construction joint shown on Standard 420001.

If the average grade of the pavement for the distance A-D exceeds 2%, this distance shall be increased 6'-0" (1.8 m) for each 1% increase in grade.

All dimensions are in inches (millimeters) unless otherwise shown.

DATE	REVISIONS
1-1-18	Deleted second General Note to avoid conflict with first General Note.
1-1-09	Switched units to English (metric).

OUTLET TYPE 1 FOR TYPE B GUTTER

STANDARD 606206-04