




PLAN (Facing highway)

to rail attachment)










 $\frac{1}{2}$ (M12) bolt with std. nut and $1\frac{1}{4}$ x $\frac{1}{8}$ (32x3) plate washers

 $\frac{9}{16}$ (15) dia. holes in timbers.

under nut and bolt head.

2½ (63)

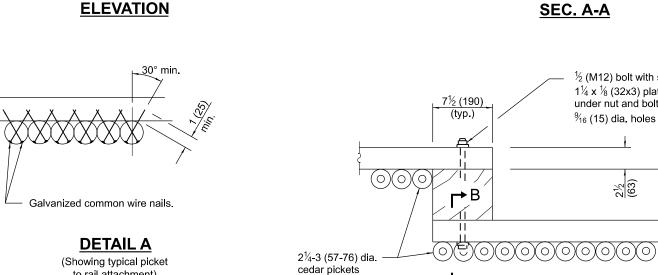



A←

Illinois Department of Transportation

DETAIL B (Showing typical panel to post connection at each rail.)

ЬB

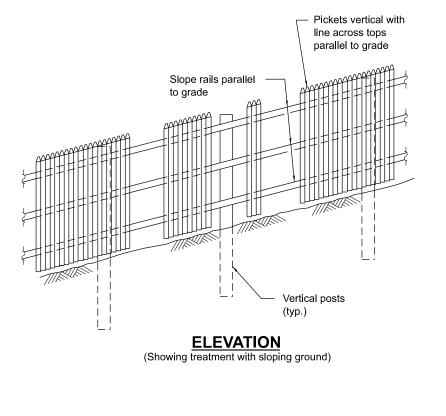



SECTION B-B

(Notch pickets when required to clear washer and bolt head.)

GENERAL NOTES

Loading is based on 80 mph (130 km/h) with 30% gust factor. Minimum allowable soil pressure = 1.25 tsf (120 kPa).

All dimensions are in inches (millimeters) unless otherwise shown.

DATE	REVISIONS
1-1-09	Switched units to English (metric).
	Changed Sec. B-B to Detail B.
1-1-97	Renum. Standard 2367-3.
	Deleted DN Symbol.

SIGHT SCREEN **CEDAR STOCKADE FENCE TYPE S**

STANDARD 641001-01