



Reduce to 40' (12.2 m) o.c. on curves with posted or advisory speeds of 45 mph (70 km/h) or less.

## TWO-LANE / TWO-WAY

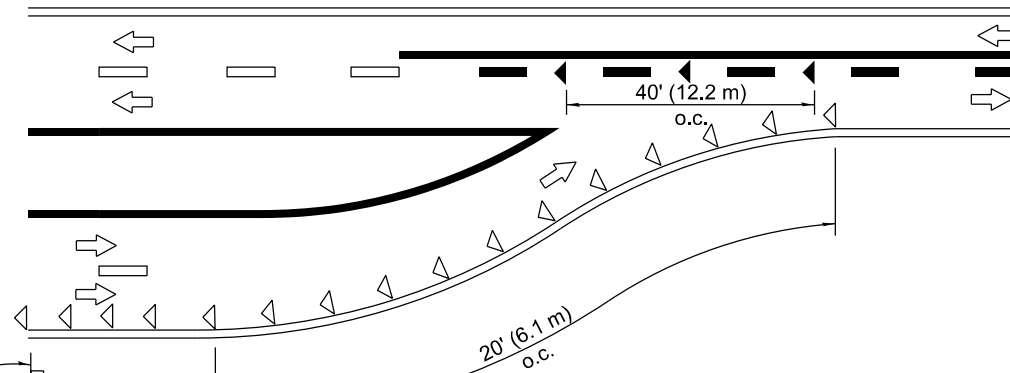


## LANE REDUCTION TRANSITION

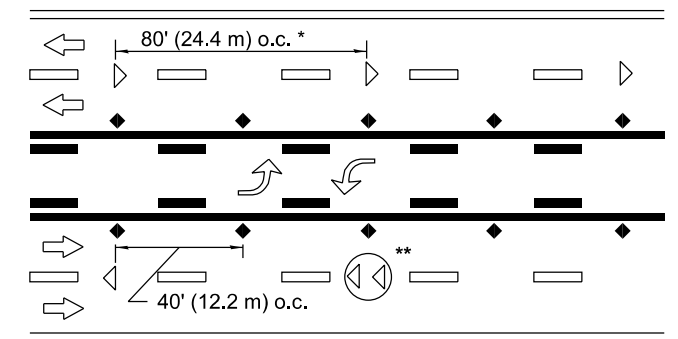


\*, \*\* See MULTI LANE DIVIDED detail for lane marker notes.

## TWO-WAY LEFT TURN

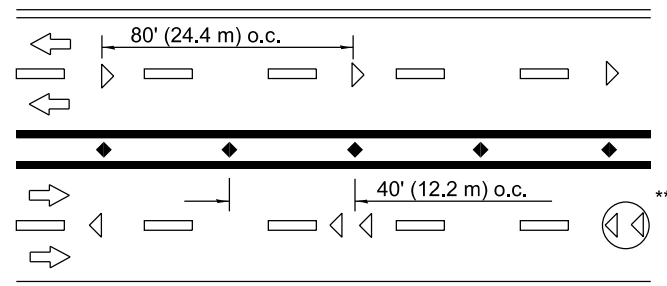

\*, \*\* See MULTI LANE DIVIDED detail for lane marker notes.


## MULTI-LANE UNDIVIDED

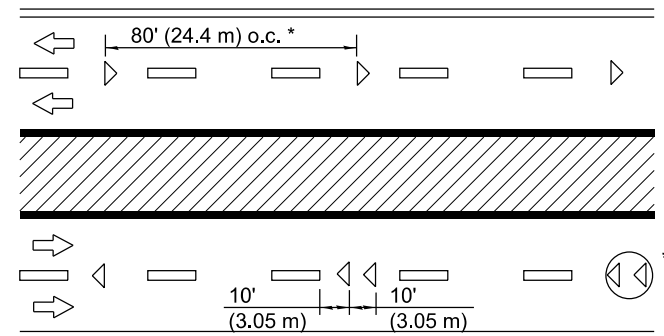



\* Reduce to 40' (12.2 m) o.c. on curves where advisory speeds are 10 mph (15 km/h) lower than posted speeds.

\*\* Where double lane line markers are specified, they shall be spaced as shown.


## MULTI-LANE DIVIDED

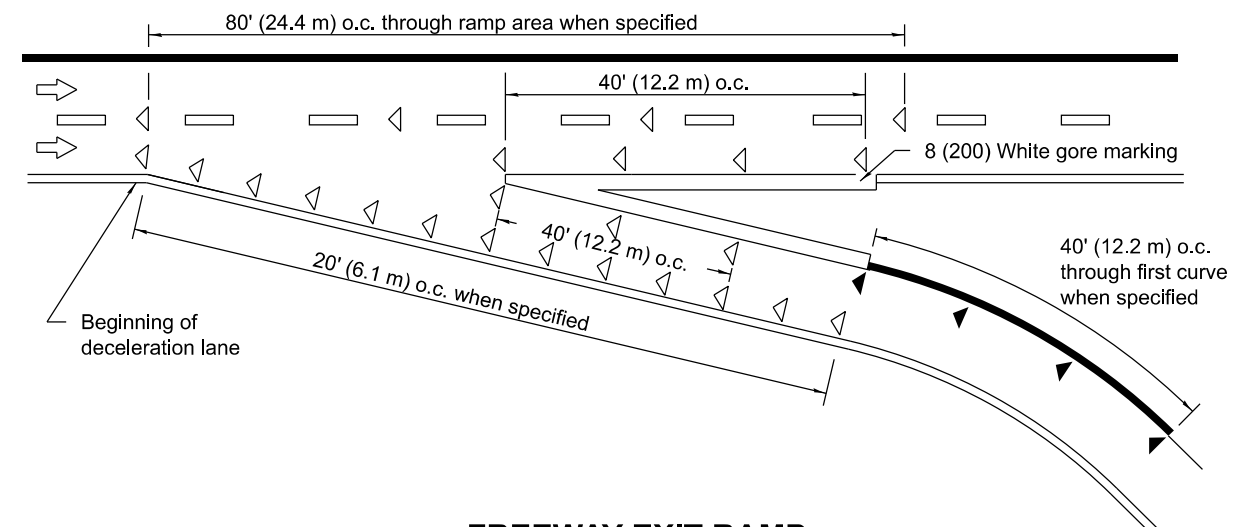

## FREEWAY EXIT RAMP

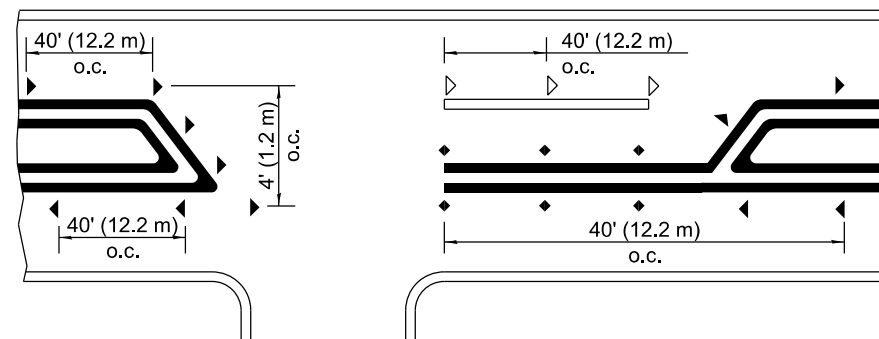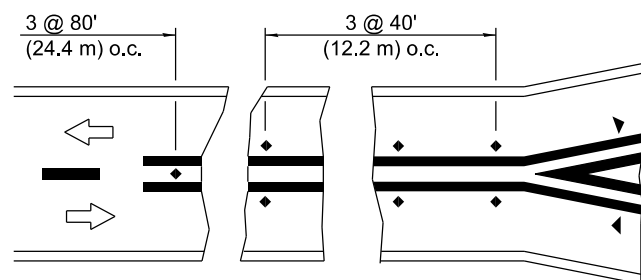

## RURAL LEFT TURN

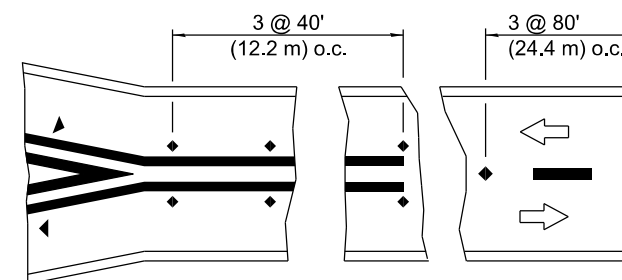

## SYMBOLS

- Yellow stripe
- White stripe
- One-way amber marker
- One-way crystal marker
- Two-way amber marker

All dimensions are in inches (millimeters) unless otherwise shown.

## TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS

STANDARD 781001-04

DATE	REVISIONS
4-1-16	Revised LANE ENDS sign W4-2 to agree with current MUTCD.
1-1-09	Switched units to English (metric).