

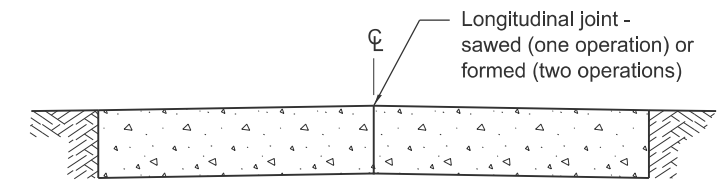



CLASS C

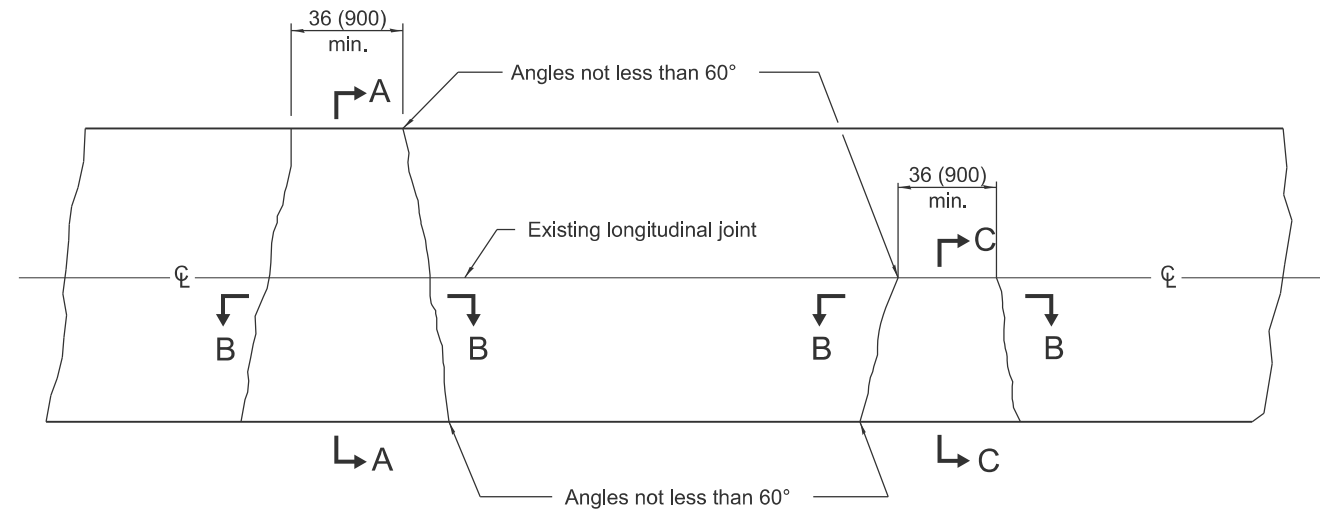


SECTION A-A

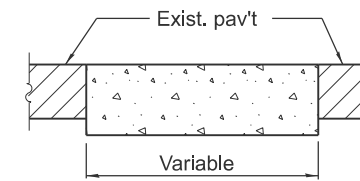

SECTION B-B

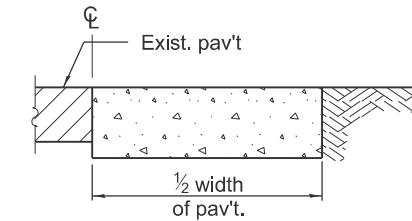



SECTION C-C

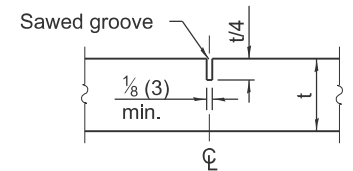


DETAIL OF SAWED CONTRACTION JOINT

Note:
Longitudinal joints shall be as detailed on Standard 420001, except tie bars are not required for patches 20'-0" (6.0 m) or less in length.


CLASS D

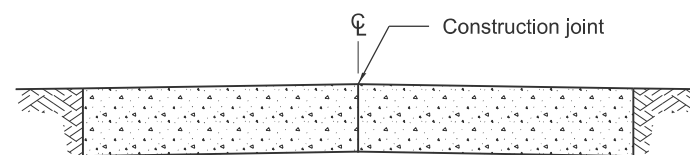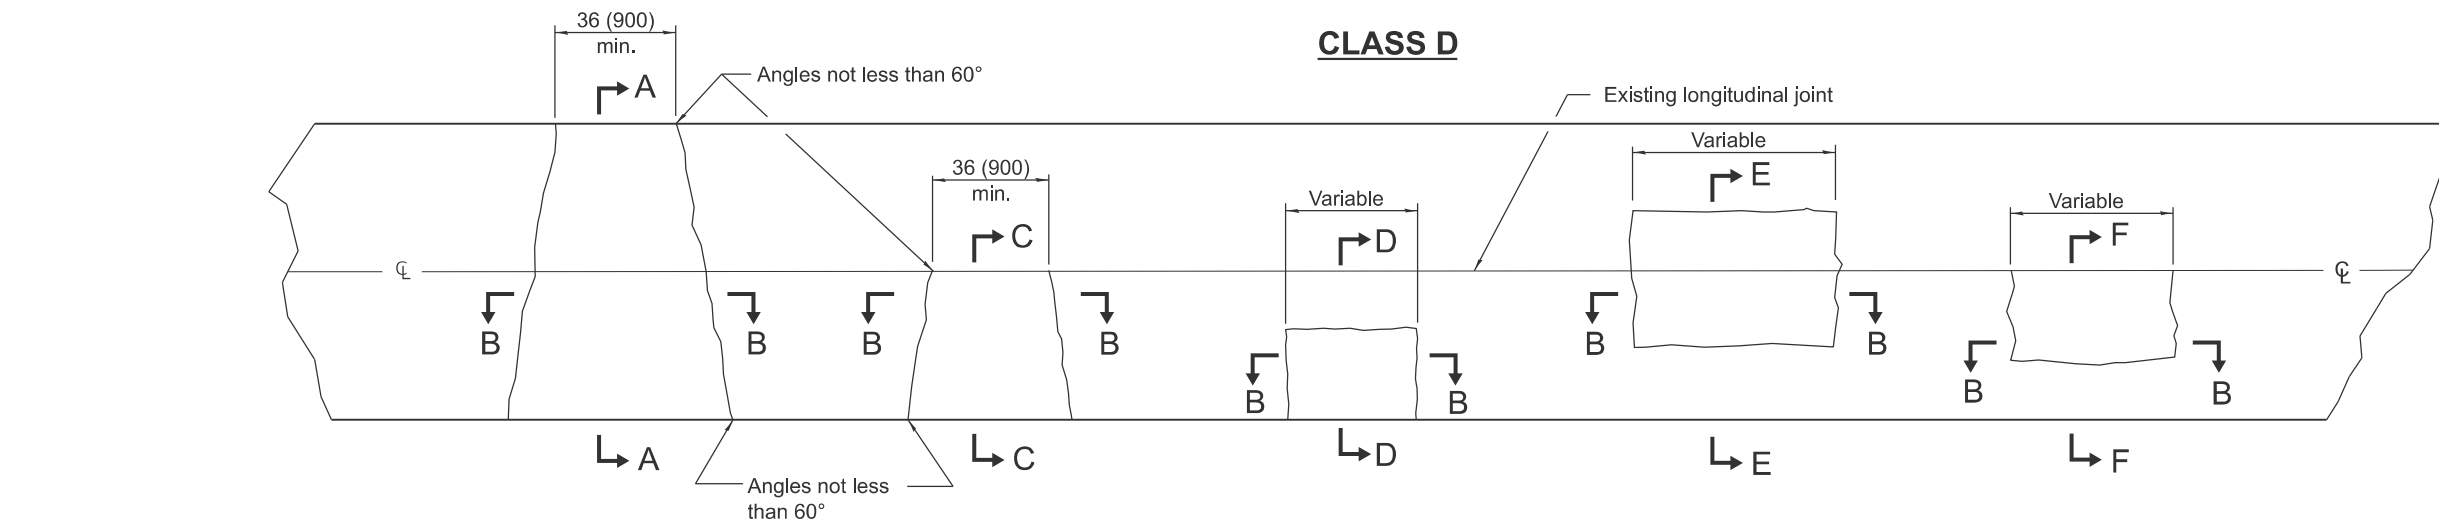


SECTION A-A
(Built in two operations)

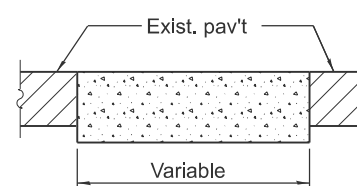

SECTION B-B



SECTION C-C

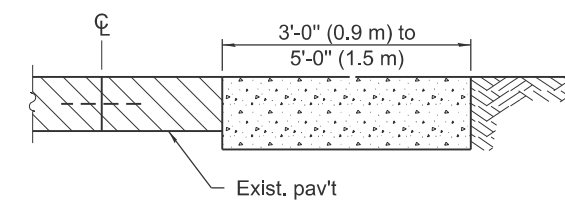


SECTION D-D


GENERAL NOTES

Existing tie bars shall be either cut or removed.
Marginal bars shall be cut.

All dimensions are in inches (millimeters)
unless otherwise shown.

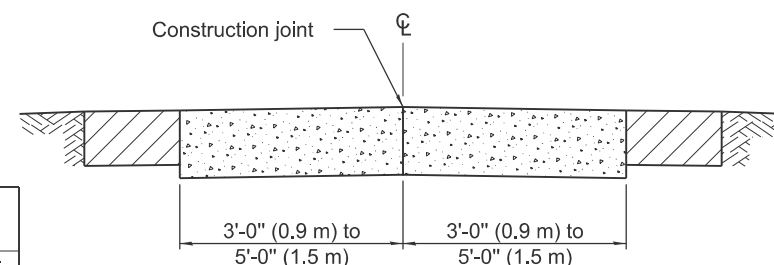

SECTION E-E
(Built in two operations)

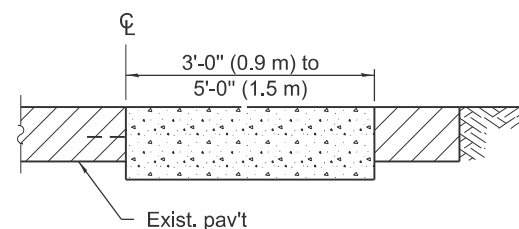

SECTION F-F

DATE	REVISIONS
1-1-26	Deleted triangular patches and
	Section D-D for Class C.
1-1-08	Switched units to English (metric).

CLASS C and D PATCHES

STANDARD 442201-04